APPENDIX 3A

UNITIZATION PROCEDURES FOR BOXED WHITE PHOSPHORUS (WP) AND PLASTICIZED WHITE PHOSPHORUS (PWP) LOADED AMMUNITION ON 4-WAY ENTRY PALLETS


CARTRIDGE, 75MM, PACKED 2 PER WOODEN BOX, UNITIZED 18 BOXES PER 35" X $45\frac{1}{2}$ " PALLET; APPROX BOX SIZE $34\frac{1}{8}$ " L X $12\frac{1}{4}$ " W X $7\frac{5}{8}$ " H

PALLET UNIT DATA									
ITEMS INC	LUDED	HAZARD CLASSIFICATION				WEIGHT			
NSN	DODIC	DOT CLASS	CG CLASS	QD CLASS	COMP GROUP	(LBS)			
1315- 00-028-4648		А	П-D	(12) 1, 2	Н	1,458			

NOTICE: THIS APPENDIX CANNOT STAND ALONE BUT MUST BE USED IN CONJUNCTION WITH THE BASIC UNITIZATION PROCEDURES DRAWING 19-48-4015-20PA1004.

	REVISIONS	BAK	pt we	-/helle			
		GRG	LOG E	Smit			
			APPROVED U S ARMY ARMAMENT MATERIEL READINESS COMMAND DRSAN - LEP DRSAN - LEP APPROVED BY CONDER OF COMMANDING SERVAL, U. S. ARMY ANTERIEL DEVELOPMENT AND READINESS COMMAND, DARCOM)				
		APPROVED F					
		U.S ARMY DEFENSE AMMUNITION CENTER AND SCHOOL					
		U. S. A	U. S. ARMY DARCOM DRAWING				
			FEBRUARY 1983				
		CLASS	DIVISION	DRAWING	FILE		
		19	48	·40l5/ 3A	20PA 1004		

DO NOT SCALE

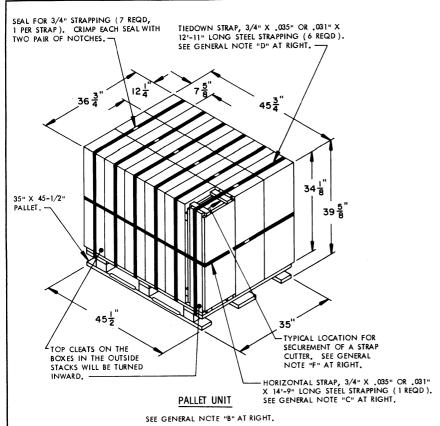

TOTAL WEIGHT------1,458 LBS (APPROX)
CUBE -----38.6 CU FT (APPROX)

18 BOXES OF 75MM CARTRIDGES (2 PER BOX) @ 77 LBS------7,386 LBS (APPROX)

PALLET ----- 65 LBS

BILL OF MATERIAL PALLET, 35" X 45-1/2" ------- 65 LBS STEEL STRAPPING, 3/4" ----- 92.25' REQD------6.59 LBS SEAL FOR 3/4" STRAPPING ----- REQD ----- NIL

TIE PIECE, 1" X 4" X BOX HEIGHT (2 REQD).
NAIL TO LATERAL PIECES W/1-6d NAIL AT EACH END AND TO LONGITUDINAL PIECE

BOX WIDTH VERTICAL PIECE, 2" X 4" X BOX LENGTH BOX LENGTH MINUS 3/4" STRAP BEARING PIECE, 2" X 4" X BOX HEIGHT MINUS 3" (AS REQD). NAIL TO VERTICAL PIECES W/2-10d NAILS AT EACH END. NOTE: WHEN A UNIT HAS MORE THAN SIX BOXES

BOX HEIGHT

STRAP BEARING PIECE, 2" X 4" X BOX WIDTH MINUS 3" (AS REQD). NAIL TO VERTICAL PIECES W/2-100 NAILS AT EACH END. NOTE: WHEN A UNIT HAS MORE THAN FOUR BOXES OMITTED, THE FILLER ASSEMBLY OR ASSEMBLIES LOCATED IN AN OUTER STACK ON THE 35" SIDE OR SIDES OF THE PALLET WILL REQUIRE A "STRAP BEARING PIECE" POSITIONED UNDER THE HORIZONTAL STRAP. STAPLE STRAP TO THE "STRAP BEARING PIECE".

LONGITUDINAL PIECE, 2" X 4" X BOX HEIGHT (4 REQD). NAIL TO VERTICAL PIECES W/2-10d NAILS AT EACH END.

LATERAL PIECE, 2" X 4" X BOX WIDTH MINUS 3" (4 REQD), NAIL TO VERTICAL PIECES W/2-10d NAILS AT EACH END.

FILLER ASSEMBLY (FOR MINUS ONE BOX)

PAGE 2

PIECE" .-

W/2-6d NAILS.

(4 REQD).

OMITTED, THE FILLER ASSEMBLY OR ASSEMBLIES LOCATED IN AN

WILL REQUIRE A "STRAP BEARING PIECE" POSITIONED UNDER THE HORIZONTAL STRAP. STAPLE STRAP TO THE "STRAP BEARING

OUTER STACK ON THE 45-1/2" SIDE OR SIDES OF THE PALLET

GENERAL NOTES

- A. THIS APPENDIX CANNOT STAND ALONE BUT MUST BE USED IN CONJUNCTION WITH THE BASIC UNITIZATION PROCEDURES DRAWING 19-48-4015-20PA1004. TO PRODUCE AN APPROVED UNIT LOAD, ALL PERTINENT PROCEDURES, SPECIFICATIONS AND CRITERIA SET FORTH WITHIN THE BASIC DRAWING WILL APPLY TO THE PROCEDURES DELINEATED IN THIS APPENDIX. ANY EXCEP-TIONS TO THE BASIC PROCEDURES ARE SPECIFIED IN THIS APPENDIX.
- B. DIMENSIONS, CUBE AND WEIGHT OF A PALLET UNIT WILL VARY SLIGHTLY DEPENDING UPON THE ACTUAL DIMENSIONS OF THE BOXES AND THE WEIGHT OF THE SPECIFIC ITEM BEING UNITIZED.
- C. INSTALL THE HORIZONTAL STRAP TO ENCIRCLE THE LAYER OF BOXES ON THE PALLET. HORIZONTAL STRAP MUST BE TEN-SIONED AND SEALED PRIOR TO APPLICATION OF TIEDOWN STRAPS.
- D. INSTALL EACH TIEDOWN STRAP TO PASS UNDER THE DECK/ STRINGER BOARDS OF THE PALLET AND TO BE LOCATED AS SHOWN. TIEDOWN STRAPS WILL NOT BE APPLIED UNTIL THE HORIZONTAL STRAPS HAVE BEEN TENSIONED AND SEALED.
- E. THE FOLLOWING DARCOM DRAWINGS ARE APPLICABLE FOR OUTLOADING AND STORAGE OF THE ITEMS COVERED BY THIS APPENDIX.

CARLOADING----- DRAWING 19-48-4115-5PA 1002 TRUCKLOADING -----DRAWING 19-48-4117-11PA 1003 STORAGE ----- DRAWING 19-48-4118-1-2-3-4-14-22-

- F. FOR METHOD OF SECURING A STRAP CUTTER TO THE PALLET UNIT, SEE DARCOM DRAWING 19-48-4127-20P1000.
- G. IF ITEMS COVERED HEREIN ARE UNITIZED PRIOR TO ISSUANCE OF THIS APPENDIX, THE BOXES NEED NOT BE REUNITIZED SOLELY TO CONFORM TO THIS APPENDIX.
- H. THE UNITIZATION PROCEDURES DEPICTED HEREIN MAY ALSO BE USED FOR UNITIZING 75MM CARTRIDGES WHEN IDENTIFIED BY DIFFERENT NATIONAL STOCK NUMBERS (NSN.) THAN WHAT IS SHOWN ON THE TITLE PAGE, PROVIDED THE BOX PACK DOES NOT VARY FROM WHAT IS DELINEATED HEREIN. THE EXPLOSIVE CLASSIFICATION OF OTHER ITEMS MAY BE DIFFERENT THAN WHAT IS SHOWN.
- IF THERE IS A NEED TO USE FILLER ASSEMBLIES AND AT LEAST TWO PALLET UNITS ARE BEING CONSTRUCTED, NOT MORE THAN 14 FILLERS WILL BE INSTALLED IN ANY ONE PALLET UNIT. ADDI-TIONAL FILLERS CAN BE PUT IN A SECOND PALLET UNIT AS
 REQUIRED WHEN THE QUANTITY OF 14 FILLERS IN THE FIRST REQUIRED WHEN THE QUANTITY OF 14 FILLERS IN THE FIRST REDUCED PALLET UNIT IS INSUFFICIENT TO SATISFY THE TOTAL REDUCTION NEEDED. USING TWO PALLET UNITS TO SATISFY THE PALLETIZATION CRITERIA APPLICABLE TO LESS-THAN-FULL PALLET UNITS IS AN EXCEPTION TO THE BASIC PROCEDURES. HOWEVER, THE EXCEPTION IS NECESSARY FOR THE AMMUNITION PACK COVERED BY THIS APPENDIX, TO MOST EFFECTIVELY GET AN ACCEPTABLE, COMPACT AND SOUND PALLET UNIT.