APPENDIX 121L

UNITIZATION PROCEDURES FOR BOXED AMMUNITION AND COMPONENTS ON 4-WAY ENTRY PALLETS


CAP, BLASTING, PACKED 500 PER WOODEN BOX, UNITIZED 48 BOXES PER 40" X 48" PALLET; APPROX BOX SIZE 16" L X 10" W X 9" H

PALLET UNIT DATA									
ITEMS INCLUDED		HAZ	WEIGHT						
NSN	DODIC	DOT CLASS	CG CLASS	QD CLASS	COMP GROUP	(LBS)			
1375- 00-028-5225	M130	Α	ΔШ	1. 1	В	3, 739			

NOTICE: THIS APPENDIX CANNOT STAND ALONE BUT MUST BE USED IN CONJUNCTION WITH THE BASIC UNITIZATION PROCEDURES DRAWING 19-48-4116-20PA1002.

REV	DRAFTSMAN	PT WR	F/WRF			
	1	GRECKER /	MA	Ornet		
H - K		APPROVED U. S. ARMY ARMAMENT MATERIEL HEADINESS COMMAND "" "" "" "" "" "" "" "" ""				
		APPROVED BY ORDER OF COMMANDING GENERAL U. S. ARMY MATERIEL DEVELOPMENT AND READINESS COMMAND (DARCOM)				
	1	US ARMY DEFENSE AMMUNITION CENTER AND SCHOOL				
		U. S. ARMY DARCOM DRAWING				
		DECEMBER 1982				
		CLASS	DIVISION	DRAWING	FILE	
	1	19	48	4116/ I2IL	20PA 1002	

DO NOT SCALE

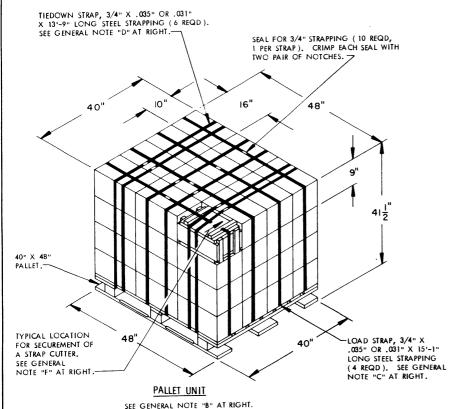

GENERAL NOTES

- A. THIS APPENDIX CANNOT STAND ALONE BUT MUST BE USED IN CONJUNCTION WITH THE BASIC UNITIZATION PRO IN CONJUNCTION WITH THE BASIC UNTILIZATION FAC-CEDURES DRAWING 19-48-4116-20PA1002. TO PRODUCE AN APPROVED UNIT LOAD, ALL PERTINENT PROCEDURES, SPECIFICATIONS AND CRITERIA SET FORTH WITHIN THE BASIC DRAWING WILL APPLY TO THE PROCEDURES DELINEATED IN THIS APPENDIX. ANY EXCEPTIONS TO THE BASIC PRO-CEDURES ARE SPECIFIED IN THIS APPENDIX.
- B. DIMENSIONS, CUBE AND WEIGHT OF A PALLET UNIT WILL VARY SLIGHTLY DEPENDING UPON THE ACTUAL DIMENSIONS OF THE BOXES AND THE WEIGHT OF THE SPECIFIC ITEM BEING UNITIZED.
- C. THE LOAD STRAPS WILL BE PRE-POSITIONED ON THE PALLET DECK PRIOR TO PLACING BOXES ON THE PALLET.
- D. INSTALL EACH TIEDOWN STRAP TO PASS UNDER THE TOP DECK BOARDS OF THE PALLET AND TO BE LOCATED AS SHOWN. TIEDOWN STRAPS WILL BE TENSIONED AND SEALED PRIOR TO THE LOAD STRAPS.
- E. THE FOLLOWING DARCOM DRAWINGS ARE APPLICABLE FOR OUTLOADING AND STORAGE OF THE ITEMS COVERED BY THIS APPENDIX.

22PA 1002

- FOR METHOD OF SECURING A STRAP CUTTER TO THE PALLET UNIT, SEE DARCOM DRAWING 19-48-4127-20P1000.
- G. IF ITEMS COVERED HEREIN ARE UNITIZED PRIOR TO ISSUANCE OF THIS APPENDIX, THE BOXES NEED NOT BE REUNITIZED SOLELY TO CONFORM TO THIS APPENDIX.
- H. THE UNITIZATION PROCEDURES DEPICTED HEREIN MAY ALSO THE UNITIZATION PROCEDURES DEPICIED REREIN MAY ALSO
 BE USED FOR UNITIZING BLASTING CAPS WHEN IDENTIFIED
 BY DIFFERENT NATIONAL STOCK NUMBERS (NSN.) THAN
 WHAT IS SHOWN ON THE TITLE PAGE, PROVIDED THE BOX
 PACK DOES NOT VARY FROM WHAT IS DELINEATED HEREIN.
 THE EXPLOSIVE CLASSIFICATION OF OTHER ITEMS MAY BE DIFFERENT THAN WHAT IS SHOWN.

BILL OF MATERIAL

PALLET -----

48 BOXES OF BLASTING CAPS (500 PER BOX) @ 76 LBS ----- 3,648 LBS (APPROX)

TOTAL WEIGHT----- 3,739 LBS (APPROX

11 LBS

_____46.1 CU FT (APPROX)

