

APPROVED BY  
BUREAU OF EXPLOSIVES

*J. H. Haynes*

DATE 1-11-96

# LOADING AND BRACING (CL & LCL) IN BOXCARS OF 120MM CARTRIDGES PACKED IN PA116 METAL CONTAINERS, UNITIZED ON A 44" X 40" METAL PALLET

- THIS OUTLOADING PROCEDURE DRAWING INCLUDES PROCEDURES FOR CONVENTIONAL TYPE BOXCARS, BOXCARS EQUIPPED WITH MECHANICAL BRACING DEVICES OF VARIOUS DESIGN AND MANUFACTURE, AND CUSHIONED BOXCARS EQUIPPED WITH LOAD DIVIDER BULKHEADS.

U.S. ARMY MATERIEL COMMAND DRAWING				
APPROVED, U.S. ARMY INDUSTRIAL OPERATIONS COMMAND	DRAFTSMAN	TECHNICIAN	ENGINEER	
<i>James E. Stackwick</i>		R. HAYNES		
APPROVED BY ORDER OF COMMANDING GENERAL, U.S. ARMY MATERIEL COMMAND	VALIDATION ENGINEERING DIVISION	TRANSPORTATION ENGINEERING DIVISION	LOGISTICS ENGINEERING OFFICE	
<i>James W. ...</i>	<i>J.M.H.</i>	<i>G.L. Willis</i>	<i>J.J. ...</i>	
U.S. ARMY DEFENSE AMMUNITION CENTER AND SCHOOL	AUGUST 1995			
	CLASS	DIVISION	DRAWING	FILE
	19	48	4242/48	5PM1004

DO NOT SCALE

PROJECT CA 254/48-88

**GENERAL NOTES**

(GENERAL NOTES CONTINUED)

- A. THIS DOCUMENT HAS BEEN PREPARED AND ISSUED IN ACCORDANCE WITH AR 740-1 AND AUGMENTS TM 743-200-1 (CHAPTER 5).
- B. THE OUTLOADING PROCEDURES SPECIFIED IN THIS DRAWING ARE APPLICABLE FOR 120MM CARTRIDGES PACKED IN THE PA116 CONTAINER AND UNITIZED ON A 44" X 40" METAL PALLET. SEE THE PICTORIAL VIEW ON PAGE 5. REFER TO AMC DRAWING 19-48-4231/48-20PM1006 FOR UNITIZATION PROCEDURES FOR THE PA116 SERIES CONTAINERS.
- C. THE OUTLOADING PROCEDURES DEPICTED WITHIN THIS DOCUMENT ARE APPLICABLE FOR SHIPMENTS IN CONVENTIONAL TYPE BOX-CARS, FOR SHIPMENTS IN BOXCARS EQUIPPED WITH VARIOUS TYPES OF SELF-CONTAINED MECHANICAL BRACING DEVICES, AND FOR SHIPMENTS IN CUSHIONED BOXCARS EQUIPPED WITH LOAD DIVIDER BULKHEADS.
- D. CAUTION: METAL CARTRIDGE CONTAINERS THAT ARE FLUSH WITH OR OVERHANG THE PALLET END MUST NOT BE ALLOWED TO CONTACT STEEL ENDWALLS OF BOXCARS. THIS TYPE OF UNIT LOAD SHOULD BE SHIPPED IN BOXCARS HAVING WOOD ENDWALLS. IF CARS WITH WOOD ENDWALLS ARE NOT AVAILABLE, AND ALL-STEEL CARS ARE USED, THE ENDWALLS MUST BE LINED WITH DIMENSIONAL LUMBER, PLYWOOD, HARDBOARD, OR SOLID FIBERBOARD. THE LINING SHOULD BE PROVIDED WHEREVER METAL-OF-CONTAINER TO METAL-OF-CAR CONTACT IS POSSIBLE. REFER TO PAGE 36 FOR GUIDANCE.
- E. PALLET UNITS WILL BE POSITIONED WITH THE BASE ENDS OF THE CONTAINERS AGAINST THE CAR ENDWALL. LONGITUDINALLY ADJACENT LENGTHWISE UNITS WILL BE POSITIONED WITH BASE END AGAINST BASE END OR BELL END AGAINST BELL END. CAUTION: PALLET UNITS MUST NOT BE LOADED SO THAT THE CONTAINERS ARE CROSSWISE IN THE CAR.
- F. THE SELECTION OF RAILCARS FOR THE TRANSPORT OF PALLET UNITS OF COMPLETE ROUNDS IS THE RESPONSIBILITY OF THE ORIGINATING CARRIER AND THE SHIPPER. ONLY CARS WHICH HAVE "SOUND" FLOORS AND ARE IN OTHERWISE PROPER CONDITION, IN ACCORDANCE WITH THE REQUIREMENTS OF THE APPLICABLE REGULATORY DOCUMENTS, WILL BE SELECTED.
- G. WHEN SELECTING RAILCARS, EVERY EFFORT SHOULD BE MADE TO OBTAIN BOXCARS THAT DO NOT HAVE BOWED ENDWALLS. CARS HAVING BOWED ENDS CAN BE USED, HOWEVER, IF AN ENDWALL IS BOWED OUTWARD MORE THAN 2" EITHER FROM SIDE TO SIDE OR FROM FLOOR TO ROOF, AN END-OF-CAR BULKHEAD MUST BE INSTALLED TO PROVIDE A "SQUARED OFF" SURFACE FOR THE LOAD AT THE END OF THE CAR. REFER TO PAGE 39 FOR GUIDANCE.

(CONTINUED AT RIGHT)

- H. CONVENTIONAL BOXCARS EQUIPPED WITH SLIDING DOORS HAVE BEEN SHOWN, HOWEVER, THE DEPICTED UNLOADING PROCEDURES ARE ALSO APPLICABLE FOR CONVENTIONAL CARS EQUIPPED WITH PLUG DOORS. CAUTION: DUNNAGE MATERIAL MUST NOT BE NAILED TO ANY PLUG DOOR, WHETHER AUXILIARY OR MAIN. ALSO, AFTER THE PLUG DOORS ON A CAR ARE CLOSED AND READY FOR THE INSTALLATION OF CAR SEALS, A PIECE OF WIRE OF SUITABLE SIZE WILL BE USED IN ADDITION TO AND IN CONJUNCTION WITH EACH CAR SEAL USED TO SEAL THE CAR. THE WIRE WILL BE THREADED THRU THE HOLES IN THE DOOR LATCH ASSEMBLY ONE OR MORE TIMES, AND THE WIRE ENDS WILL BE TWISTED TOGETHER.
- J. THE USE OF AN OFFSET LOADING PATTERN WILL FACILITATE LOADING AND UNLOADING OPERATIONS IN THE DOORWAY AREA OF THE CAR. UNLESS PROHIBITED WITHIN THE SPECIAL NOTES, A FULL LOAD SHOULD BE BUILT USING AN OFFSET LOADING PATTERN. FOR INSTANCE, A LOAD CONSISTING OF AN EVEN NUMBER OF LOAD UNITS AND HAVING TWO MORE LOAD UNITS IN ONE END OF THE CAR THAN IN THE OPPOSITE END, OR A LOAD CONSISTING OF AN ODD NUMBER OF LOAD UNITS AND HAVING ONE MORE LOAD UNIT IN ONE END THAN IN THE OTHER IS CONSIDERED TO BE AN OFFSET LOAD.
- K. OTHER TYPES OF LADING ITEMS MAY BE LOADED IN CARS WHICH ARE PARTIALLY LOADED WITH PALLET UNITS OF CARTRIDGES, PROVIDING THE TOTAL LOAD IS COMPATIBLE, EXISTING DIRECTIVES ARE NOT VIOLATED, AND THE OTHER LADING ITEMS ARE BLOCKED AND BRACED TO EQUAL THE BLOCKING AND BRACING CRITERIA SPECIFIED HEREIN. MIXED ITEMS TO BE SHIPPED IN CARS EQUIPPED WITH MECHANICAL BRACING DEVICES MUST BE SEPARATELY BLOCKED, USING THE PROCEDURES SHOWN FOR THESE CARS AS GUIDANCE.
- L. DUNNAGE LUMBER SPECIFIED THROUGHOUT THIS PROCEDURAL DRAWING IS OF NOMINAL SIZE. FOR EXAMPLE, 2" X 4" MATERIAL IS ACTUALLY 1-1/2" THICK BY 3-1/2" WIDE AND 2" X 6" MATERIAL IS ACTUALLY 1-1/2" THICK BY 5-1/2" WIDE. IF THOSE MEMBERS SPECIFICALLY IDENTIFIED AS "STRUTS" WITHIN THE KEY NUMBERS OF A DEPICTED LOAD ARE SPECIFIED TO BE 4" X 4" MATERIAL, IT IS PERMISSIBLE TO USE TWO LAMINATED PIECES OF 2" X 6" MATERIAL IN LIEU OF EACH 4" X 4" STRUT. DOUBLED 2" X 6" STRUTS WILL BE LAMINATED W/1-10d NAIL EVERY 6".
- M. NOTICE: A STAGGERED NAILING PATTERN WILL BE USED WHEREVER POSSIBLE WHEN NAILS ARE DRIVEN INTO JOINTS OF DUNNAGE ASSEMBLIES. ALSO, A STAGGERED NAILING PATTERN WILL BE USED WHEN DUNNAGE IS NAILED TO THE FLOOR OR SIDEWALL OF THE TRANSPORTING VEHICLE, OR WHEN LAMINATING DUNNAGE. THE NAILING PATTERN WILL BE ADJUSTED AS REQUIRED SO THAT A NAIL DOES NOT PENETRATE INTO OR NEAR A CRACK BETWEEN FLOOR BOARDS OR SIDEWALL BOARDS. ADDITIONALLY, THE NAILING PATTERN FOR AN UPPER PIECE OF LAMINATED DUNNAGE WILL BE ADJUSTED AS REQUIRED SO THAT A NAIL FOR THAT PIECE WILL NOT BE DRIVEN THROUGH ONTO, OR RIGHT BESIDE A NAIL IN A LOWER PIECE.
- N. POWER DRIVEN STAPLES MAY BE USED AS ALTERNATIVE FASTENERS FOR NAILS WHEN CONSTRUCTING DUNNAGE ASSEMBLIES WHICH ARE TO BE USED IN THE DELINEATED BOXCAR LOADS SHOWN THROUGHOUT THIS DRAWING. THE STAPLES TO BE USED MUST BE EQUAL IN LENGTH TO THE SPECIFIED NAIL SIZE AND MUST BE SUBSTITUTED ON A ONE STAPLE FOR ONE NAIL BASIS. STAPLES WHICH ARE 2-1/2" OR LESS IN LENGTH SHOULD BE IN ACCORDANCE WITH FEDERAL SPECIFICATION FF-N-105 AS NEARLY AS PRACTICABLE. STAPLES WHICH ARE LONGER THAN 2-1/2" WILL BE A COMMERCIAL GRADE, OF A QUALITY EQUIVALENT TO THOSE MANUFACTURED BY SENCOR PRODUCTS INCORPORATED. NOTE: STAPLES WILL NOT BE SUBSTITUTED FOR NAILS IN ANY LOAD RESTRAINING FLOOR DUNNAGE APPLICATION.
- O. WHEN STEEL STRAPPING IS SEALED AT AN END-OVER-END LAP JOINT, A MINIMUM OF ONE SEAL WITH TWO PAIR OF NOTCHES WILL BE USED TO SEAL THE JOINT WHEN A NOTCH-TYPE SEALER IS BEING USED. A MINIMUM OF TWO SEALS, BUTTED TOGETHER, WITH TWO PAIR OF CRIMPS PER SEAL WILL BE USED TO SEAL THE JOINT WHEN A CRIMP-TYPE SEALER IS BEING USED. REFER TO THE "STRAP JOINT A" AND "STRAP JOINT B" DETAILS ON PAGE 38 FOR GUIDANCE.
- P. THROUGHOUT THIS PROCEDURAL DRAWING, PORTIONS OF THE BLOCKING COMPONENTS AND OF THE DEPICTED CARS, SUCH AS A CAR SIDEWALL, HAVE BEEN OMITTED FROM THE LOAD VIEW FOR CLARITY PURPOSES.
- Q. THE NUMBER OF LADING UNITS MAY BE ADJUSTED TO FIT THE SIZE OF THE BOXCAR BEING LOADED OR THE QUANTITY TO BE SHIPPED, HOWEVER, THE APPROVED METHODS SPECIFIED HEREIN MUST BE FOLLOWED AS CLOSELY AS POSSIBLE FOR BLOCKING, BRACING, AND STAYING OF THE UNITS. NOTICE: A SHIPMENT WILL BE POSITIONED IN THE RAILCAR IN COMPLIANCE WITH THE WEIGHT DISTRIBUTION REQUIREMENTS OF THE AAR.

**MATERIAL SPECIFICATIONS**

- LUMBER - - - - - : SEE TM 743-200-1 (DUNNAGE LUMBER) AND FED SPEC MM-L-751.
- NAILS - - - - - : FED SPEC FF-N-105; COMMON.
- PLYWOOD - - - - - : COMMERCIAL ITEM DESCRIPTION A-A-55057, TYPE A, CONSTRUCTION AND INDUSTRIAL PLYWOOD, INTERIOR WITH EXTERIOR GLUE, GRADE C-D. IF SPECIFIED GRADE IS NOT AVAILABLE, A BETTER INTERIOR OR AN EXTERIOR GRADE MAY BE SUBSTITUTED.
- SEAL, STRAP - - - - - : ASTM D3953; CLASS H, FINISH A, B (GRADE 2), OR C, DOUBLE NOTCH TYPE, STYLE I, II, OR IV.
- STRAPPING, STEEL - - : ASTM D3953; FLAT STRAPPING, TYPE 1 OR 2, HEAVY DUTY, FINISH A, B (GRADE 2), OR C.
- WIRE, CARBON STEEL - : ASTM A653; ANNEALED AT FINISH, BLACK OXIDE FINISH, .0800" DIA, GRADE 1006 OR BETTER.
- STAPLE, STRAP - - - - : COMMERCIAL GRADE.
- FIBERBOARD - - - - - : FED SPEC PPP-F-320; TYPE SF (SOLID FIBERBOARD), CLASS DOMESTIC, ALL GRADES.
- HARDBOARD - - - - - : ANSI/AHA A135.4, CLASS 1.

## GENERAL NOTES

(FOR CONVENTIONAL TYPE BOXCARS)

- R. IF THE CAR BEING USED FOR A SHIPMENT IS EQUIPPED WITH A NAILABLE METAL FLOOR AND A NAIL SIZE FOR FLOOR NAILING IS MARKED ON THE SIDEWALL OF THE CAR, THAT GUIDANCE SHOULD BE APPLIED TO THE NAILING OF THE "DOORWAY BLOCKING" PIECES IN THE FULL LOADS AND TO THE NAILING TO THE CAR FLOOR OF THE LCL BRACES AND KNEE BRACE ASSEMBLIES IN THE LESS-THAN-FULL LOADS. IF A NAIL SIZE IS NOT SPECIFIED IN THE CAR, 30d NAILS SHOULD BE USED IN LIEU OF THOSE SPECIFIED IN THE APPLICABLE KEY NUMBERS. SEE GENERAL NOTE "M" ON PAGE 2.
- S. NOTICE: WHEN POSITIONING PALLET UNITS IN A CAR, THEY SHOULD BE PLACED TIGHTLY AGAINST A CAR SIDEWALL AND ARE TO BE PRESSED TIGHTLY TOGETHER LENGTHWISE SO AS TO ACHIEVE A TIGHT LOAD. TO AID IN ACHIEVING TIGHTNESS LENGTHWISE IN A FULL LOAD, A LOAD-COMPRESSING JACK MAY BE EMPLOYED IN THE AREA OF THE CENTER GATES TO MOVE THE PALLET UNITS INTO THEIR FINAL SHIPPING POSITION. A HYDRAULIC JACK IS RECOMMENDED FOR THIS OPERATION. CAUTION: WHEN USING A JACK TO COMPACT A LOAD, THE JACK MUST BE USED AGAINST STRONG POINTS OF THE PALLET UNITS, SUCH AS THE JOINTS BETWEEN THE LAYERS OF CONTAINERS ON THE UNIT. PADDING, OF 2" THICK LUMBER OR ANY OTHER MATERIAL OF SIMILAR CONSISTENCY, SHOULD BE PLACED BETWEEN THE JACK AND THE LADING.
- T. LOAD-BLOCKING STRUTS WHICH ARE 48" OR LONGER MUST BE STIFFENED BY THE APPLICATION OF HORIZONTAL AND VERTICAL STRUT BRACING AS SHOWN BY KEY NUMBERS ⑥ AND ⑦ ON PAGE 19. BRACING IS NOT REQUIRED IF THE STRUTS FOR THE LOAD BEING SHIPPED ARE SHORTER THAN 48". THE LENGTH OF THE LOAD-BLOCKING STRUTS SHOULD BE KEPT AS SHORT AS POSSIBLE (APPROX 18" MINIMUM), BUT IN THE EVENT IT IS NECESSARY TO USE STRUTS WHICH ARE 8'-0" OR MORE IN LENGTH, IT WILL BE NECESSARY TO APPLY AN ADDITIONAL SET OF HORIZONTAL AND VERTICAL STRUT BRACING PIECES. STRUT BRACING SHOULD BE APPLIED SO AS TO PROVIDE NEARLY EQUAL SPACES BETWEEN THE BRACING PIECES AND THE CENTER GATES AND/OR BETWEEN ADJACENT STRUT BRACING PIECES. NOTE THAT HORIZONTAL STRUT BRACING PIECES FOR THE UPPER LEVEL OF STRUTS FOR ALL BUT THE UPPERMOST TIER OF A LOAD MAY BE DIFFICULT TO APPLY TO THE TOP SURFACES OF THE STRUT AS DEPICTED. STRUT BRACING WILL BE EQUALLY EFFECTIVE IF APPLIED TO THE UNDER SIDE OF THOSE STRUTS.
- U. TO ACHIEVE A TIGHTLY BLOCKED LOAD, A STRUT WILL BE CUT APPROXIMATELY 1/4" TO 3/8" LONGER THAN THE MEASURED DISTANCE BETWEEN THE STRUT BEARING AREAS ON THE TWO CENTER GATES. MEASUREMENTS FOR STRUT LENGTHS NEED TO BE ACCOMPLISHED AT SEVERAL PLACES DURING THE BLOCKING AND BRACING PROCESS. CARE MUST BE EXERCISED WHEN MEASURING FOR AND INSTALLING STRUTS. THE SPECIFIED APPROXIMATE DIMENSION FOR A STRUT LENGTH MAY BE ADJUSTED, AS NECESSARY, TO PROVIDE FOR A TIGHTLY BLOCKED LOAD WITHOUT DISTORTING, DENTING OR OTHERWISE DAMAGING THE CONTAINERS. ONE END OF THE STRUT WILL BE POSITIONED AT ITS BEARING AREA JUST ABOVE THE STRUT LEDGER ON ONE GATE. THE OTHER END, WHICH CAN BE BEVELED ON THE LOWER CORNER IF DESIRED, WILL THEN BE DRIVEN DOWNWARD UNTIL IT CONTACTS THE STRUT LEDGER ON THE OTHER GATE. EACH END OF THE STRUT WILL BE TOENAILED TO THE ADJACENT CENTER GATE, AS SPECIFIED WITHIN THE KEY NUMBERS FOR A LOAD, IN SUCH A MANNER SO THAT AS NEARLY AS PRACTICAL EQUAL LENGTHS OF A NAIL ARE EMBEDDED IN THE STRUT AND IN THE VERTICAL PIECE OF THE CENTER GATE. SEE THE "BEVEL-CUT" DETAIL ON PAGE 38 FOR BEVELING INSTRUCTIONS AND THE "STRUT INSTALLATION" DETAIL ON THAT PAGE FOR A PICTORIAL VIEW SHOWING THE PROPER POSITIONING OF A BEVELED STRUT FOR INSTALLATION. NOTE THAT THE UPPER CORNER NEEDS TO BE BEVELED ONLY IF THE STRUTS ARE VERY SHORT. IF ONLY ONE END IS BEVEL CUT, THE BEVELED EDGE WILL BE PLACED IN THE DOWNWARD POSITION SO THAT IT WILL ALLOW THE STRUT END TO SLIDE MORE FREELY DOWN THE FACE OF THE VERTICAL PIECE ON THE ADJACENT CENTER GATE AS THE STRUT IS DRIVEN DOWN INTO ITS FINAL BLOCKING POSITION.
- V. WHERE 2" X 2" PIECES ARE SPECIFIED FOR STRUT LEDGERS, 2" X 4" MATERIAL MAY BE SUBSTITUTED, IF DESIRED.
- W. FOR ADDITIONAL GUIDANCE, ATTENTION IS DIRECTED TO THE "SPECIAL NOTES" SECTIONS WHICH ARE IMMEDIATELY ADJACENT TO THE DEPICTED OUTLOADING METHODS.

## GENERAL NOTES

(FOR BOXCARS EQUIPPED WITH MECHANICAL BRACING DEVICES)

- X. THE OUTLOADING PROCEDURES FOR BOXCARS EQUIPPED WITH MECHANICAL BRACING DEVICES MAY BE ADAPTED AS REQUIRED TO FACILITATE THE USE OF BOXCARS EQUIPPED WITH VARIOUS TYPES OF SELF-CONTAINED MECHANICAL BRACING DEVICES, HOWEVER, FIXED OR ADJUSTABLE WALL MEMBERS AND DOORWAY MEMBERS WITHIN THESE CARS MUST PROVIDE FOR THE INSTALLATION OF LOAD BLOCKING CROSS MEMBERS AT THE HEIGHTS SPECIFIED. CAUTION: BOXCARS EQUIPPED WITH MEMBERS WHICH DO NOT MEET THE LOCATION REQUIREMENTS MUST NOT BE USED.
1. FOR BLOCKING THE LOAD WHICH IS DEPICTED, A CROSS MEMBER WILL NOT BE RELIED UPON TO RETAIN MORE LADING ON EITHER SIDE THAN AS SHOWN. VOIDS LENGTHWISE WITHIN THE LOAD MUST BE HELD TO A MINIMUM AND CROSS MEMBERS MUST BE PLACED AGAINST THE LADING AS TIGHTLY AS THE SPACING OF THE LOCKING HOLES IN THE WALL MEMBERS PERMIT. LOCKING BARS (LEVER JACKS) SHOULD BE USED FOR THIS PURPOSE. AN ADDITIONAL 1/2" OF ADJUSTMENT CAN BE MADE BY TURNING A CROSS MEMBER END-FOR-END WHEN LOCKING PINS ON THE MEMBER ARE OFF-CENTER. NOTE: IT IS RECOMMENDED THAT EACH CROSS MEMBER BE INSTALLED WITH THE ENDS ATTACHED AS NEARLY AS POSSIBLE IN "MATED" POSITIONS (AT EQUAL HEIGHTS AND AT EQUAL DISTANCES FROM THE END OF THE CAR).
2. CAUTION: ALL BLOCKING AND BRACING COMPONENTS IN EMPTY CARS AND ALL UNUSED COMPONENTS IN LOADED CARS MUST BE "SECURED" FOR SHIPMENT -- ADJUSTABLE WALL MEMBERS TO VERTICAL WALL ATTACHMENT RAILS, AND CROSS MEMBERS TO ADJUSTABLE WALL MEMBERS OR TO FIXED HORIZONTAL WALL MEMBERS OR TO DOORWAY MEMBERS, AND DOORWAY MEMBERS TO DOOR POSTS. COMPONENTS ASSIGNED TO EACH CAR MUST REMAIN THEREWITH EVEN THOUGH UNUSED DURING SOME SHIPMENTS.
- Y. IN A CAR EQUIPPED WITH ADJUSTABLE WALL MEMBERS, PROVIDING THE FIXED WALL MEMBERS WHICH ARE PRESENT IN SOME "ADJUSTABLE" CARS ARE NOT PROPERLY POSITIONED TO PROVIDE SIDE BEARING SURFACES BETWEEN THE UNITS AND THE CAR SIDEWALLS, ADJUSTABLE WALL MEMBERS (AS REQUIRED) MUST BE INSTALLED TO PROVIDE A MINIMUM OF ONE SURFACE AREA FOR SIDE BEARING AT SOME LOCATION WITHIN THE UPPER HALF OF EACH UNIT.
- Z. FOR ADDITIONAL GUIDANCE, ATTENTION IS DIRECTED TO THE "SPECIAL NOTES" SECTION WHICH IS IMMEDIATELY ADJACENT TO THE DEPICTED OUTLOADING METHOD.

GENERAL NOTES


(GENERAL NOTES CONTINUED)

(FOR CARS EQUIPPED WITH LOAD DIVIDER BULKHEADS)

- AA. CAUTION: FOR CUSHIONED BOXCARS EQUIPPED WITH LOAD DIVIDER BULKHEADS, ONLY CARS EQUIPPED WITH LOAD DIVIDERS MANUFACTURED BY EVANS, EQUIPCO, OR PRECO MAY BE USED. LOAD DIVIDERS MANUFACTURED BY TRANSCO ARE NOT ACCEPTABLE WHETHER OF ALUMINUM OR STEEL CONSTRUCTION. THE DEPICTED PROCEDURES ARE APPLICABLE FOR CARS OF VARIOUS LENGTHS AND WIDTHS. THE AAR MECHANICAL DESIGNATION CLASS FOR THESE CARS, AS IDENTIFIED IN "THE OFFICIAL RAILWAY EQUIPMENT REGISTER", WILL BE RBL, XL, OR XLI.
- BB. THE USE OF LOAD DIVIDER EQUIPPED CARS WILL ELIMINATE THE NEED FOR CENTER GATES AND STRUTS, AND GATE HOLD DOWNS (WHEN APPLICABLE) WHICH ARE REQUIRED IN CONVENTIONAL BOXCAR LOADS. THIS WILL ACCOUNT FOR A CONSIDERABLE SAVING IN MATERIAL AND LABOR COSTS. THEREFORE, EVERY EFFORT SHOULD BE MADE TO ACQUIRE CUSHIONED CARS EQUIPPED WITH LOAD DIVIDERS FOR SHIPMENT OF COMPLETE ROUNDS. NOTICE: ONLY CUSHIONED CARS THAT HAVE SLIDING CENTER SILL TYPE CUSHIONED DEVICES OR END-OF-CAR TYPE DEVICES WHICH HAVE AT LEAST 15" OF TRAVEL ARE ACCEPTABLE.
- CC. IF NAILING TO A CAR SIDEWALL IS NOT REQUIRED, BOXCARS EQUIPPED WITH ADJUSTABLE SIDE FILLERS THAT HAVE 3/8" OR THICKER PANELS MAY BE USED, HOWEVER, THESE SIDE FILLERS MUST NOT BE USED FOR LATERAL BLOCKING; THEY MUST BE RETRACTED AND LOCKED AGAINST THE CAR SIDEWALL. A "FILL PIECE" MUST BE INSTALLED IN THE VOID BETWEEN THE CAR SIDEWALL AND THE SIDE FILLER PANEL. SEE THE "TYPICAL TYPE A" VIEW ON PAGE 44 FOR GUIDANCE. IF THE BACK OF THE SIDE FILLER PANELS ARE REINFORCED WITH VERTICAL AND HORIZONTAL STEEL MEMBERS AS SHOWN IN THE "TYPICAL TYPE B" VIEW ON PAGE 44, THE "FILL PIECE" MATERIAL IS NOT REQUIRED.
- DD. NOTICE: AFTER THE LOAD DIVIDER BULKHEADS ARE POSITIONED AGAINST THE LADING, AND THE LOCKING PINS ARE ENGAGED IN THE HOLES OF THE RAILS, THE LOWER LOCKING PINS MUST BE INSPECTED TO ENSURE THAT THE PINS ARE FULLY ENGAGED IN THE LOCKING HOLES. IF THE PINS ARE NOT FULLY SEATED IN THE LOCKING HOLES, THE LINKAGE MECHANISM WILL BE ADJUSTED AS REQUIRED SO THAT THE PINS WILL BE FULLY SEATED INTO THE LOCKING HOLES OF THE LOWER RAILS. IF PRESENT, DEBRIS MUST BE REMOVED FROM BENEATH THE LOCKING HOLES WHICH HAVE BEEN SELECTED FOR SECURING A LOAD DIVIDER BULKHEAD.
- EE. A "STRUT ASSEMBLY" MUST BE INSTALLED BETWEEN THE LOAD DIVIDER BULKHEADS IF THE CAR CONTAINS HAZARD CLASS AND DIVISION 1.1, 1.2, OR 1.3 EXPLOSIVES AND THE LOAD IN EITHER END OF THE CAR WEIGHS 50,000 POUNDS OR MORE. A STRUT ASSEMBLY IS NOT REQUIRED FOR LOADS OF HAZARD CLASS AND DIVISION 1.4 EXPLOSIVES. NOTE THAT THE STRUT ASSEMBLY MAY BE OMITTED FROM LOADS OF HAZARD CLASS AND DIVISION 1.1, 1.2, OR 1.3 EXPLOSIVES WEIGHING 50,000 POUNDS WHEN THE LADING AND ADEQUATE BLOCKING AND BRACING ARE POSITIONED TO COMPLETELY FILL THE SPACE BETWEEN THE INSTALLED BULKHEADS AS SPECIFIED IN GENERAL NOTE "FF-3" BELOW. DETAILS OF STRUT ASSEMBLIES FOR USE BETWEEN 2-PIECE BULKHEADS AND BETWEEN 1-PIECE BULKHEADS ARE SHOWN ON PAGE 43.
- FF. THE NORMAL LOADING PATTERN IN CARS EQUIPPED WITH LOAD DIVIDER BULKHEADS IS TO POSITION THE LADING BETWEEN A CAR ENDWALL AND A LOAD DIVIDER BULKHEAD IN FULL LAYERS. OBVIOUSLY, A LOAD QUANTITY MUST THEN BE A MULTIPLE OF THE NUMBER OF PALLET UNITS WHICH ARE IN ONE LOAD UNIT. A LOAD UNIT IS DEFINED AS A STACK OF CONTAINERS WHICH IS FULL CAR WIDTH BY FULL LOAD HEIGHT BY ONE UNIT IN LENGTH. IF THE QUANTITY TO BE SHIPPED CANNOT BE ATTAINED BY ADJUSTING THE NUMBER OF TIERS IN ONE OR BOTH ENDS OF A CAR, OR BY ADJUSTING THE NUMBER OF LOAD UNITS IN EITHER END OF THE CAR, ONE OF THE FOLLOWING PROCEDURES MUST BE USED IN ORDER TO OBTAIN THE DESIRED QUANTITY.
1. ONE OR MORE RISERS CAN BE POSITIONED WITHIN A LOAD TO INCREASE A LOAD QUANTITY. SEE THE RISER PROCEDURES AND DETAILS ON PAGES 24 AND 25.
  2. THE "GATES AND STRUTS" METHOD OF OMITTING A PALLET UNIT MAY BE USED TO ADJUST A LOAD QUANTITY DOWNWARD BY OTHER THAN A MULTIPLE OF A LOAD UNIT. SEE THE PROCEDURES ON PAGE 20 FOR GUIDANCE.

3. AT LOCATION(S) WHERE K-BRACES MIGHT NORMALLY BE USED IN A LOAD IN A CONVENTIONAL CAR, LOAD DIVIDER BULKHEADS CAN BE POSITIONED. LOADING CAN THEN CONTINUE TOWARD THE CENTER OF THE CAR FROM EACH INSTALLED LOAD DIVIDER BULKHEAD IN A ONE-HIGH LOADING PATTERN. INSTALL CENTER GATES AND STRUTS AS SHOWN IN THE APPLICABLE CONVENTIONAL BOXCAR DRAWING HEREIN TO PROVIDE FOR A TIGHT LOAD BETWEEN THE BULKHEADS.
  4. ONE OR MORE UNITS CAN BE POSITIONED IN CONTACT WITH A LOAD DIVIDER BULKHEAD ON THE CENTER-OF-CAR SIDE. BLOCK AND BRACE WITH LCL BRACES AS SHOWN ON PAGE 34 OR WITH KNEE BRACE ASSEMBLIES, AS SHOWN ON PAGE 30.
- GG. FOR ADDITIONAL GUIDANCE, ATTENTION IS DIRECTED TO THE "SPECIAL NOTES" SECTION WHICH IS IMMEDIATELY ADJACENT TO THE DEPICTED OUTLOADING METHOD.


(CONTINUED AT RIGHT)

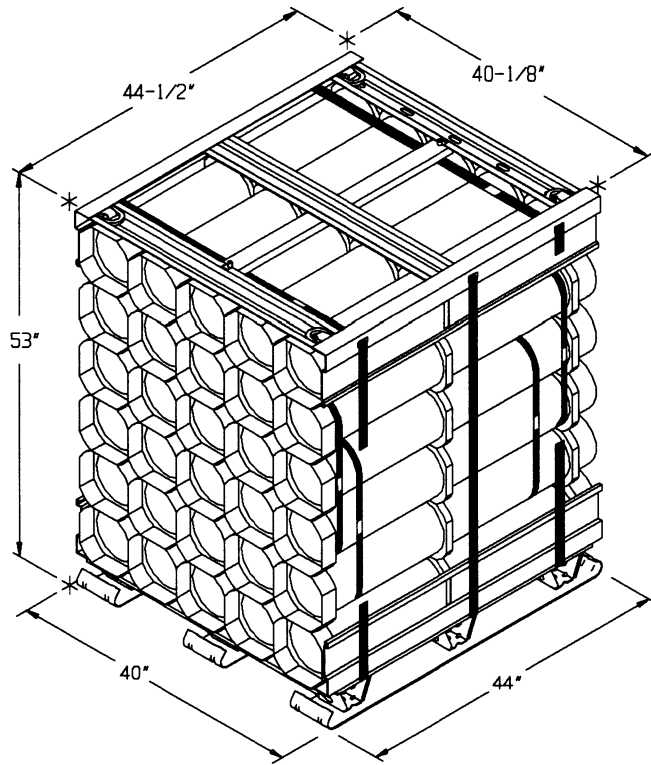

**PALLET UNIT**

CONTAINER - - - - - 30 @ 75 LBS (APPROX)  
 CUBE - - - - - 53.5 CUBIC FEET (APPROX)  
 GROSS WEIGHT - - - - 2,444 LBS (APPROX)


DIRECTION OF ARROW INDICATES  
BASE END OF CONTAINER. SEE  
GENERAL NOTE "E" ON PAGE 2.

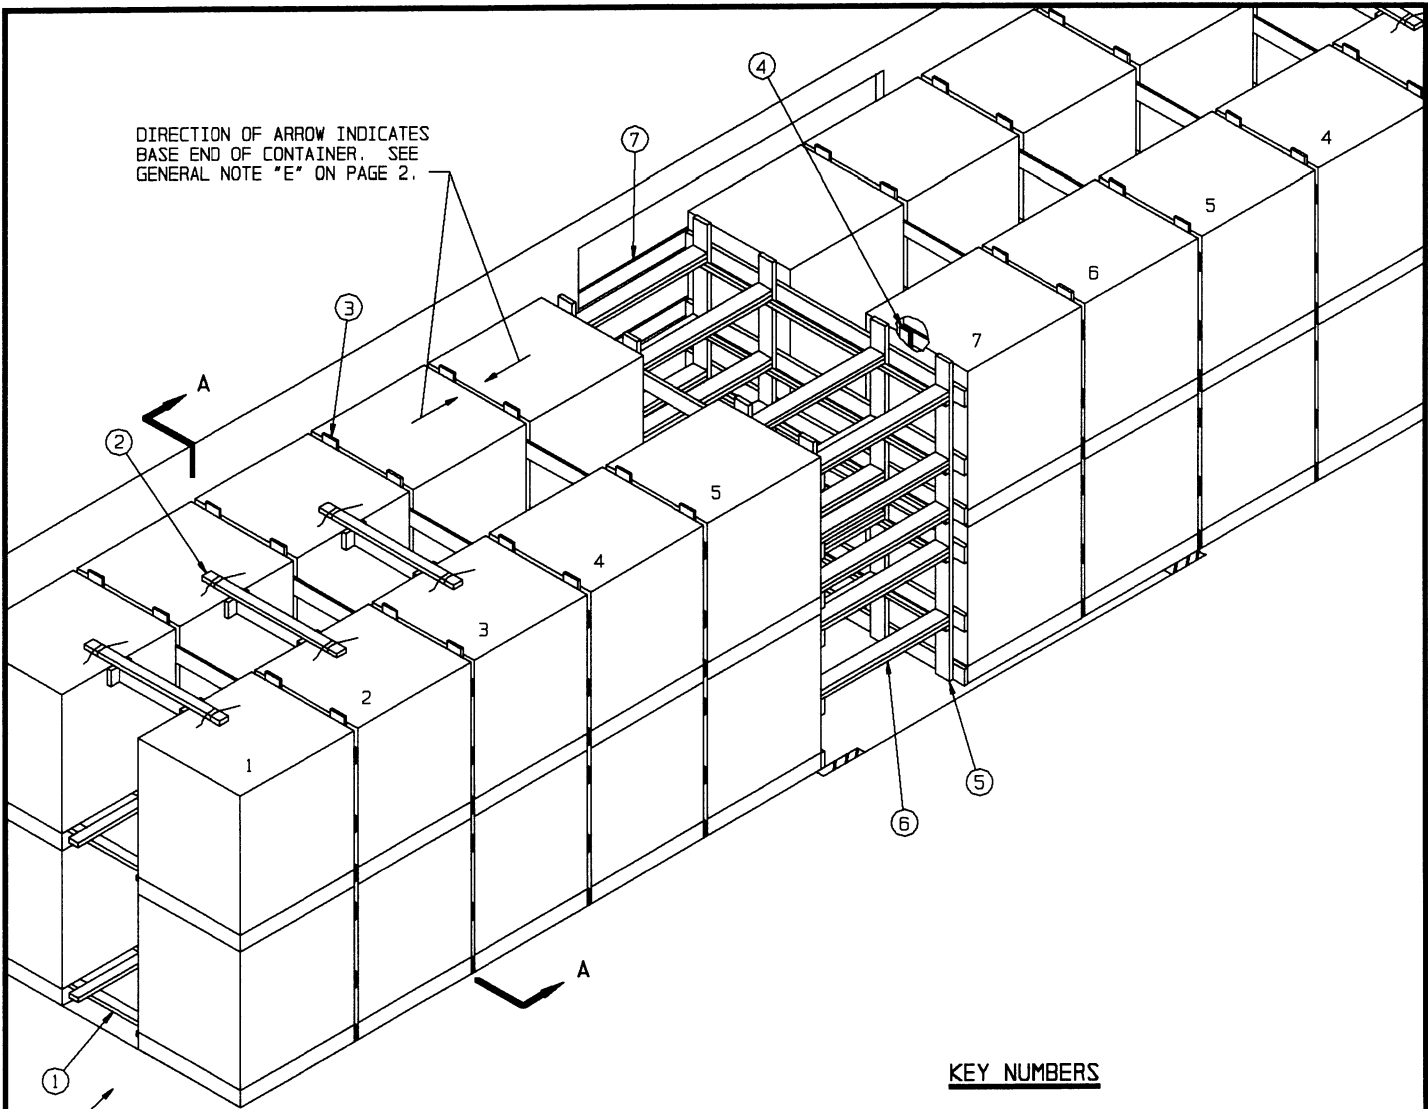

### KEY NUMBERS

SEE GENERAL NOTES  
"D" AND "G" ON  
PAGE 2.

### ISOMETRIC VIEW

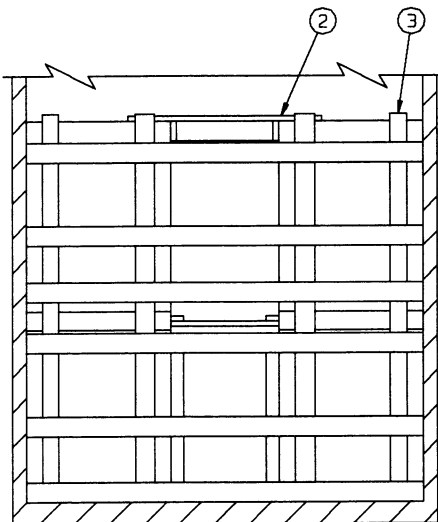

### SECTION A-A

- ① ANTI-SWAY BRACE (24 REQD). SEE THE DETAIL ON PAGE 12. INSTALL BETWEEN LATERALLY ADJACENT PALLET UNITS. SEE GENERAL NOTES "M" AND "N" ON PAGE 2 AND SPECIAL NOTE 3 ON PAGE 7.
- ② TOP-OF-LOAD ANTI-SWAY BRACE (6 REQD). SEE THE DETAIL ON PAGE 12. WIRE TIE TO THE PALLET UNITIZING STRAPS WITH NO 14 GAGE WIRE AS SHOWN BY THE "TIE WIRE APPLICATION" DETAIL ON PAGE 39. SEE SPECIAL NOTE 4 ON PAGE 7.
- ③ SEPARATOR GATE (10 REQD). SEE THE "SEPARATOR GATE A" DETAIL ON PAGE 13. POSITION WITH THE HORIZONTAL PIECES AGAINST THE ALREADY LOADED UNITS. SEE SPECIAL NOTES 5, 7, AND 8 ON PAGE 7.
- ④ STOP PIECE, 1" X 4" X 60" (DOUBLED) (2 REQD). INSTALL ON THE SIDE OPPOSITE THE VERTICAL PIECES OF THE SEPARATOR GATE, PIECE MARKED ③, WHICH IS IN THE DOORWAY AREA. POSITION IN CONTACT WITH THE ADJACENT PALLET UNITS AND NAIL THE FIRST PIECE TO THE HORIZONTAL PIECES W/3-6d NAILS AT EACH JOINT AND CLINCH. NAIL THE SECOND PIECE TO THE FIRST W/5-6d NAILS. SEE SPECIAL NOTE 6 ON PAGE 7.
- ⑤ CENTER GATE (2 REQD). SEE THE "CENTER GATE A" DETAIL ON PAGE 14. SEE SPECIAL NOTES 9 THRU 11 ON PAGE 7.
- ⑥ STRUT, 2" X 6" BY CUT TO FIT (REF: 48") (DOUBLED) (20 REQD). LAMINATE W/1-10d NAIL EVERY 6" AND TOENAIL THE TOP PIECE TO PIECES MARKED ⑤ W/2-16d NAILS AT EACH END. SEE GENERAL NOTES "T" AND "U" ON PAGE 3. SEE SPECIAL NOTE 12 ON PAGE 7.
- ⑦ DOORWAY PROTECTION (2 REQD). SEE THE "DOORWAY PROTECTION" DETAIL ON PAGE 12. NAIL TO THE DOOR POSTS W/12d NAILS. SEE SPECIAL NOTE 8 ON PAGE 7.

(SPECIAL NOTES CONTINUED)

12. IF IT IS DESIRED TO USE 4" X 4" STRUTS IN LIEU OF THE DOUBLED 2" X 6" STRUTS SPECIFIED, IT WILL BE NECESSARY TO USE SIX STRUTS FOR EACH ROW/LAYER IN LIEU OF THOSE SHOWN. THE ADDITION OF A STRUT LEDGER AT THE BOTTOM OF THE VERTICAL PIECES OF "CENTER GATE A" DETAIL ON PAGE 14 WILL BE REQUIRED IN ORDER TO ACCOMMODATE THE ADDED STRUTS. THE 4" X 4" STRUTS MAY BE BEVELED FOR INSTALLATION. SEE THE "BEVEL-CUT" DETAIL ON PAGE 38 FOR BEVELING INSTRUCTIONS, AND THE "STRUT INSTALLATION" DETAIL ON THAT PAGE FOR A PICTORIAL VIEW SHOWING THE PROPER POSITIONING OF A BEVELED STRUT FOR INSTALLATION. NOTE THAT THE UPPER CORNER NEEDS TO BE BEVELED ONLY IF THE STRUTS ARE VERY SHORT. IF ONLY ONE END IS BEVEL-CUT, THE BEVELED EDGE WILL BE PLACED IN THE DOWNWARD POSITION SO THAT IT WILL ALLOW THE STRUT END TO SLIDE MORE FREELY DOWN THE FACE OF THE VERTICAL PIECE ON THE ADJACENT CENTER GATE AS THE STRUT IS DRIVEN DOWN INTO BLOCKING POSITION.
13. DOORWAY PROTECTION IS REQUIRED FOR ALL PALLET UNIT STACKS WHICH ARE COMPLETELY WITHIN THE DOORWAY AREA OR WHICH EXTEND INTO THE DOORWAY AREA BY ONE-HALF OR MORE OF THE STACK WIDTH. THE WOODEN GATE TYPE OF DOORWAY PROTECTION, SHOWN AS PIECE MARKED ⑦ IN THE LOAD ON PAGE 6, IS APPLICABLE FOR BOXCARS EQUIPPED WITH CONVENTIONAL SLIDING DOORS AND NAILABLE DOOR POSTS. REFER TO PAGES 41 AND 42 FOR ALTERNATIVE DOORWAY PROTECTION FOR CARS EQUIPPED WITH CONVENTIONAL SLIDING DOORS. IF THE CAR BEING LOADED IS EQUIPPED WITH PLUG TYPE DOORS OR COMBINATION PLUG AND SLIDING DOORS, NAILED FLOORLINE BLOCKING AND DOORWAY PROTECTION STRAPS MUST BE USED. REFER TO PIECES MARKED ④ AND ⑦ ON PAGE 10 FOR GUIDANCE. TWO DOORWAY PROTECTION STRAPS ARE REQUIRED FOR EACH PALLET STACK AND/OR LOAD UNIT WHICH IS COMPLETELY WITHIN THE DOORWAY AREA OR WHICH IS NOT RETAINED BY AT LEAST SIX INCHES OF CAR SIDEWALL ON BOTH SIDES OF THE CAR. ONE STRAP IS REQUIRED FOR EACH PALLET STACK AND/OR LOAD UNIT WHICH IS RETAINED BY FROM 6" TO ONE-HALF THE PALLET/LOAD UNIT WIDTH. NOTE THAT THE DOORWAY PROTECTION PROCEDURES FOR CARS EQUIPPED WITH PLUG DOORS MAY ALSO BE USED IN CARS EQUIPPED WITH SLIDING DOORS.
14. THE DEPICTED LOAD CAN BE REDUCED TO SUIT THE QUANTITY TO BE SHIPPED. A 2-TIER LOAD CAN BE REDUCED BY A MULTIPLE OF FOUR UNITS, OR A 1-TIER LOAD CAN BE REDUCED BY A MULTIPLE OF TWO UNITS BY OMITTING ONE OR MORE LOAD UNITS FROM THE CENTER PORTION OF THE LOAD. OR, THE ENTIRE TOP TIER CAN BE OMITTED. FOR OTHER METHODS OF REDUCING A LOAD, AND FOR TYPICAL LCL PROCEDURES, REFER TO PAGES 19 THRU 34 FOR GUIDANCE.
15. PALLET UNITS WHICH DO NOT CONTAIN A FULL QUANTITY OF ITEMS CAN BE TRANSPORTED. REFER TO U. S. ARMY AMC DRAWING 19-48-4231/48-20PM1006 FOR LESS THAN FULL PALLET UNITS. FOR "SHIPMENT OF LEFTOVER CONTAINERS", SEE THE DETAILS AND SPECIAL NOTES ON PAGE 35.

SPECIAL NOTES:

1. A 50'-6" LONG BY 9'-2" WIDE WOOD-LINED CONVENTIONAL TYPE BOX CAR EQUIPPED WITH 10'-0" WIDE DOOR OPENINGS IS SHOWN. CARS OF OTHER DIMENSIONS AND CARS HAVING WIDER OR NARROWER DOOR OPENINGS CAN BE USED. SEE GENERAL NOTE "D" ON PAGE 2.
2. A MAXIMUM OF SIXTY OF THESE UNITS FOR AN APPROXIMATE LADING WEIGHT OF 146,420 POUNDS CAN BE PLACED IN A 60'-8" LONG CAR WHEN USING THE DEPICTED PROCEDURES.
3. IF DOORWAY PROTECTION PROCEDURES AS SHOWN ON PAGE 10 ARE USED IN LIEU OF THE WOODEN DOOR GATE TYPE PROTECTION, PIECE MARKED ⑦, NAILED FLOORLINE BLOCKING MUST BE USED IN LIEU OF EACH LOWER ANTI-SWAY BRACE IN THE DOORWAY AREA. NAILED BLOCKING IS REQUIRED FOR ALL PALLET STACKS WHICH ARE COMPLETELY WITHIN THE DOORWAY AREA OR WHICH EXTEND INTO THE DOORWAY AREA BY ONE-HALF OR MORE OF THE STACK WIDTH ON EITHER SIDE OF THE CAR.
4. TOP-OF-LOAD ANTI-SWAY BRACES, SHOWN AS PIECES MARKED ② IN THE LOAD ON PAGE 6, MUST BE INSTALLED IN EACH END OF THE CAR. THREE BRACES ARE REQUIRED IN EACH END OF A LOAD IN A 50'-6" OR 40'-6" LONG CAR; FOUR BRACES ARE REQUIRED IF A 60'-8" CAR IS USED.
5. TO FACILITATE POSITIONING OF THE PALLET UNITS AS LOADING PROGRESSES, POSITION PALLET UNIT STACKS AGAINST THE ENDWALL, THEN POSITION A SEPARATOR GATE, SHOWN AS PIECE MARKED ③, SO THE HORIZONTAL PIECES ARE AGAINST THE PALLET UNITS. REPEAT THIS PROCEDURE FOR THE REMAINING STACKS.
6. SEPARATOR GATES IN THE DOORWAY AREA MUST BE PREVENTED FROM SHIFTING INTO A DOOR OPENING BY THE APPLICATION OF THE STOP PIECES, PIECES MARKED ④. IN CARS EQUIPPED WITH STAGGERED DOORS, STOP PIECES MAY BE REQUIRED ON UP TO FOUR SEPARATOR GATES.
7. SEPARATOR GATES MAY BE FORMED FROM 3/8" OR THICKER PLYWOOD IN LIEU OF DIMENSIONAL LUMBER, IF DESIRED. SEE THE "ALTERNATIVE SEPARATOR GATE A" DETAIL ON PAGE 13 FOR CONSTRUCTION GUIDANCE.
8. WHEN NAILED FLOORLINE BLOCKING IS USED FOR DOORWAY PROTECTION, THE SEPARATOR GATES ADJACENT TO THE NAILED BLOCKING MUST BE MODIFIED. SEE THE DETAILS FOR 2-HIGH AND 1-HIGH MODIFIED SEPARATOR GATES, "SEPARATOR GATE B" AND "SEPARATOR GATE C" ON PAGE 16. THE USE OF MODIFIED SEPARATOR GATES WILL ALLOW THE SEPARATOR GATES TO CLEAR THE NAILED FLOORLINE BLOCKING DURING NORMAL SHIFTING OF THE LOAD.
9. CENTER GATE "A" MAY BE PARTIALLY FORMED FROM 1/2" OR THICKER PLYWOOD, IF DESIRED. PLYWOOD MAY BE USED IN LIEU OF THE 2" X 6" HORIZONTAL PIECES. SEE THE "PLYWOOD CENTER GATE ALTERNATIVE" DETAIL ON PAGE 40 FOR GUIDANCE.
10. FOR EASE OF HANDLING, SPLIT CENTER GATES, WHICH ARE NOT DEPENDENT UPON THE WIDTH OF THE CAR, MAY BE USED AS AN ALTERNATIVE TO THE CAR WIDTH GATES. IN LIEU OF EACH "CENTER GATE A", SHOWN AS PIECE MARKED ⑤ IN THE LOAD ON PAGE 6, INSTALL TWO "CENTER GATES B" AS SHOWN ON PAGE 15. AFTER THE SPLIT GATES AND STRUTS HAVE BEEN INSTALLED, THE SPLIT GATES MUST BE TIED TOGETHER AS DEPICTED BY THE "TIE PIECE APPLICATION" DETAIL ON PAGE 40.
11. DOOR SPANNER TYPE GATE HOLD-DOWN MAY BE USED IN LIEU OF THE DOUBLED 2" X 4" MATERIAL NAILED TO CENTER GATE "A", PROVIDING THE CAR BEING LOADED HAS NAILABLE SIDEWALLS. SEE THE DETAILS ON PAGE 37 FOR GUIDANCE.

(CONTINUED AT LEFT)

BILL OF MATERIAL		
LUMBER	LINEAR FEET	BOARD FEET
1" X 4"	20	7
1" X 6"	988	494
2" X 2"	84	28
2" X 3"	36	18
2" X 4"	357	238
2" X 6"	357	357
NAILS	NO. REQD	POUNDS
6d (2")	1114	6-1/2
10d (3")	680	10-1/2
12d (3-1/4")	82	1-1/2
16d (3-1/2")	80	2
WIRE, NO. 14 GAGE	48' REQD	1 LB

**LOAD AS SHOWN**


ITEM	QUANTITY	WEIGHT (APPROX)
PALLET UNIT	48	-117,312 LBS
DUNNAGE		2,306 LBS
TOTAL WEIGHT		-119,618 LBS (APPROX)

**CAR EQUIPMENT REQUIRED**

ADJUSTABLE WALL MEMBER - - - -	48
(SEE "NOTE ▲" BELOW)	
CROSS MEMBERS - - - - -	32
DOORWAY MEMBERS - - - - -	8


NOTE ▲: FOR CARS EQUIPPED WITH FIXED WALL MEMBERS LOCATED AT THE HEIGHTS SPECIFIED IN "SECTION B-B" OMIT ALL REFERENCE TO "ADJUSTABLE WALL MEMBERS".

DIRECTION OF ARROW INDICATES BASE END OF CONTAINER. SEE GENERAL NOTE "E" ON PAGE 2.

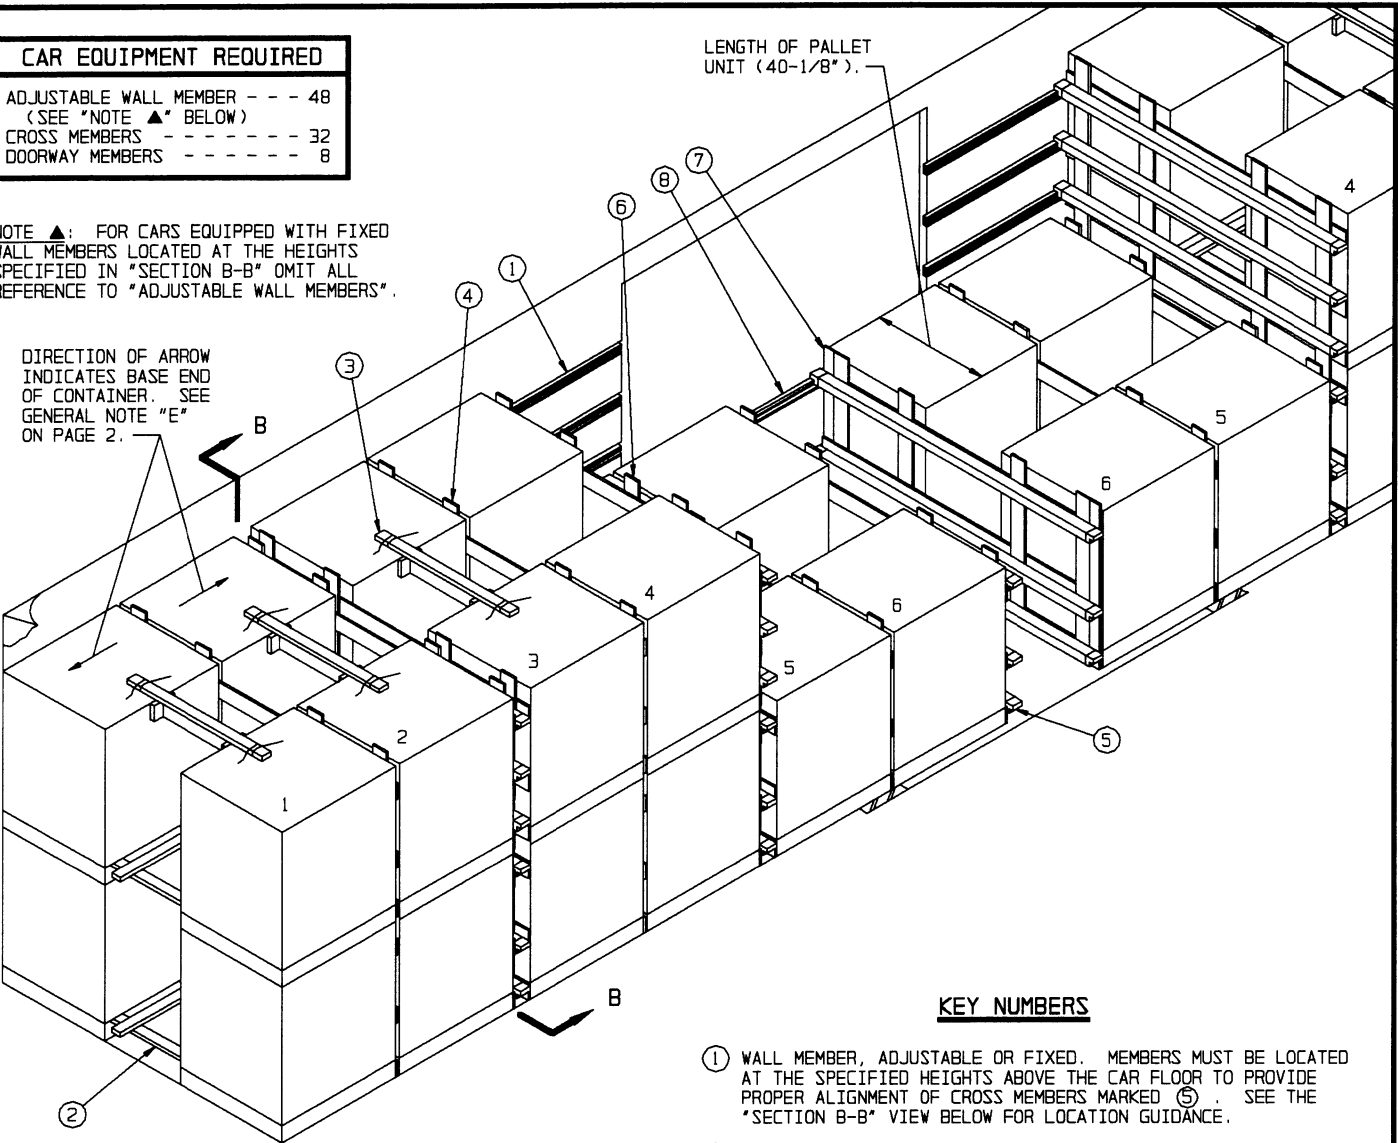

SEE GENERAL NOTES "D" AND "G" ON PAGE 2.

**ISOMETRIC VIEW**

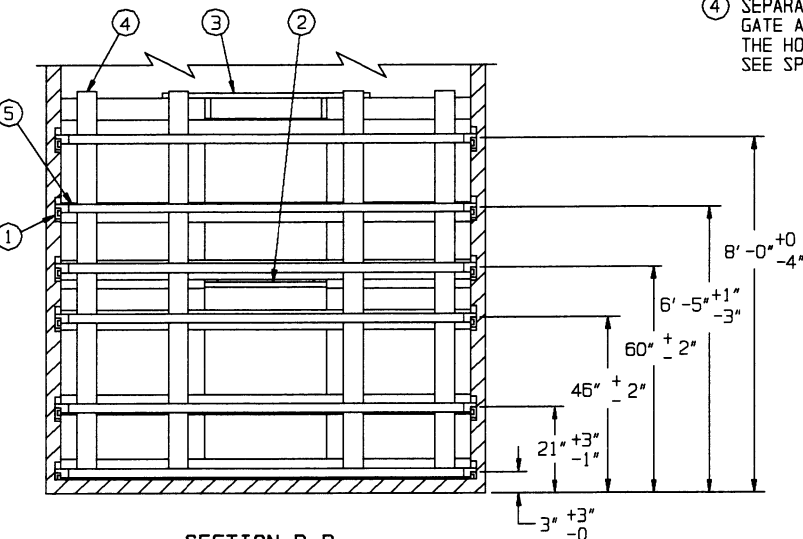

**SECTION B-B**

**KEY NUMBERS**

- ① WALL MEMBER, ADJUSTABLE OR FIXED. MEMBERS MUST BE LOCATED AT THE SPECIFIED HEIGHTS ABOVE THE CAR FLOOR TO PROVIDE PROPER ALIGNMENT OF CROSS MEMBERS MARKED ⑤. SEE THE "SECTION B-B" VIEW BELOW FOR LOCATION GUIDANCE.
- ② ANTI-SWAY BRACE (20 REQD). SEE THE DETAIL ON PAGE 12. INSTALL BETWEEN LATERALLY ADJACENT PALLET UNITS. SEE GENERAL NOTES "M" AND "N" ON PAGE 2.
- ③ TOP-OF-LOAD ANTI-SWAY BRACE (6 REQD). SEE THE DETAIL ON PAGE 12. WIRE TIE TO THE PALLET UNITIZING STRAPS WITH NO. 14 GAGE WIRE AS SHOWN BY THE "TIE WIRE APPLICATION" DETAIL ON PAGE 39. SEE SPECIAL NOTES 5 AND 7 ON PAGE 9.
- ④ SEPARATOR GATE FOR 2-HIGH (10 REQD). SEE THE "SEPARATOR GATE A" DETAIL ON PAGE 13. AS APPLICABLE, POSITION WITH THE HORIZONTAL PIECES AGAINST THE ALREADY LOADED UNITS. SEE SPECIAL NOTES 5, 7, AND 8 ON PAGE 9.

(KEY NUMBERS CONTINUED ON PAGE 9)



(KEY NUMBERS CONTINUED FROM PAGE 8)

- ⑤ CROSS MEMBER (30 REQD). SEE GENERAL NOTE "X" ON PAGE 3.
- ⑥ SEPARATOR GATE FOR 1-HIGH (6 REQD). SEE THE "SEPARATOR GATE A" DETAIL ON PAGE 13. POSITION WITH THE HORIZONTAL PIECES AGAINST THE UNITS. SEE SPECIAL NOTES 6 AND 7 ON THIS PAGE.
- ⑦ STOP PIECE, 1" X 4" X 60" (2 REQD). POSITION AS SHOWN IN THE LOAD ON PAGE 8. NAIL TO THE HORIZONTAL PIECES OF SEPARATOR GATE, PIECE MARKED ⑥, W/2-6d
- ⑧ DOORWAY MEMBER (6 REQD). SEE THE "SECTION B-B" VIEW ON PAGE 8 FOR LOCATION GUIDANCE. SEE SPECIAL NOTE 8 ON THIS PAGE.

SPECIAL NOTES:


1. A 50'-6" LONG BY 9'-0" WIDE (INSIDE CLEARANCE) WOOD-LINED BOX CAR EQUIPPED WITH ADJUSTABLE AND/OR FIXED WALL MEMBERS, AND WITH 10'-0" WIDE DOOR OPENINGS IS SHOWN. CARS OF OTHER DIMENSIONS AND CARS HAVING WIDER OR NARROWER DOOR OPENINGS CAN BE USED. SEE GENERAL NOTE "O" ON PAGE 2.
2. A MAXIMUM OF THIRTY OF THESE UNITS FOR AN APPROXIMATE LADING WEIGHT OF 73,320 POUNDS CAN BE PLACED IN A 40'-6" LONG CAR.
3. IF A CAR HAS BOWED ENDWALLS WHICH ARE BOWED OUTWARD TWO INCHES OR MORE EITHER FROM SIDE TO SIDE OR FROM FLOOR TO ROOF, CROSS MEMBERS CAN BE INSTALLED NEAR THE ENDWALL OF THE CAR TO PROVIDE A "SQUARED END" RATHER THAN INSTALLING DUNNAGE AS SPECIFIED IN GENERAL NOTE "G" ON PAGE 2. THESE CROSS MEMBERS SHOULD BE INSTALLED AT THE SAME HEIGHTS AS THE CROSS MEMBERS USED THROUGHOUT THE LOAD AS BLOCKING MEMBERS. A SEPARATOR GATE, SHOWN AS PIECE MARKED ④, MUST BE POSITIONED AGAINST THESE CROSS MEMBERS PRIOR TO LOADING.
4. TOP-OF-LOAD ANTI-SWAY BRACES, SHOWN AS PIECES MARKED ③ IN THE LOAD ON PAGE 8, MUST BE INSTALLED IN EACH END OF THE CAR. THREE BRACES ARE REQUIRED IN EACH END OF A LOAD REGARDLESS OF THE CAR LENGTH.
5. TO FACILITATE POSITIONING OF THE PALLET UNITS AS LOADING PROGRESSES, POSITION PALLET UNIT STACKS AGAINST THE ENDWALL, THEN POSITION A SEPARATOR GATE, SHOWN AS PIECE MARKED ④, SO THE HORIZONTAL PIECES ARE AGAINST THE PALLET UNITS. REPEAT THIS PROCEDURE FOR THE REMAINING STACKS.
6. SEPARATOR GATES IN THE DOORWAY AREA MUST BE PREVENTED FROM SHIFTING INTO A DOOR OPENING BY THE APPLICATION OF THE STOP PIECES, PIECES MARKED ⑦. IN CARS EQUIPPED WITH STAGGERED DOORS, STOP PIECES MAY BE REQUIRED ON UP TO FOUR SEPARATOR GATES.
7. SEPARATOR GATES MAY BE FORMED FROM 3/8" OR THICKER PLYWOOD IN LIEU OF DIMENSIONAL LUMBER, IF DESIRED. SEE THE "ALTERNATIVE SEPARATOR GATE A" DETAIL ON PAGE 13 FOR CONSTRUCTION GUIDANCE.
8. IF THE CAR BEING LOADED IS EQUIPPED WITH AT LEAST TWELVE DOORWAY MEMBERS, AN ADDITIONAL EIGHT PALLET UNITS CAN BE LOADED IN THE DOORWAY AREA.
9. THE DEPICTED LOAD CAN BE REDUCED TO SUIT THE QUANTITY TO BE SHIPPED. A LOAD MAY BE REDUCED BY MULTIPLES OF TWO PALLET UNITS BY OMITTING LATERALLY ADJACENT UNITS FROM THE TOP LAYER OF ONE OR MORE LOAD UNITS OR BY MULTIPLES OF FOUR PALLET UNITS BY OMITTING ONE OR MORE ENTIRE LOAD UNITS. TO REDUCE A LOAD BY ONE PALLET UNIT, REFER TO THE LCL PROCEDURES ON PAGE 18 FOR GUIDANCE.
10. PALLET UNITS WHICH DO NOT CONTAIN A FULL QUANTITY OF ITEMS CAN BE TRANSPORTED, REFER TO U. S. ARMY AMC DRAWING 19-48-4231/48-20PM1006 FOR LESS THAN FULL PALLET UNITS. FOR "SHIPMENT OF LEFTOVER CONTAINERS", SEE THE DETAILS AND SPECIAL NOTES ON PAGE 35.

BILL OF MATERIAL		
LUMBER	LINEAR FEET	BOARD FEET
1" X 4"	10	4
1" X 6"	1,193	597
2" X 4"	297	199
2" X 6"	22	22
NAILS	NO. REQD	POUNDS
6d (2")	950	5-1/2
10d (3")	312	5
12d (3-1/4")	72	1-1/4
WIRE, NO. 14 GAGE	24' REQD	NIL

LOAD AS SHOWN

ITEM	QUANTITY	WEIGHT (APPROX)
PALLET UNIT	40	97,760 LBS
DUNNAGE		1,656 LBS
<b>TOTAL WEIGHT</b>		<b>99,416 LBS (APPROX)</b>

DIRECTION OF ARROW INDICATES  
BASE END OF CONTAINER. SEE  
GENERAL NOTE "E" ON PAGE 2.

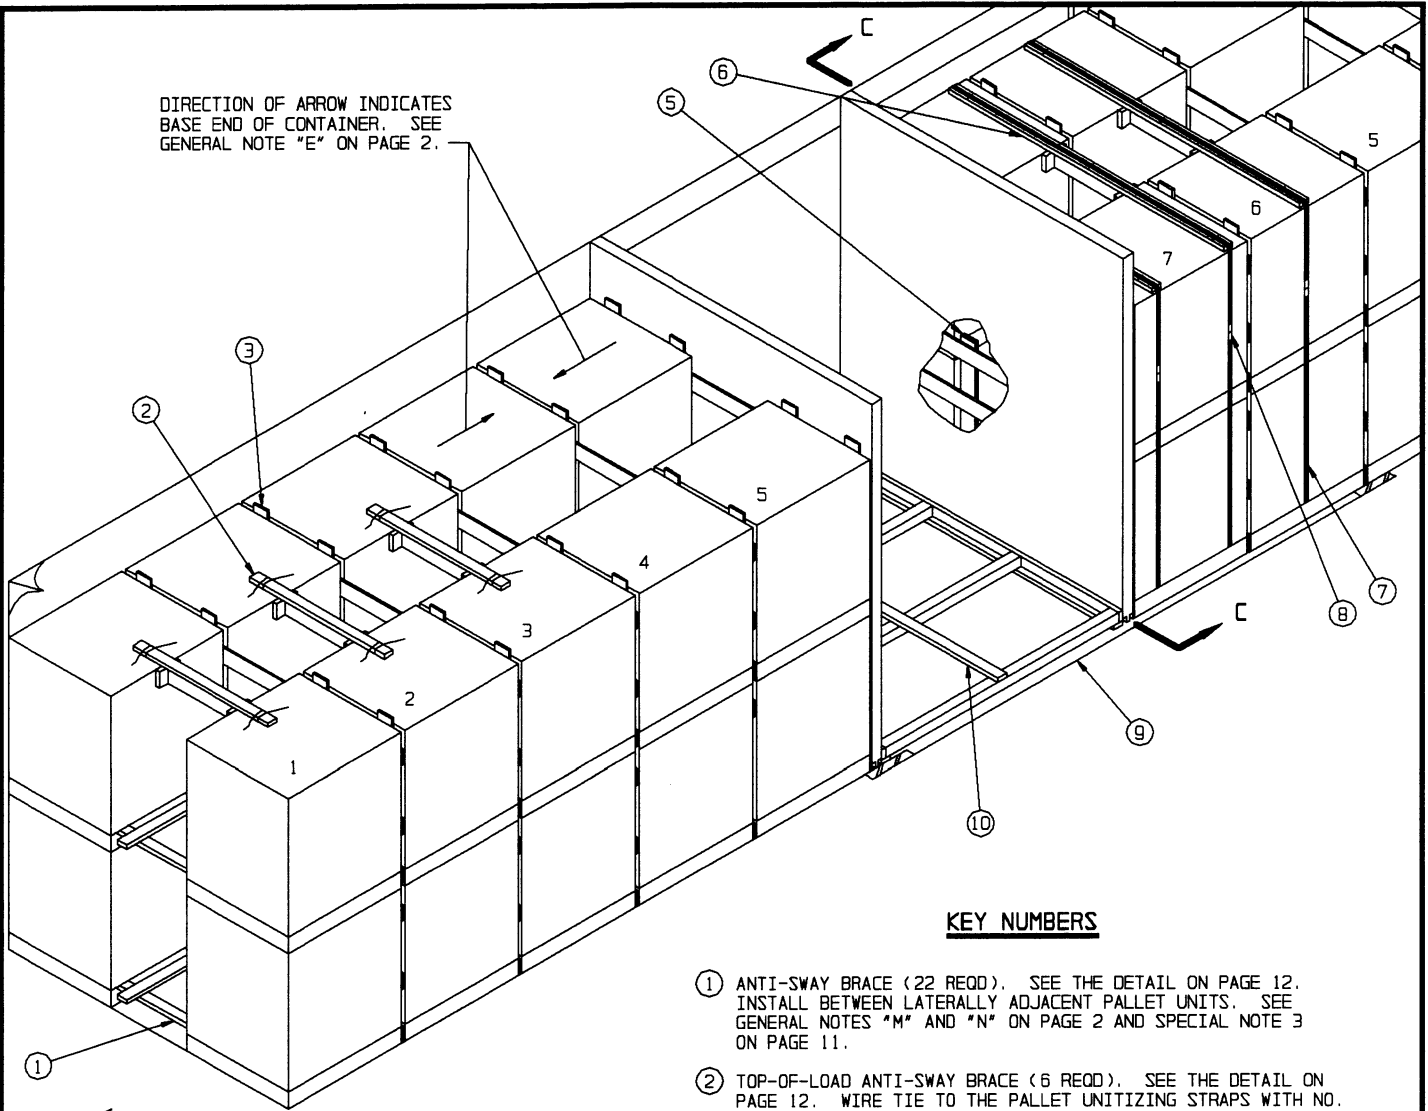


**KEY NUMBERS**

- ① ANTI-SWAY BRACE (22 REQD). SEE THE DETAIL ON PAGE 12. INSTALL BETWEEN LATERALLY ADJACENT PALLET UNITS. SEE GENERAL NOTES "M" AND "N" ON PAGE 2 AND SPECIAL NOTE 3 ON PAGE 11.
- ② TOP-OF-LOAD ANTI-SWAY BRACE (6 REQD). SEE THE DETAIL ON PAGE 12. WIRE TIE TO THE PALLET UNITIZING STRAPS WITH NO. 14 GAGE WIRE AS SHOWN BY THE "TIE WIRE APPLICATION" DETAIL ON PAGE 39. SEE SPECIAL NOTE 4 ON PAGE 11.
- ③ SEPARATOR GATE (12 REQD). SEE THE "SEPARATOR GATE A" DETAIL ON PAGE 13. POSITION WITH THE HORIZONTAL PIECES AGAINST THE ALREADY LOADED UNITS. SEE SPECIAL NOTES 5 AND 7 ON PAGE 11.
- ④ FLOORLINE BLOCKING, 2" X 6" X 44" (DOUBLED) (4 REQD). POSITION AGAINST PALLETS IN THE DOORWAY AREA AS SHOWN IN THE "SECTION C-C" VIEW BELOW. NAIL THE FIRST PIECE TO THE CAR FLOOR W/5-16d NAILS. NAIL THE SECOND PIECE TO THE FIRST IN A LIKE MANNER. OMIT ANTI-SWAY BRACES AT FLOOR LEVEL. SEE SPECIAL NOTE 3 ON PAGE 11.
- ⑤ STOP PIECE, 1" X 4" X 48" (DOUBLED) (4 REQD). INSTALL ON THE SIDE OPPOSITE THE VERTICAL PIECES OF THE SEPARATOR GATE, PIECE MARKED ③, WHICH IS IN THE DOORWAY AREA. POSITION IN CONTACT WITH THE ADJACENT PALLET UNITS AND NAIL THE FIRST PIECE TO THE HORIZONTAL PIECES W/3-6d NAILS AT EACH JOINT AND CLINCH. NAIL THE SECOND PIECE TO THE FIRST W/6-6d NAILS. SEE SPECIAL NOTE 6 ON PAGE 11.
- ⑥ SPACER ASSEMBLY (3 REQD). SEE THE "SPACER ASSEMBLY B" DETAIL ON PAGE 17.
- ⑦ DOORWAY PROTECTION STRAP, 1-1/4" X .035" OR .031" X 37"-6" LONG STEEL STRAPPING (3 REQD). ENCIRCLE THE PALLET UNITS IN THE DOORWAY AREA AS SHOWN IN THE ISOMETRIC VIEW. STAPLE STRAP TO PIECE MARKED ⑥ W/3 STAPLES. SEE SPECIAL NOTE 8 ON PAGE 11.
- ⑧ SEAL FOR 1-1/4" STEEL STRAPPING (6 REQD, 2 PER STRAP). CRIMP EACH SEAL WITH TWO PAIR OF NOTCHES. SEE GENERAL NOTE "O" ON PAGE 2.

SEE GENERAL NOTES  
"D" AND "G" ON  
PAGE 2.

**ISOMETRIC VIEW**

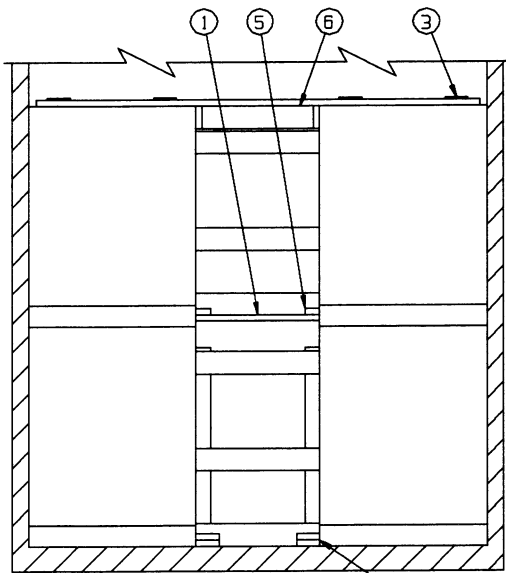

**SECTION C-C**

STRAPPING OMITTED FOR CLARITY

(CONTINUED ON PAGE 11)

(KEY NUMBERS CONTINUED FROM PAGE 10)

- ⑨ STRUT ASSEMBLY (1 REQD). SEE THE "STRUT ASSEMBLY FOR 1-PIECE BULKHEADS" DETAIL ON PAGE 43. INSTALL BETWEEN THE LOAD DIVIDER BULKHEADS. SEE SPECIAL NOTE 9 BELOW.
- ⑩ STRUT BRACING, 2" X 4" BY LOAD DIVIDER WIDTH (1 REQD FOR EVERY 48" OF STRUT LENGTH). NAIL TO THE STRUTS W/3-10d NAILS AT EACH JOINT.

(SPECIAL NOTES CONTINUED)

- 9. THE STRUT ASSEMBLY, SHOWN AS PIECE MARKED ⑨ IN THE LOAD ON PAGE 10, IS REQUIRED WHEN THE LOAD IN EITHER END OF THE CAR IS 50,000 POUNDS OR MORE. A STRUT ASSEMBLY WILL BE REQUIRED IF ONE END OF THE LOAD CONTAINS MORE THAN FIVE LOAD UNITS.
- 10. THE DEPICTED LOAD CAN BE REDUCED TO SUIT THE QUANTITY TO BE SHIPPED. A 2-TIER LOAD MAY BE REDUCED BY MULTIPLES OF FOUR PALLET UNITS OR A 1-TIER LOAD CAN BE REDUCED BY A MULTIPLE OF TWO UNITS BY OMITTING ONE OR MORE LOAD UNITS FROM THE CENTER PORTION OF THE LOAD. OR, THE ENTIRE TOP TIER CAN BE OMITTED. FOR OTHER METHODS OF REDUCING A LOAD AND FOR TYPICAL "LCL" PROCEDURES, REFER TO PAGES 19 THRU 34 AND GENERAL NOTE "FF" ON PAGE 4 FOR GUIDANCE.
- 11. PALLET UNITS WHICH DO NOT CONTAIN A FULL QUANTITY OF ITEMS CAN BE TRANSPORTED, REFER TO U. S. ARMY AMC DRAWING 19-48-4231/48-20PM1006 FOR LESS THAN FULL PALLET UNITS. FOR "SHIPMENT OF LEFTOVER CONTAINERS", SEE THE DETAILS AND SPECIAL NOTES ON PAGE 35.

SPECIAL NOTES:


- 1. A 50'-6" LONG BY 9'-2" WIDE WOOD-LINED CUSHIONED BOX CAR EQUIPPED WITH LOAD DIVIDER BULKHEADS AND WITH 10'-0" WIDE DOOR OPENINGS IS SHOWN. CARS OF OTHER DIMENSIONS AND CARS HAVING WIDER OR NARROWER DOOR OPENINGS CAN BE USED. SEE GENERAL NOTES "AA" AND "EE" ON PAGE 4.
- 2. A MAXIMUM OF SIXTY UNITS FOR AN APPROXIMATE LADING WEIGHT OF 146,640 POUNDS CAN BE PLACED IN A 60'-8" LONG CAR WHEN USING THE DEPICTED PROCEDURES; FORTY UNITS, FOR AN APPROXIMATE LADING WEIGHT OF 97,760 POUNDS, CAN BE LOADED IN A 40'-6" LONG CAR.
- 3. IF THE WOODEN GATE TYPE DOORWAY PROTECTION, PIECE MARKED ⑦ ON PAGE 6, IS USED IN LIEU OF THE NAILED FLOORLINE BLOCKING AND DOORWAY PROTECTION STRAP PROCEDURES, THE LOWER ANTI-SWAY BRACES IN THE DOORWAY AREA MAY BE USED.
- 4. TOP-OF-LOAD ANTI-SWAY BRACES, SHOWN AS PIECES MARKED ② IN THE LOAD ON PAGE 10, MUST BE INSTALLED IN EACH END OF THE CAR. THREE BRACES ARE REQUIRED IN EACH END OF A 50'-6" OR 40'-6" LONG CAR, FOUR BRACES ARE REQUIRED IN EACH END OF A 60'-8" LONG CAR.
- 5. TO FACILITATE POSITIONING OF THE PALLET UNITS AS LOADING PROGRESSES, POSITION PALLET UNIT STACKS AGAINST THE ENDWALL, THEN POSITION A SEPARATOR GATE, SHOWN AS PIECE MARKED ③, SO THE HORIZONTAL PIECES ARE AGAINST THE PALLET UNITS. REPEAT THIS PROCEDURE FOR THE REMAINING STACKS.
- 6. SEPARATOR GATES IN THE DOORWAY AREA OF A CAR EQUIPPED WITH CONVENTIONAL SLIDING DOORS MUST BE PREVENTED FROM SHIFTING INTO A DOOR OPENING BY THE APPLICATION OF THE STOP PIECES, PIECES MARKED ⑤. IN CARS EQUIPPED WITH STAGGERED DOORS, STOP PIECES MAY BE REQUIRED ON UP TO SIX SEPARATOR GATES.
- 7. SEPARATOR GATES MAY BE FORMED FROM 3/8" OR THICKER PLYWOOD IN LIEU OF DIMENSIONAL LUMBER, IF DESIRED. SEE THE "ALTERNATIVE SEPARATOR GATE A" DETAIL ON PAGE 13 FOR CONSTRUCTION GUIDANCE.
- 8. DOORWAY PROTECTION IS REQUIRED FOR ALL PALLET UNIT STACKS WHICH ARE COMPLETELY WITHIN THE DOORWAY AREA OR WHICH EXTEND INTO THE DOORWAY AREA BY ONE-HALF OR MORE OF THE STACK WIDTH. THE WOODEN GATE TYPE OF DOORWAY PROTECTION, SHOWN AS PIECES MARKED ⑦ IN THE LOAD ON PAGE 6, IS APPLICABLE FOR BOX CARS EQUIPPED WITH CONVENTIONAL SLIDING DOORS AND NAILABLE DOOR POSTS. REFER TO PAGES 40 AND 41 FOR ALTERNATIVE DOORWAY PROTECTION FOR CARS EQUIPPED WITH CONVENTION SLIDING DOORS. IF THE CAR BEING LOADED IS EQUIPPED WITH PLUG TYPE DOORS OR COMBINATION PLUG AND SLIDING DOORS, NAILED FLOORLINE BLOCKING AND AND DOORWAY PROTECTION STRAPS MUST BE USED. TWO STRAPS ARE REQUIRED FOR EACH LOAD UNIT WHICH IS COMPLETELY WITHIN THE DOORWAY AREA OR WHICH IS NOT RESTRAINED BY AT LEAST SIX INCHES OF THE CAR SIDEWALL ON BOTH SIDES OF THE CAR. ONE STRAP IS REQUIRED FOR EACH LOAD UNIT WHICH IS RETAINED BY FROM 6" TO ONE-HALF THE LOAD UNIT WIDTH. NOTE THAT NAILED FLOORLINE BLOCKING AND DOORWAY PROTECTION STRAPS MAY ALSO BE USED IN CARS EQUIPPED WITH SLIDING DOORS.

(CONTINUED AT LEFT)

BILL OF MATERIAL		
LUMBER	LINEAR FEET	BOARD FEET
1" X 4"	32	11
1" X 6"	1089	545
1" X 8"	17	12
2" X 4"	407	272
2" X 6"	62	62
4" X 4"	16	22
NAILS	NO. REQD	POUNDS
6d (2")	931	5-1/2
10d (3")	370	5-3/4
12d (3-1/4")	108	1-3/4
16d (3-1/2")	56	1-1/4
STEEL STRAPPING, 1-1/4" -- 113' REQD ----- 16 LBS		
SEAL FOR 1-1/4" STRAPPING -- 6 REQD ----- NIL		
WIRE, NO. 14 GAGE -- 24' REQD ----- NIL		
STAPLE, 15/16" X 3/4" -- 9 REQD ----- NIL		


LOAD AS SHOWN

ITEM	QUANTITY	WEIGHT (APPROX)
PALLET UNIT	48	117,312 LBS
DUNNAGE		1,879 LBS
TOTAL WEIGHT		119,191 LBS (APPROX)

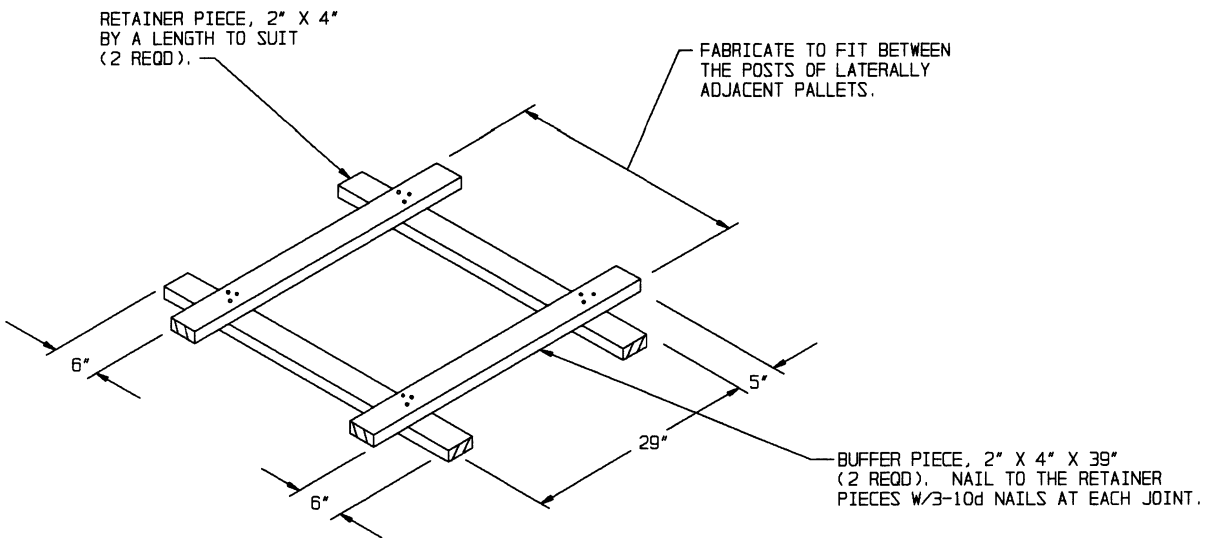


**ANTI-SWAY BRACE**

IF DESIRED, THE ANTI-SWAY BRACE CAN BE PARTIALLY PRE-ASSEMBLED; ONE BUFFER PIECE CAN BE NAILED TO BOTH RETAINER PIECES. THE LONG ENDS OF THE ASSEMBLY CAN THEN BE INSTALLED INTO THE FORKLIFT OPENING OF A LOADED PALLET PRIOR TO POSITIONING THE LATERALLY ADJACENT PALLET UNIT.

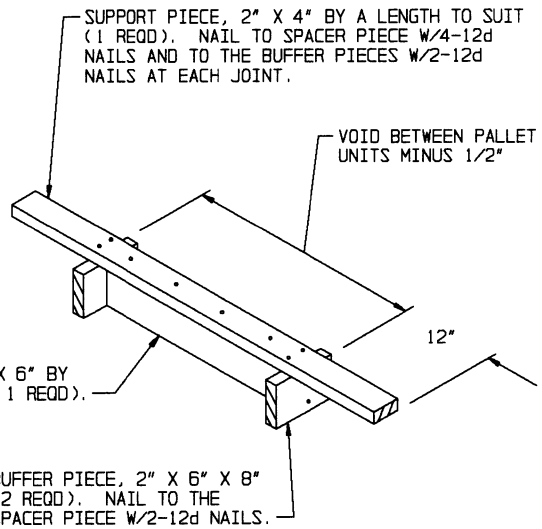


HORIZONTAL PIECE, 1" X 6" BY DOOR OPENING WIDTH (4 REQD). NAIL TO THE VERTICAL PIECES W/3-6d NAILS AT EACH END.

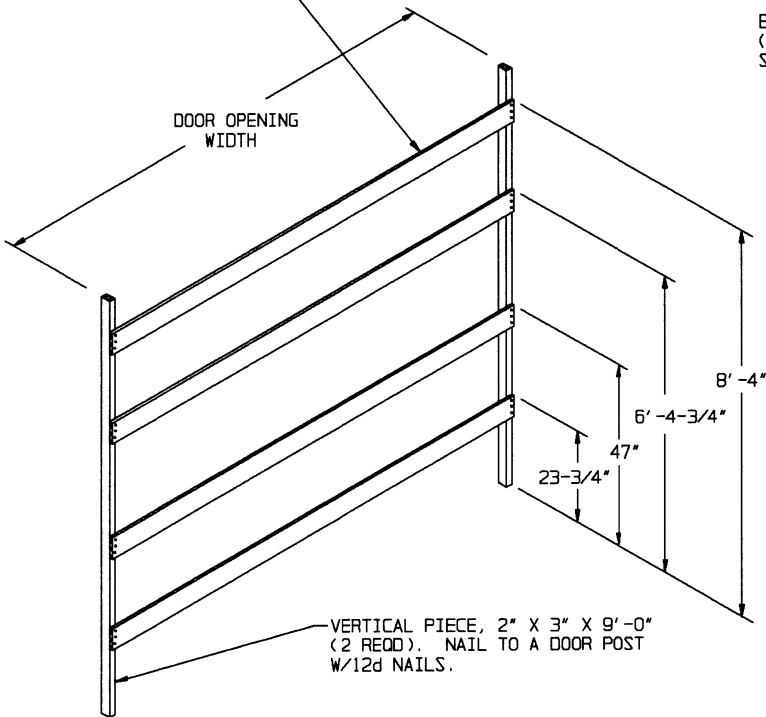


**DOORWAY PROTECTION**

**TOP-OF-LOAD ANTI-SWAY BRACE**

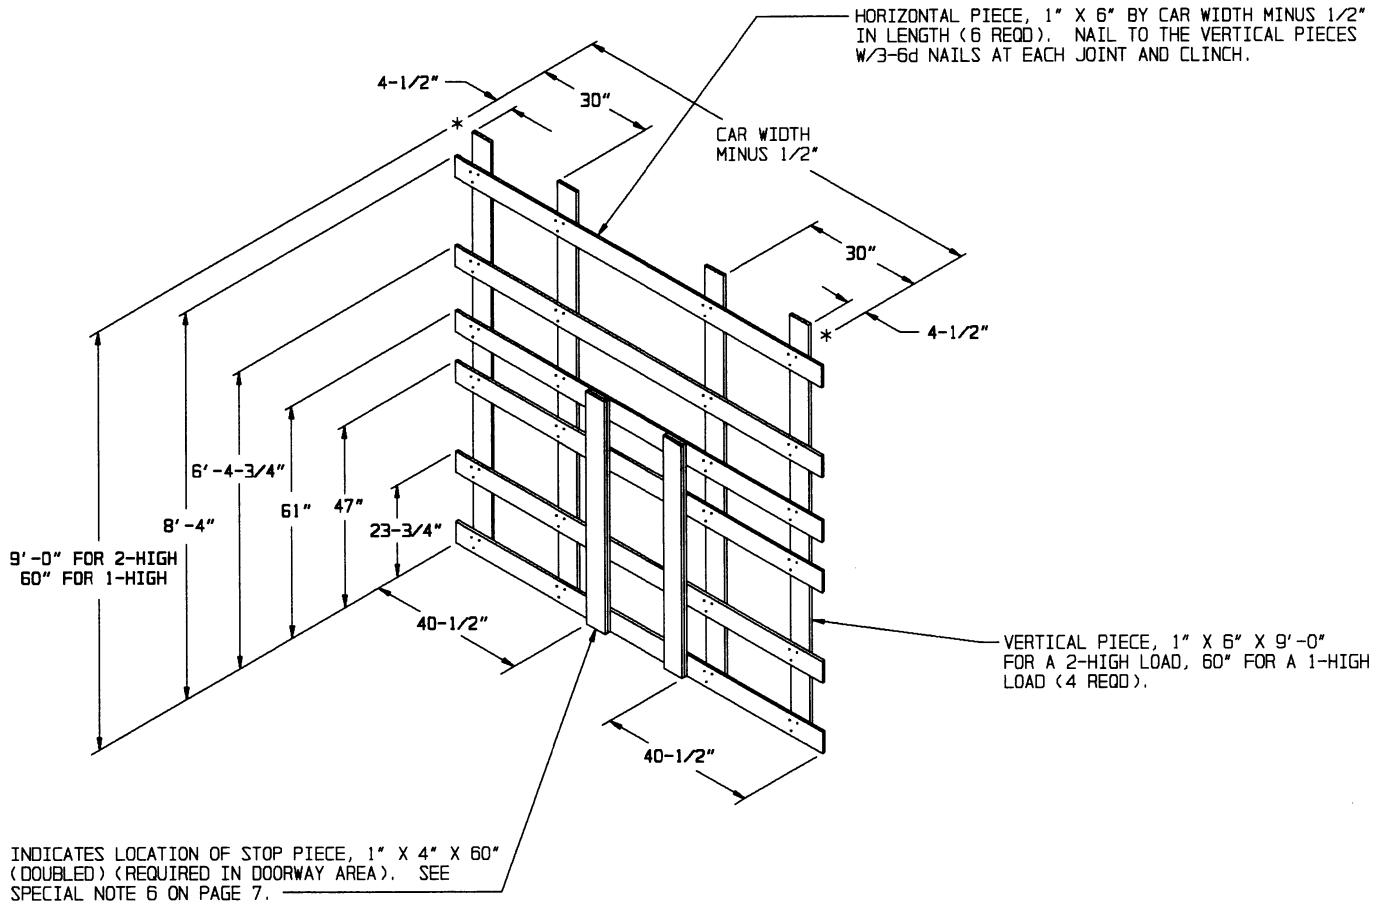

**SEPARATOR GATE A**


SEE SPECIAL NOTE 8 ON PAGE 7.

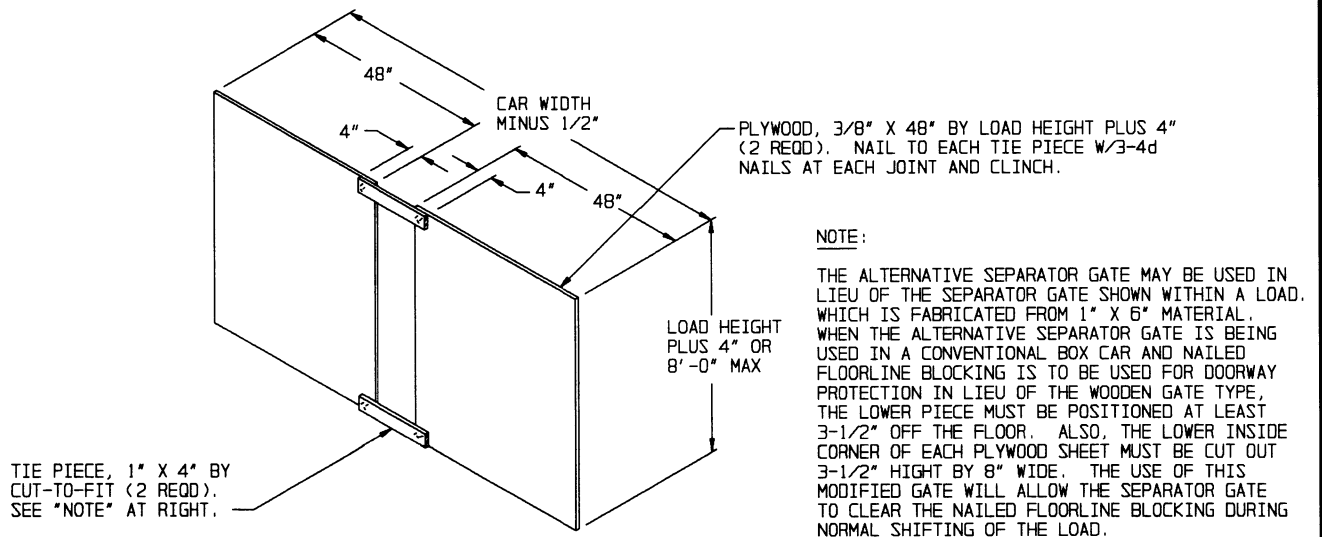


**ALTERNATIVE SEPARATOR GATE A**

SEE SPECIAL NOTE 7 ON PAGE 7.

**DETAILS**

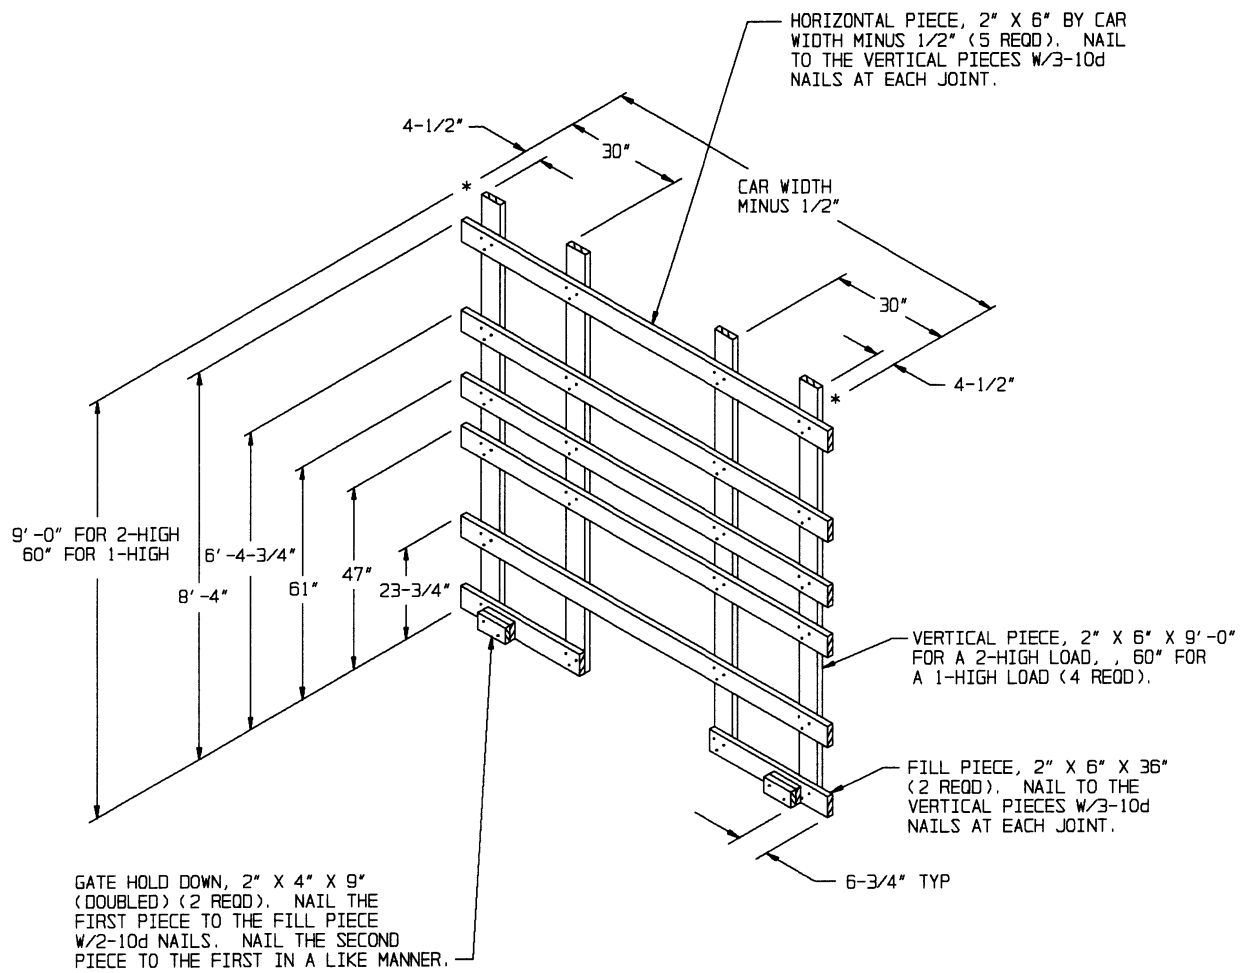

**CENTER GATE A**

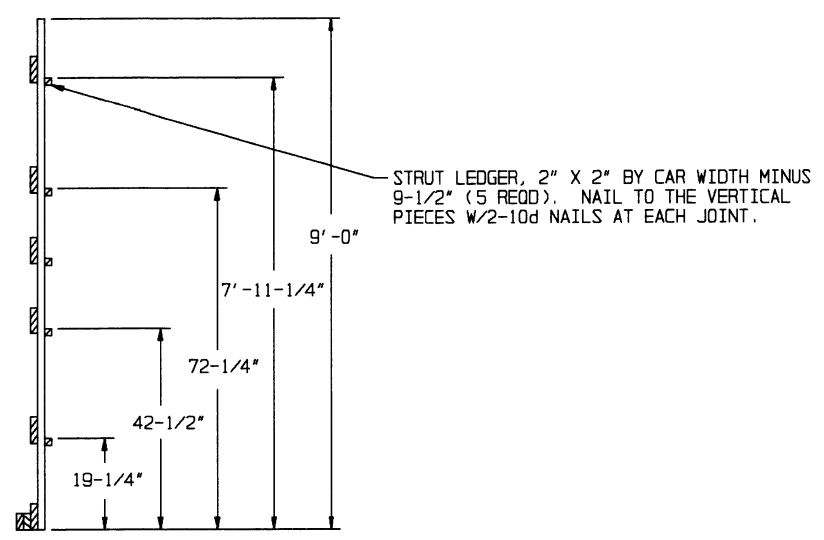

**END VIEW**

**DETAILS**

SUPPORT PIECE, 2" X 4" X 53"  
(2 REQD). NAIL TO THE LATERAL  
PIECES W/1-10d NAIL AT EACH END  
AND TO THE LONGITUDINAL PIECE  
W/5-10d NAILS.


SPACER, 2" X 6" X 43" (1 REQD).

FABRICATE TO FIT

LATERAL PIECE, 2" X 6" BY A LENGTH  
TO SUIT (2 REQD). NAIL TO THE  
SPACER PIECE W/3-12d NAILS.


LONGITUDINAL PIECE, 2" X 6" X 46"  
(2 REQD). NAIL TO THE LATERAL  
PIECES W/3-12d NAILS AT EACH END.

**SPACER ASSEMBLY A**

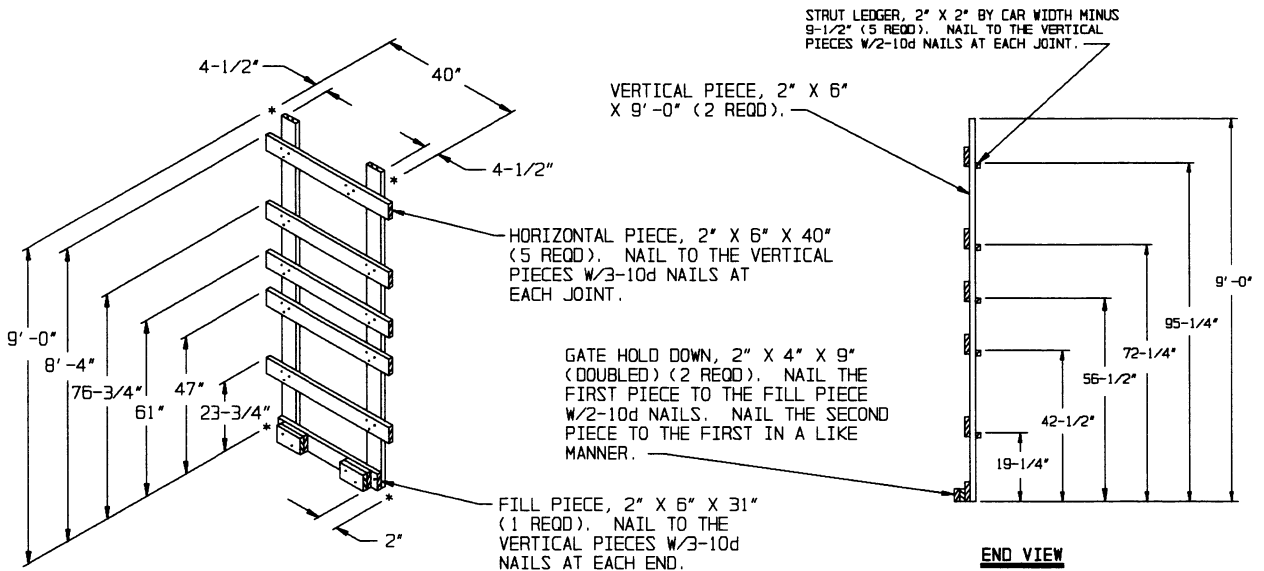

**CENTER GATE B**

**DETAILS**

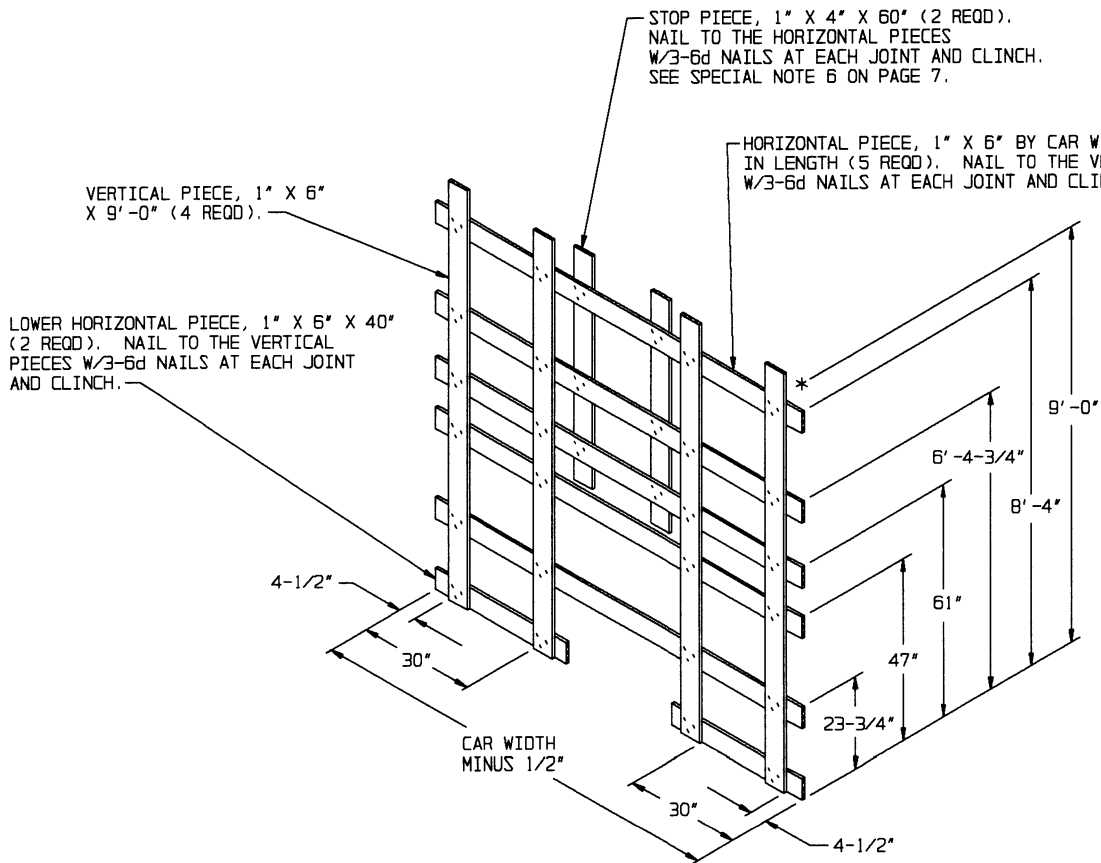


**SEPARATOR GATE B**

THIS SEPARATOR GATE IS FOR USE IN THE DOORWAY AREA OF A 2-HIGH LOAD WHEN NAILED FLOORLINE BLOCKING IS USED FOR DOORWAY PROTECTION. SEE SPECIAL NOTE 8 ON PAGE 7.

HORIZONTAL PIECE, 1" X 6" BY CAR WIDTH MINUS 1/2" IN LENGTH (2 REOD). NAIL TO THE VERTICAL PIECES W/3-6d NAILS AT EACH JOINT AND CLINCH.

VERTICAL PIECE, 1" X 6" X 60" (4 REOD).


STOP PIECE, 1" X 4" X 48" (2 REOD). NAIL TO THE HORIZONTAL PIECES W/3-6d NAILS AT EACH JOINT AND CLINCH. SEE SPECIAL NOTE 6 ON PAGE 7.

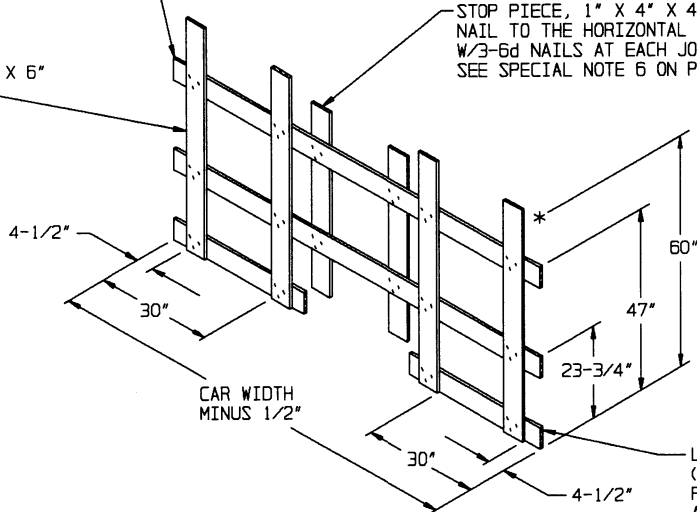

**SEPARATOR GATE C**


THIS SEPARATOR GATE IS FOR USE IN THE DOORWAY AREA OF A 1-HIGH LOAD WHEN NAILED FLOORLINE BLOCKING IS USED FOR DOORWAY PROTECTION.



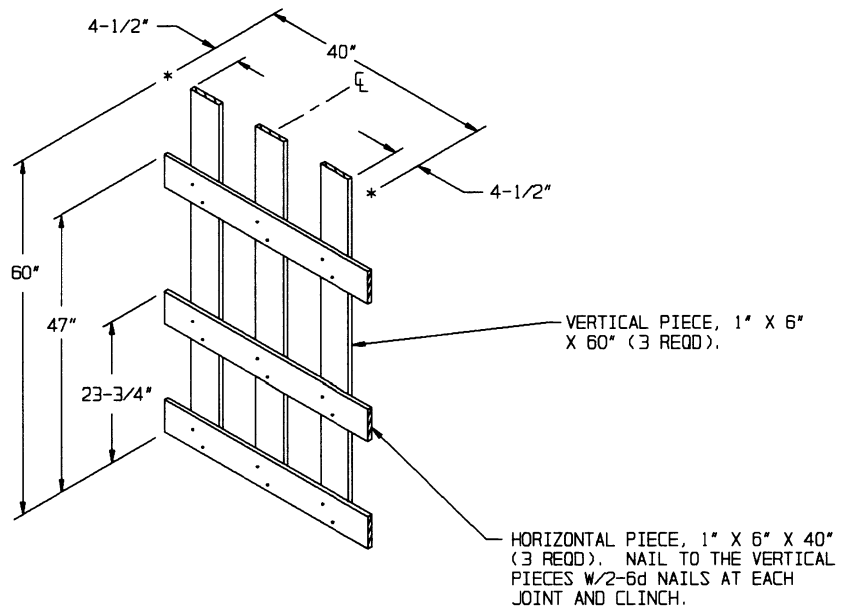

**SEPARATOR GATE D**


THIS GATE IS TO BE USED WITH THE 1-WIDE LOAD ON PAGE 32.

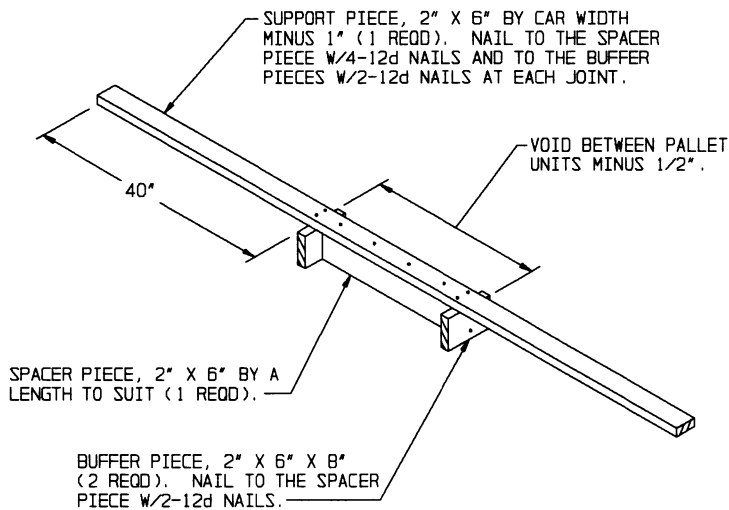

**SPACER ASSEMBLY B**

THIS ASSEMBLY IS FOR USE IN THE LOAD ON PAGE 10.

DIRECTION OF ARROW INDICATES  
BASE END OF CONTAINERS. SEE  
GENERAL NOTE "E" ON PAGE 2.

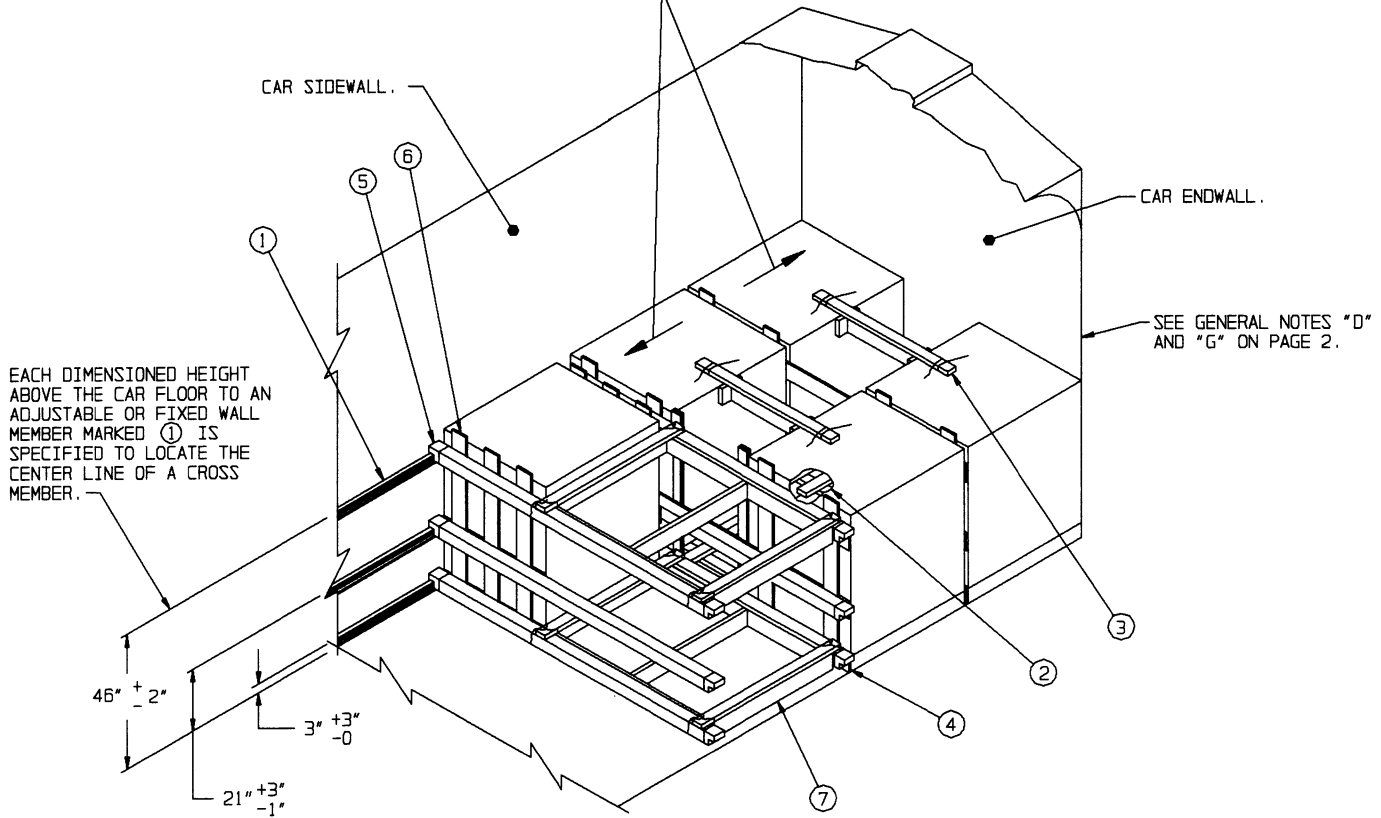

**ISOMETRIC VIEW**


**KEY NUMBERS**

**SPECIAL NOTES:**

1. A 9'-0" WIDE (INSIDE CLEARANCE) WOOD-LINED BOX CAR EQUIPPED WITH ADJUSTABLE AND/OR FIXED WALL MEMBERS IS SHOWN. CARS OF OTHER WIDTHS CAN BE USED.
2. FIVE UNITS ARE SHOWN AS A TYPICAL LOAD QUANTITY. THE NUMBER OF UNITS CAN BE ADJUSTED TO SUIT THE QUANTITY TO BE SHIPPED.
3. TOP-OF-LOAD ANTI-SWAY BRACES, SHOWN AS PIECES MARKED ③, MUST BE INSTALLED IN EACH END OF THE CAR AND WIRE TIED TO PALLET UNITIZING STRAPS WITH NO. 14 GAGE WIRE. BRACES ARE REQUIRED BETWEEN THE FIRST LATERALLY ADJACENT PALLET UNITS IN EACH END OF A LOAD REGARDLESS OF THE LOAD LENGTH.
4. SEPARATOR GATES MAY BE FORMED FROM 3/8" OR THICKER PLYWOOD IN LIEU OF DIMENSIONAL LUMBER, IF DESIRED. CONSTRUCT EACH GATE TO BE CAR WIDTH MINUS 1/2" IN LENGTH BY 48" HIGH OR UNIT LENGTH IN WIDTH BY 48" HIGH, AS APPLICABLE.
5. THE SPACER ASSEMBLIES, SHOWN AS PIECES MARKED ⑦, MAY ALSO BE USED IN AN UPPER LAYER OF A LOAD FOR THE OMISSION OF A PALLET UNIT. IF THE ASSEMBLIES ARE USED NEXT TO THE SECOND LAYER AND THE ENDWALL IS WOOD-LINED, CUT THE ADJACENT ENDS OFF THE SUPPORT PIECES FLUSH WITH THE LATERAL PIECE. EACH ASSEMBLY CAN THEN BE SUPPORTED BY NAILING THE LATERAL PIECE TO THE CAR END WALL W/6-10d NAILS. IF THE ENDWALL IS NON-NAILABLE, CROSS MEMBERS MUST BE INSTALLED AT THE END OF THE LOAD TO SUPPORT THE SPACER ASSEMBLIES.

- ① WALL MEMBER, ADJUSTABLE OR FIXED. MEMBERS MUST BE LOCATED AT THE SPECIFIED HEIGHTS ABOVE THE CAR FLOOR TO PROVIDE PROPER ALIGNMENT OF CROSS MEMBERS MARKED ⑤.
- ② ANTI-SWAY BRACE (2 REQD). SEE THE DETAIL ON PAGE 12. INSTALL BETWEEN LATERALLY ADJACENT PALLET UNITS. SEE GENERAL NOTES "M" AND "N" ON PAGE 2.
- ③ TOP-OF-LOAD ANTI-SWAY BRACE (2 REQD). SEE THE DETAIL ON PAGE 12. WIRE TIE TO THE PALLET UNIT TIEDOWN STRAPS WITH NO. 14 GAGE WIRE AS SHOWN BY THE "TIE WIRE APPLICATION" DETAIL ON PAGE 39. SEE SPECIAL NOTE 3 AT LEFT.
- ④ SEPARATOR GATE FOR 1-HIGH BY 2-WIDE (2 REQD). SEE THE "SEPARATOR GATE A" DETAIL ON PAGE 13. POSITION WITH THE HORIZONTAL PIECES AGAINST THE ALREADY LOADED UNITS. SEE SPECIAL NOTE 4 AT LEFT.
- ⑤ CROSS MEMBER (5 REQD). SEE GENERAL NOTE "X" ON PAGE 3.
- ⑥ SEPARATOR GATE FOR 1-HIGH BY 1-WIDE (2 REQD). SEE THE "SEPARATOR GATE D" DETAIL ON PAGE 17.
- ⑦ SPACER ASSEMBLY (2 REQD). SEE THE "SPACER ASSEMBLY A" DETAIL ON PAGE 15 AND SPECIAL NOTE 5 AT LEFT. WIRE TIE TO CROSS MEMBER W/2 WRAPS OF NO. 14 GAGE WIRE AT EACH CORNER.

TYPICAL LCL (5-UNIT LOAD) IN A BOX CAR EQUIPPED WITH  
MECHANICAL BRACING DEVICES HAVING ADJUSTABLE AND/OR FIXED WALL MEMBERS

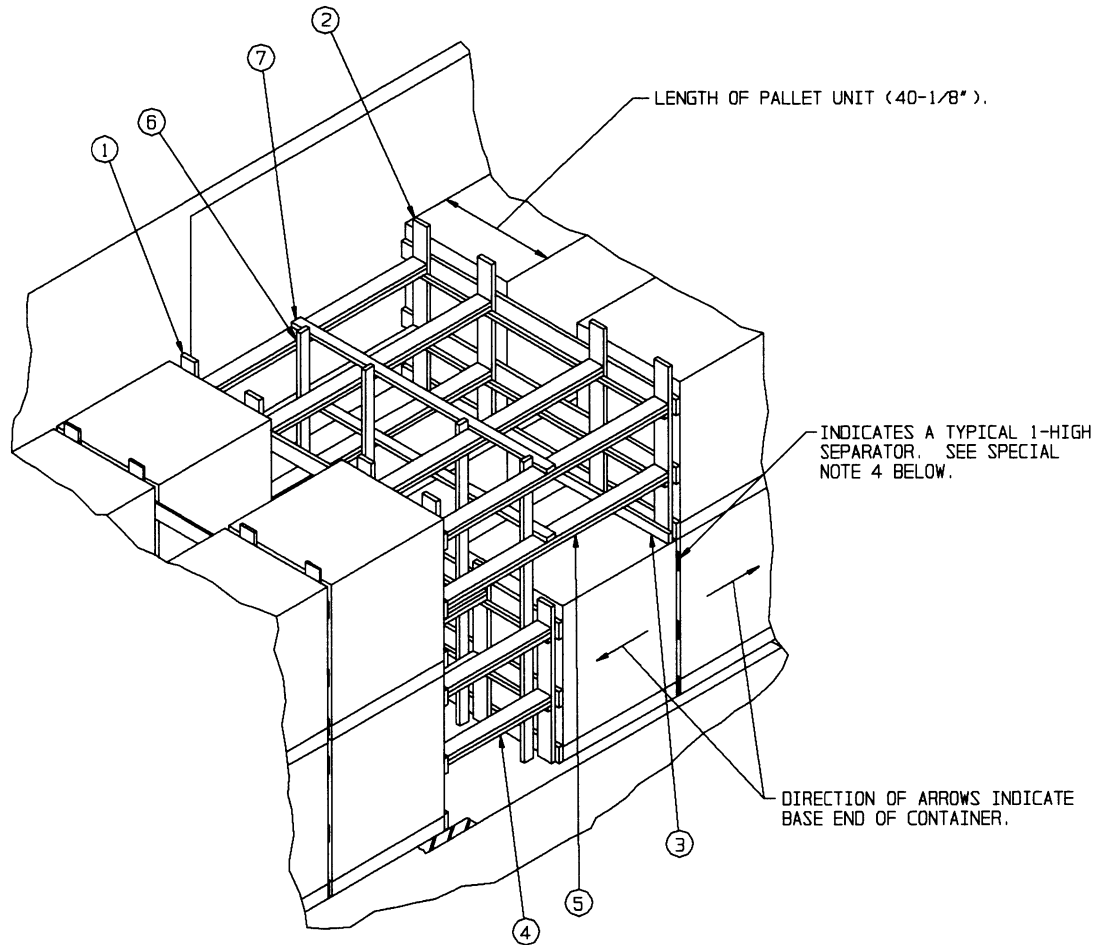


**ISOMETRIC VIEW**

**KEY NUMBERS**

**SPECIAL NOTES:**

1. ONLY THE CENTER PORTION OF A 9'-2" WIDE CONVENTIONAL TYPE BOX CAR IS SHOWN TO PORTRAY THE STRUTTED GATE METHOD OF PARTIAL-LAYER BRACING. CARS OF OTHER WIDTHS CAN ALSO BE USED.
2. THE PROCEDURES FOR THE ADJUSTMENT OF A LOAD QUANTITY BY THE OMISSION OF THE TOP LAYER FROM ONE LOAD UNIT IS SHOWN AS TYPICAL. THE PRINCIPLES MAY ALSO BE APPLIED FOR THE OMISSION OF THE TOP LAYER FROM TWO LOAD UNITS. IF THE STRUTS ARE OVER 8'-0" LONG, IT WILL BE NECESSARY TO ADD ANOTHER SET OF VERTICAL AND HORIZONTAL STRUT BRACING PIECES. NOTE THAT A 2" X 4" BY CAR WIDTH MINUS 1/2" IN LENGTH PAD MUST BE POSITIONED FLAT UNDER THE VERTICAL BRACING TO PREVENT THE VERTICAL BRACING FROM PUNCTURING A CONTAINER. SECURE BY TOENAILING EACH VERTICAL BRACING PIECE TO THE PAD W/1-10d NAIL.
3. ONLY THE BLOCKING AND BRACING PIECES WHICH ARE NECESSARY TO PERMIT THE OMISSION OF THE UNITS FROM THE TOP LAYER ARE SHOWN. REFER TO PAGE 6 FOR LATERAL BRACING AND DOORWAY PROTECTION REQUIREMENTS.
4. WHEN SEPARATOR GATES ARE POSITIONED BENEATH THE CENTER GATE, PIECE MARKED ②, THEY MUST BE 53" HIGH IN LIEU OF THE HEIGHT SHOWN IN THE "SEPARATOR GATE A" DETAIL ON PAGE 13.

- ① CENTER GATE FOR 2-HIGH (1 REQD). SEE THE "CENTER GATE A" DETAIL ON PAGE 14. SEE GENERAL NOTES "M" AND "N" ON PAGE 2.
- ② CENTER GATE FOR 1-HIGH (2 REQD). SEE THE "CENTER GATE A" DETAIL ON PAGE 14.
- ③ SUPPORT PIECE, 2" X 4" BY CAR WIDTH MINUS 1/2" IN LENGTH (1 REQD). NAIL TO THE VERTICAL PIECES OF THE TOP-LAYER GATE W/3-10d NAILS AT EACH JOINT.
- ④ STRUT, 2" X 6" BY CUT TO FIT (DOUBLED) (8 REQD). LAMINATE W/1-10d NAIL EVERY 6". POSITION BETWEEN CENTER GATES, PIECES MARKED ① AND ② IN THE FIRST LAYER AND TOENAIL THE TOP PIECE W/2-16d NAILS AT EACH END. SEE GENERAL NOTES "T" AND "U" ON PAGE 3.
- ⑤ STRUT, 2" X 6" BY CUT TO FIT (DOUBLED) (8 REQD). LAMINATE W/1-10d NAIL EVERY 6". POSITION BETWEEN CENTER GATES, PIECES MARKED ① AND ② IN THE SECOND LAYER AND TOENAIL THE TOP PIECE W/2-16d NAILS AT EACH END.
- ⑥ VERTICAL STRUT BRACING, 2" X 4" X 8'-6" (4 REQD). NAIL TO THE STRUTS, PIECES MARKED ④ AND ⑤, W/3-10d NAILS AT EACH JOINT.
- ⑦ HORIZONTAL STRUT BRACING, 2" X 4" BY CAR WIDTH MINUS 9" IN LENGTH (2 REQD). NAIL TO THE STRUTS, PIECES MARKED ⑤, W/3-10d NAILS AT EACH JOINT.

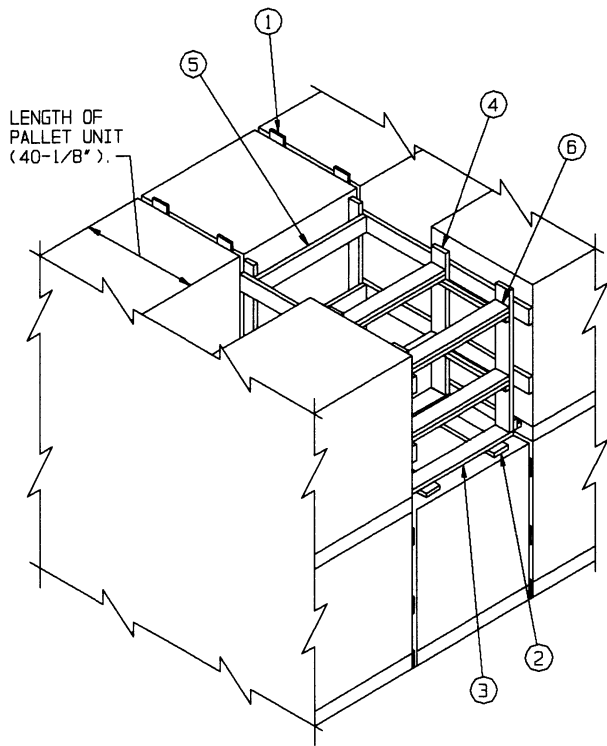


**KEY NUMBERS**

- ① MODIFIED SEPARATOR GATE (2 REQD). SEE THE APPLICABLE SEPARATOR GATE DETAIL ON PAGE 13 FOR POSITIONING OF THE VERTICAL PIECES. SEE SPECIAL NOTE 5 BELOW FOR GATE MODIFICATIONS.
- ② FILL PIECE, 2" X 6" X 36" (2 REQD). POSITION ON TOP OF PALLET UNIT, (6" APPROX) FROM THE ENDS OF THE CONTAINERS.
- ③ SUPPORT PIECE, 2" X 6" X 42" (2 REQD). POSITION ON TOP OF THE FILL PIECE, PIECE MARKED ②, AND SO AS TO BE UNDER THE VERTICAL PIECES OF THE LOAD BEARING GATE. NAIL TO THE FILL PIECES W/3-10d NAILS AT EACH JOINT. **CAUTION:** USE CARE NOT TO NAIL INTO A CONTAINER.
- ④ LOAD BEARING GATE (2 REQD, 1 RIGHT HAND AND 1 LEFT HAND). SEE THE DETAIL BELOW. POSITION AS SHOWN AND TOENAIL TO THE SUPPORT PIECES, PIECE MARKED ③, W/2-10d NAILS AT EACH JOINT.
- ⑤ BACK-UP PIECE, 2" X 6" BY CUT TO FIT (2 REQD). NAIL TO THE LOAD BEARING PIECE OF PIECE MARKED ④, W/2-10d NAILS.
- ⑥ STRUT, 2" X 6" BY CUT TO FIT (DOUBLED) (4 REQD). LAMINATE W/1-10d NAIL EVERY 6" AND TOENAIL THE TOP PIECE TO PIECES MARKED ④, W/2-16d NAILS AT EACH END.

**ISOMETRIC VIEW**


**SPECIAL NOTES:**


- 1. A PARTIAL VIEW OF A 9'-0" WIDE CONVENTIONAL TYPE BOX CAR IS SHOWN. CARS OF OTHER WIDTHS CAN BE USED.
- 2. AN UNIT OMITTED FROM THE TOP LAYER OF A 2-LAYER LOAD IS SHOWN AS TYPICAL. THE PROCEDURES ARE ALSO APPLICABLE FOR THE OMISSION OF A PALLET UNIT FROM A 1-LAYER LOAD.
- 3. THE OMITTED-UNIT PROCEDURE SHOULD BE APPLIED NEAR THE CENTER OF THE CAR LENGTH, BUT NOT IN THE DOORWAY AREA. ALSO, THERE SHOULD BE AT LEAST ONE LOAD UNIT BETWEEN THE OMITTED UNIT AND A CENTER GATE.
- 4. ONLY THE BLOCKING AND BRACING FOR THE OMITTED UNIT IS SHOWN; REFER TO PAGE 6 FOR THE BLOCKING AND BRACING REQUIREMENTS FOR THE BALANCE OF THE LOAD.
- 5. NOTE THAT THE VERTICAL PIECES OF EACH SEPARATOR GATE ADJACENT TO THE OMITTED UNIT MUST BE ADJUSTED (REF: 53") SO AS TO PROVIDE CLEARANCE BETWEEN IT AND THE LOAD BEARING GATE MARKED ④, AND THAT THE TOP TWO HORIZONTAL PIECES WITHIN THE 2-HIGH PORTION OF THE LOAD WILL BE 40-1/8" LONG.

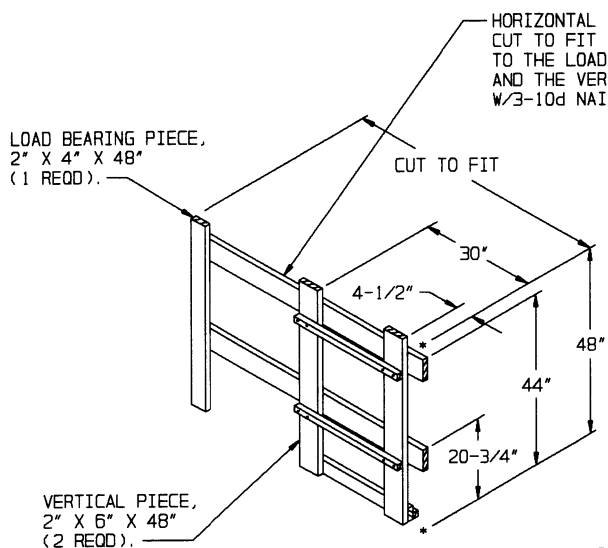

**LOAD BEARING GATE**

NOTE: A RIGHT HAND GATE IS SHOWN.

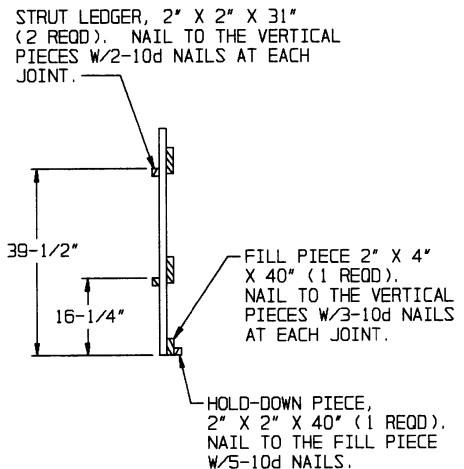

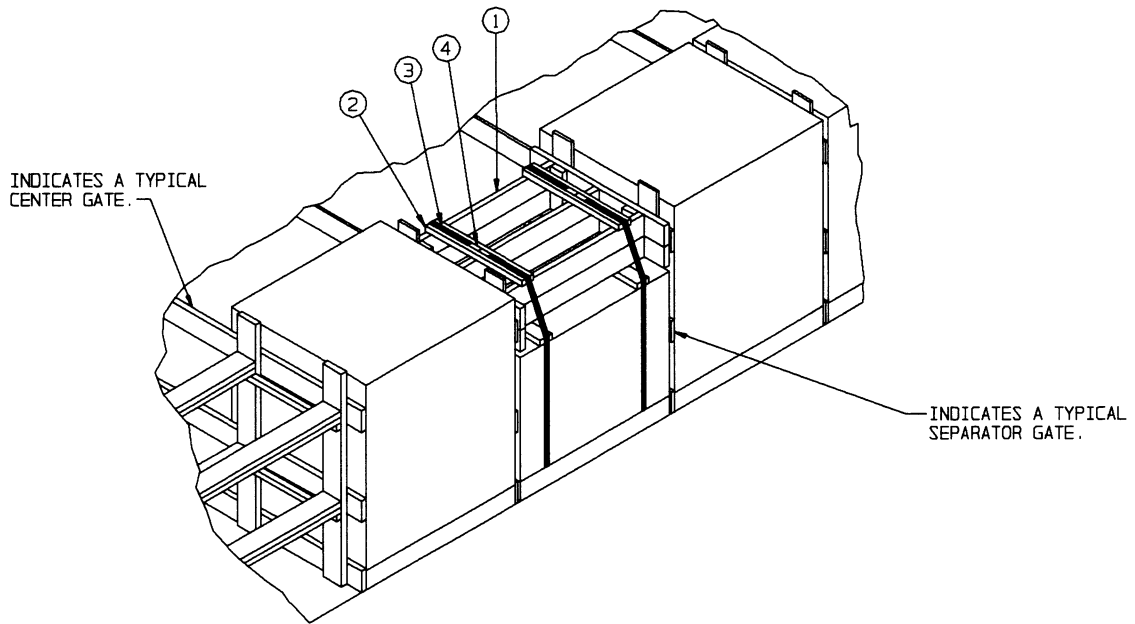


**POSITIONING OF A PARTIAL UNIT WITHIN A LAYER**


**KEY NUMBERS**

**SPECIAL NOTES:**

1. SHIPMENTS OF CARTRIDGES SHOULD CONSIST OF FULL-HEIGHT AND FULL-LAYER UNITS TO THE MAXIMUM EXTENT POSSIBLE. HOWEVER, THE END OF A LOT, OR THE QUANTITY OF ITEMS NEEDED TO FILL A REQUISITION, MAY NECESSITATE THE SHIPMENT OF ONE OR MORE LESS-THAN-FULL PALLET UNITS WITHIN A LOAD. THE PROCEDURES ON THIS PAGE ARE PRESENTED AS GUIDANCE IN THE SHIPMENT OF A PARTIAL UNIT WITHIN A 1-LAYER OR 2-LAYER LOAD.
2. A LESS-THAN-FULL HEIGHT PALLET UNIT WHICH IS TO BE SHIPPED WITHIN A LAYER OF A LOAD WILL BE LIMITED TO NOT LESS THAN FOUR LAYERS OF CONTAINERS ON THE PARTIAL UNIT. THE DEPICTED PROCEDURES SHOW THE BRACING OF A 4-LAYER UNIT WITHIN A LOAD; FOR A 5-LAYER UNIT, CONSTRUCT A HALF-HIGH SPACER ASSEMBLY.
3. A PARTIAL UNIT MUST CONSIST OF FULL LAYERS OF FIVE CONTAINERS OR EMPTY CONTAINERS AS SPECIFIED BY DRAWING 19-48-4231/48-20PM1006, MUST BE INSTALLED IN THE PLACE OF OMITTED CONTAINERS.
4. THE FILLER CONTAINERS AS REFERENCED IN SPECIAL NOTE 3 AND THE DUNNAGE DEPICTED ABOVE FOR THE SHIPMENT OF THE PARTIAL UNIT MAY BE REMOVED WHEN A SHIPMENT REACHES DESTINATION. OR IF DESIRED, THE FILLERS MAY REMAIN WITH THE UNIT DURING STORAGE (IF APPLICABLE) FOR POSSIBLE USE IN A FUTURE SHIPMENT.
5. THE "POSITIONING OF PARTIAL UNIT WITHIN A LAYER" VIEW ABOVE DEPICTS A PORTION OF A CONVENTIONAL BOX CAR LOAD, HOWEVER, THE PROCEDURES ARE ALSO APPLICABLE FOR LOADS IN CARS EQUIPPED WITH LOAD DIVIDER BULKHEADS.

- ① FILLER ASSEMBLY (1 REQD). SEE THE "FILLER ASSEMBLY" DETAIL BELOW. SEE GENERAL NOTE "M" ON PAGE 2.
- ② STRAPPING BOARD, 2" X 6" X 27" (2 REQD). POSITION ON TOP OF THE FILLER ASSEMBLY, PIECE MARKED ①. NAIL TO THE STRUTS W/1-10d NAIL AT EACH JOINT.
- ③ UNITIZING STRAP, 1-1/4" X .031" OR .035" X 17'-0" LONG STEEL STRAPPING (2 REQD).
- ④ SEAL FOR 1-1/4" STRAPPING (4 REQD, 2 PER STRAP). SEE GENERAL NOTE "O" ON PAGE 2.

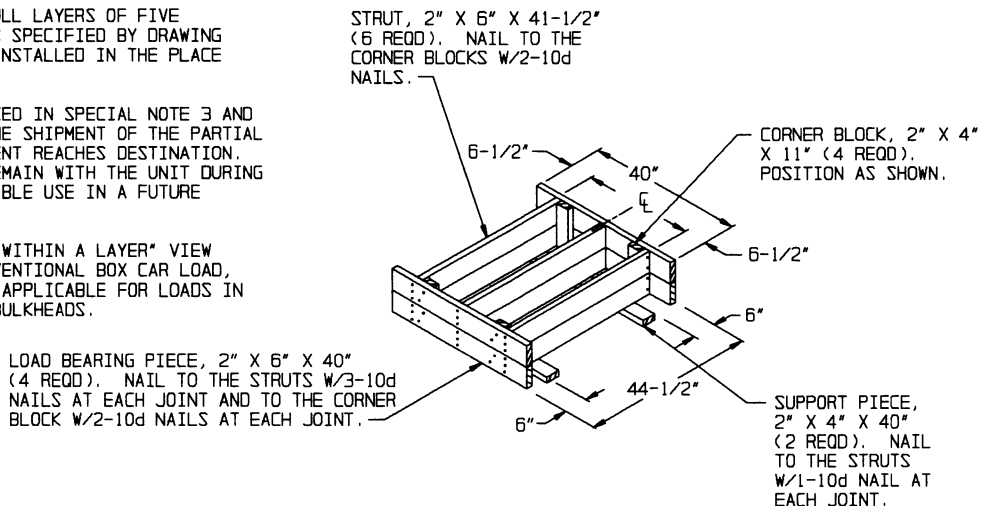

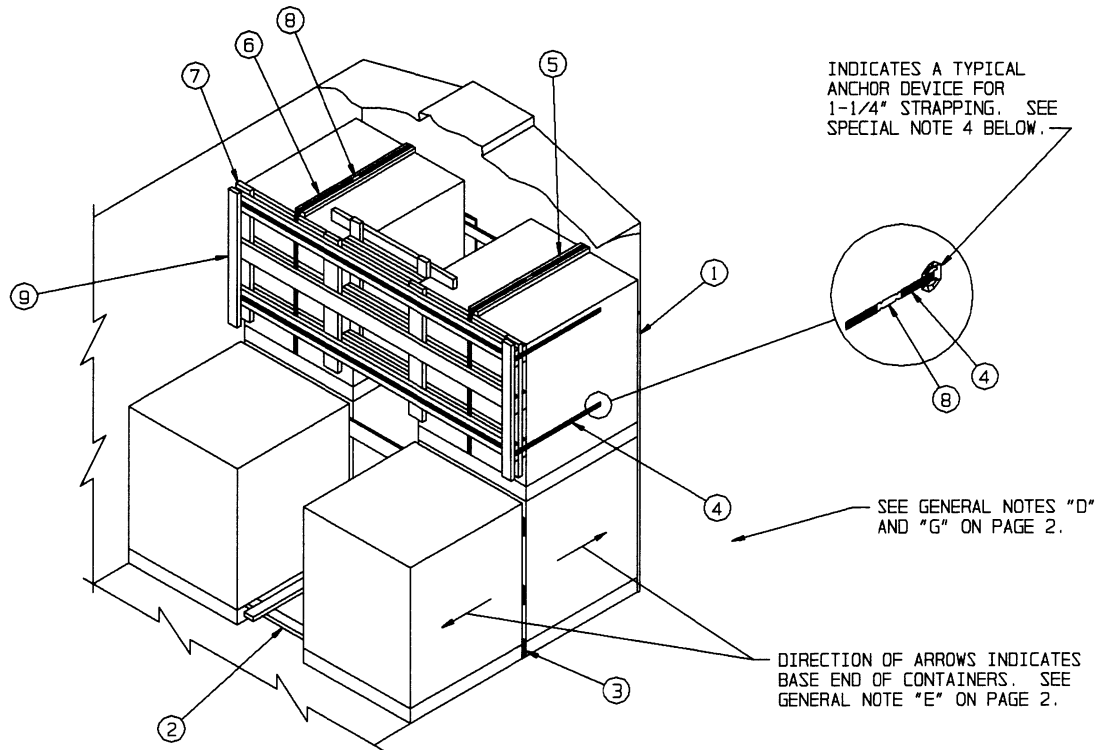


**ISOMETRIC VIEW**

**KEY NUMBERS**


**SPECIAL NOTES:**

1. A 9'-2" WIDE ALL-METAL BOXCAR EQUIPPED WITH STRAP ANCHOR DEVICES AND HAVING AN AAR MECHANICAL DESIGNATION CLASS OF XL IS SHOWN. CARS OF OTHER WIDTHS CAN BE USED.
2. THE BULKHEAD GATE METHOD OF PARTIAL-LAYER BRACING IS ONLY APPLICABLE FOR USE IN LOADS OF LENGTHWISE POSITIONED PALLET UNITS AS SHOWN IN THE VIEW ABOVE. PARTIAL LAYERS OF CROSSWISE POSITIONED PALLET UNITS WILL NOT BE RETAINED BY THE BULKHEAD GATE METHOD.
3. A BULKHEAD GATE USED IN CONJUNCTION WITH THREE BULKHEAD STRAPS WILL RETAIN UP TO 7,000 POUNDS OF LADING; A BULKHEAD GATE WITH TWO STRAPS WILL RETAIN NOT MORE THAN 5,000 POUNDS. IF ONLY TWO STRAPS ARE USED, THEY MUST BE APPLIED OVER THE UPPER AND LOWER STRAPPING BOARDS.
4. THE ANCHOR DEVICES TO BE USED FOR THE ATTACHMENT OF THE BULKHEAD STRAPS MUST BE LOCATED AT LEAST THIRTY-SIX INCHES TOWARD THE CAR ENDWALL FROM THE OPPOSITE-THE-LOAD SIDE OF THE BULKHEAD GATE. IF THE ANCHOR DEVICES IN THE CAR BEING LOADED ARE NOT LOCATED NEAR ENOUGH TO THE END OF THE CAR SO THAT THE 36" REQUIREMENT CAN BE SATISFIED, IT WILL BE NECESSARY TO INSTALL GATES AND STRUTS AT THE END OF THE CAR. THESE GATES WILL BE 1-HIGH GATES FOR THE ITEM BEING LOADED AND WILL BE INSTALLED SIMILAR TO THE STRUTTED GATE METHOD SHOWN ON PAGE 19 FOR AN EVEN QUANTITY OF UNITS, OR THE PALLET UNIT OMITTED PROCEDURES ON PAGE 20 FOR A SINGLE UNIT.
5. THE STRAPPING BOARDS ON A BULKHEAD GATE ARE TO BE ALIGNED AS NEARLY AS POSSIBLE WITH THE ANCHOR DEVICES IN THE CAR TO WHICH THE BULKHEAD STRAPS ARE ATTACHED. TOLERANCES ARE SPECIFIED ON THE END VIEW OF THE BULKHEAD GATE ON PAGE 23, FOR THE LOCATION OF THE HORIZONTAL PIECES IN RELATION TO THE LOCATION OF STRAPPING BOARDS. THE STRAPPING BOARDS/HORIZONTAL PIECES SHOULD BE LOCATED WITHIN THESE TOLERANCES.


- ① ENDWALL LINING (1 REQD). SEE THE DETAIL ON PAGE 36. SEE GENERAL NOTE "D" ON PAGE 2. NOTE THAT IF AN END-OF-CAR BULKHEAD, AS DETAILED ON PAGE 39 IS USED, THE ENDWALL LINING IS NOT REQUIRED.
- ② ANTI-SWAY BRACE (3 REQD). SEE THE "ANTI-SWAY BRACE" DETAIL ON PAGE 12. INSTALL BETWEEN LATERALLY ADJACENT PALLET UNITS. SEE GENERAL NOTES "M" AND "N" ON PAGE 2.
- ③ SEPARATOR GATE FOR 1-HIGH LOAD (1 REQD). SEE THE "SEPARATOR GATE A" DETAIL ON PAGE 13.
- ④ BULKHEAD STRAP, 1-1/4" X .035" OR .031" BY A LENGTH TO SUIT STEEL STRAPPING (2 REQD). INSTALL FROM 2 EQUAL LENGTH PIECES. ATTACH TO AN ANCHOR WITH 1 SEAL. SEE THE "STRAP APPLICATION PLAN VIEW" ON PAGE 23 FOR INSTALLATION GUIDANCE. SEE SPECIAL NOTES 3 AND 4 AT LEFT.
- ⑤ STRAPPING BOARD, 2" X 6" X 44-1/2" (2 REQD).
- ⑥ BUNDLING STRAP, 1-1/4" X .035" OR .031" X 18'-0" LONG (REF) STEEL STRAPPING (2 REQD). ENCIRCLE THE PALLET UNIT, THE HORIZONTAL PIECES OF THE BULKHEAD GATE, AND A STRAPPING BOARD, PIECE MARKED ⑤. TENSION AND SEAL AFTER TENSIONING THE BULKHEAD STRAPS, PIECES MARKED ④. STAPLE TO STRAPPING BOARD, PIECE MARKED ⑤, W/2-STAPLES.
- ⑦ BULKHEAD GATE (1 REQD). SEE THE DETAIL ON PAGE 23.
- ⑧ SEAL FOR 1-1/4" STRAPPING (10 REQD, 4 PER BULKHEAD STRAP, PIECE MARKED ④, AND 1 PER BUNDLING STRAP, PIECE MARKED ⑥). DOUBLE NOTCH EACH SEAL. SEE GENERAL NOTE "O" ON PAGE 2.
- ⑨ STRAP RETAINER, 2" X 4" BY A LENGTH TO SUIT (2 REQD). NAIL TO THE BULKHEAD GATE W/2-12d NAILS ABOVE AND BELOW EACH BULKHEAD STRAP.

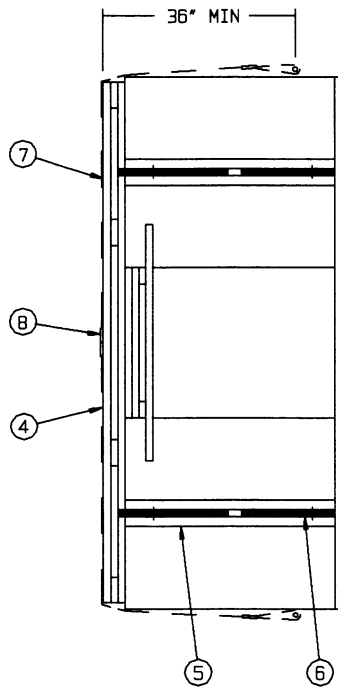

**STRAP APPLICATION PLAN VIEW**

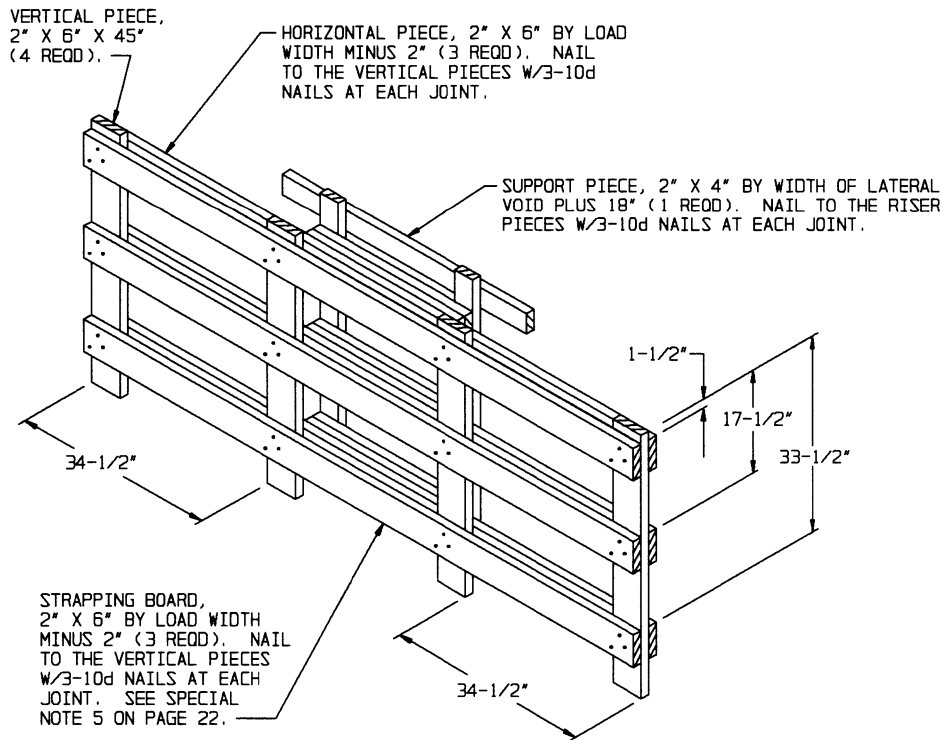


**BULKHEAD GATE**

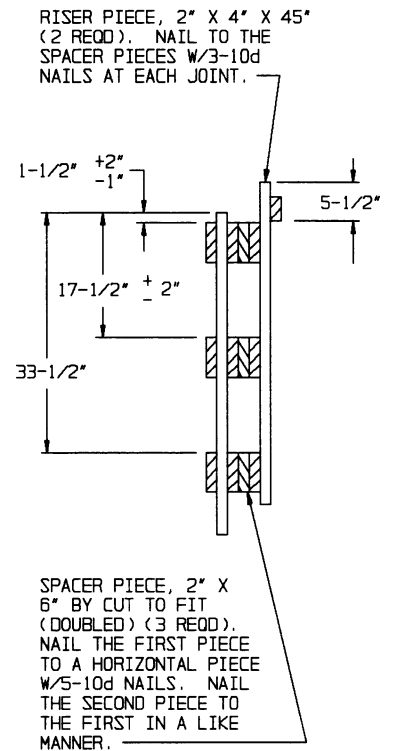

**END VIEW**

THE DIRECTION OF THE ARROW INDICATES  
BASE END OF CONTAINERS. SEE GENERAL  
NOTE "E" ON PAGE 2.


WIDTH OF PALLET  
UNIT (44-1/2").

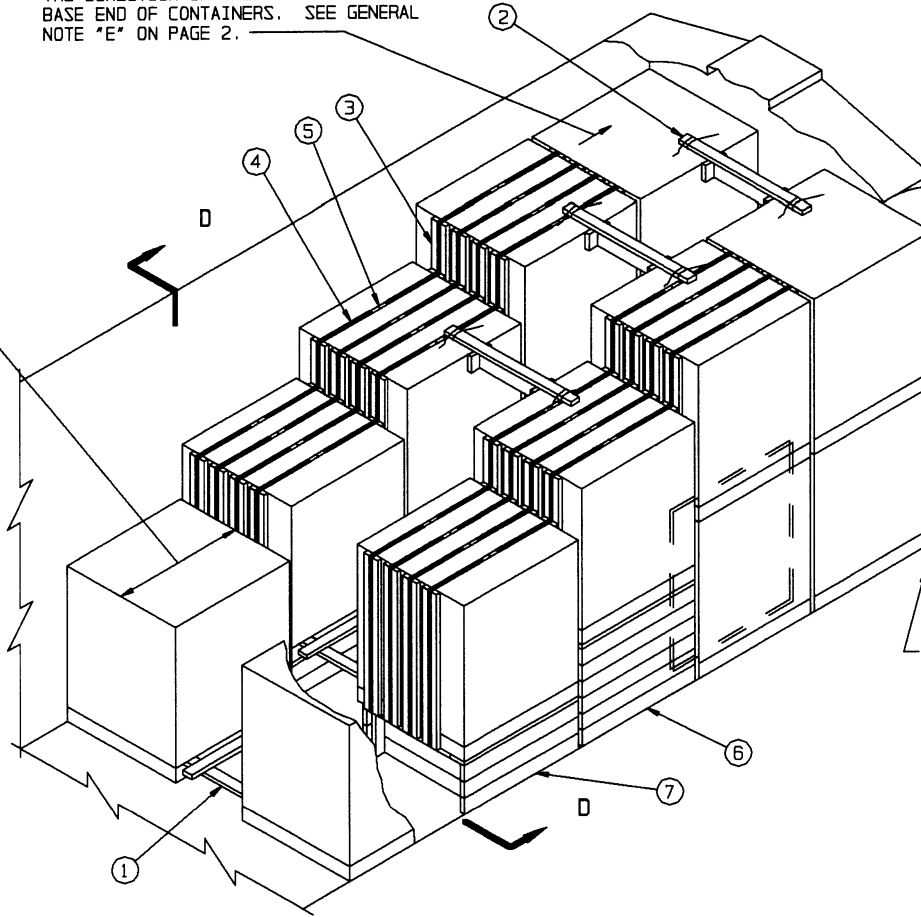

SEE GENERAL NOTES  
"D" AND "G" ON  
PAGE 2.

**ISOMETRIC VIEW**


**KEY NUMBERS**

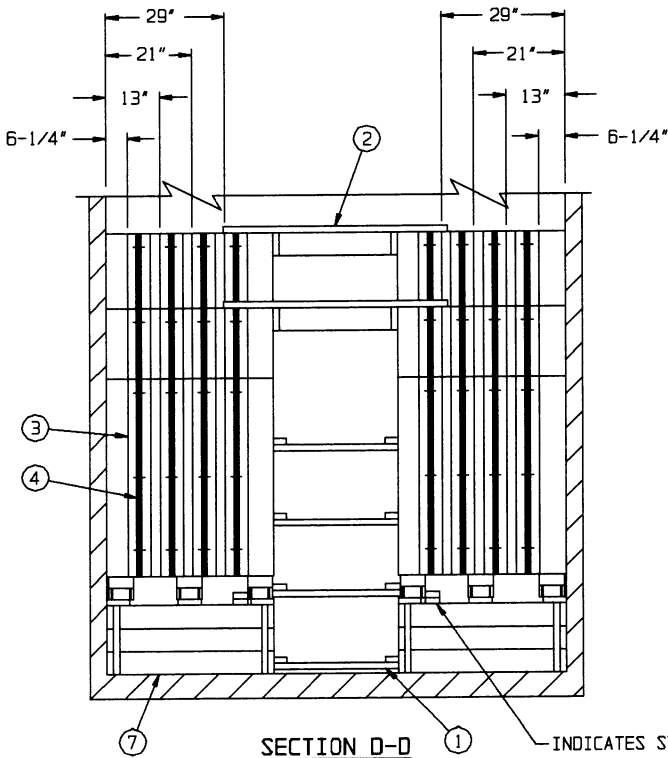

**SECTION D-D** ① — INDICATES STOP PIECE.

- ① ANTI-SWAY BRACE (7 REQD). SEE THE DETAIL ON PAGE 12. INSTALL BETWEEN LATERALLY ADJACENT PALLET UNITS. SEE GENERAL NOTES "M" AND "N" ON PAGE 2.
- ② TOP-OF-LOAD ANTI-SWAY BRACE (3 REQD). SEE THE DETAIL ON PAGE 12. WIRE TIE TO PALLET UNITS AS SHOWN BY THE "TIE WIRE APPLICATION" DETAIL ON PAGE 39.
- ③ STRAPPING BOARD, 2" X 6" X 47" (64 REQD, 8 PER PALLET UNIT). POSITION AS SHOWN ABOVE AND IN THE "SECTION D-D" VIEW AT LEFT.
- ④ REINFORCING STRAP, 1-1/4" X .035" OR .031" X 18'-0" LONG (REF) STEEL STRAPPING (32 REQD). INSTALL TO ENCIRCLE THE PALLET UNIT AND THE STRAPPING BOARDS. SECURE TO A STRAPPING BOARD W/3 STAPLES.
- ⑤ SEAL FOR 1-1/4" STRAPPING (64 REQD, 2 PER STRAP). DOUBLE CRIMP EACH SEAL. SEE GENERAL NOTE "O" ON PAGE 2.
- ⑥ RISER ASSEMBLY (2 REQD). SEE THE "RISER ASSEMBLY A" DETAIL ON PAGE 25.
- ⑦ RISER ASSEMBLY (2 REQD). SEE THE "RISER ASSEMBLY B" DETAIL ON PAGE 25.



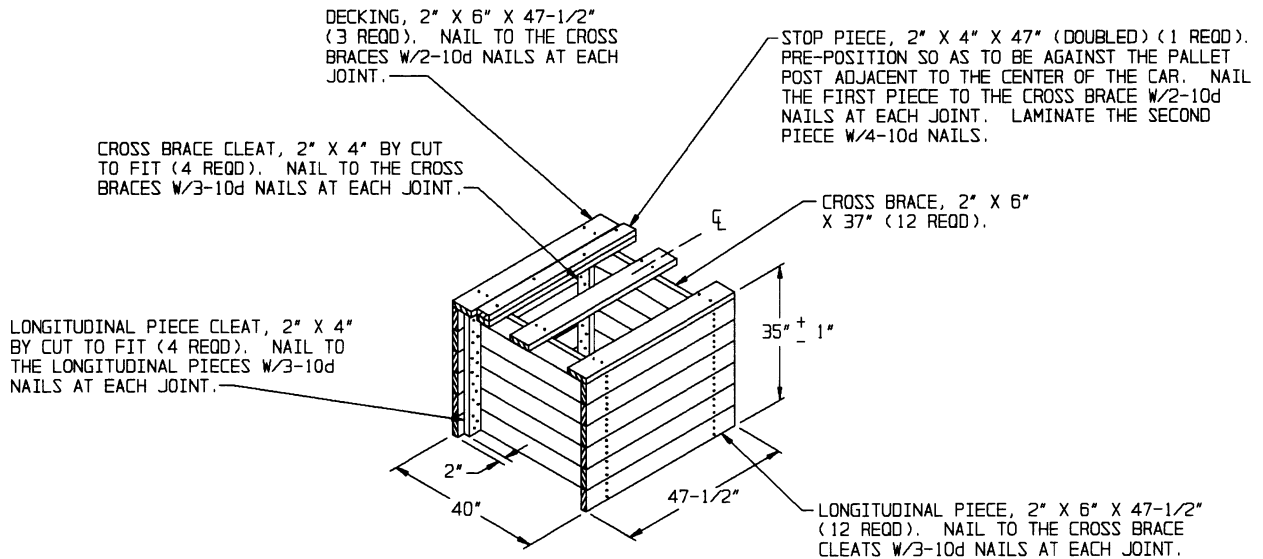


**RISER ASSEMBLY A**

**SPECIAL NOTES FOR LOAD:**


1. A 9'-2" WIDE CONVENTIONAL TYPE WOOD-LINED BOX CAR IS SHOWN. CARS OF OTHER WIDTHS CAN BE USED.
2. ONLY THE BLOCKING AND BRACING FOR THE RISER METHOD OF PARTIAL LAYER BRACING IS SHOWN. REFER TO THE APPLICABLE LOAD PAGE FOR THE BLOCKING AND BRACING REQUIREMENTS FOR THE BALANCE OF THE LOAD.

**SPECIAL NOTES FOR RISER ASSEMBLY:**

1. A TWO-THIRDS HEIGHT RISER IS SHOWN AS RISER ASSEMBLY "A" AND AS PIECE MARKED ⑥ IN THE LOAD ON PAGE 24. THE RISER IS CONSTRUCTED TO BE 35" IN HEIGHT AFTER THE DECKING IS IN PLACE. NOTE: A PLUS OR MINUS 1" TOLERANCE IS PERMISSIBLE.
2. A ONE-THIRD HEIGHT RISER IS SHOWN AS RISER ASSEMBLY "B" AND AS PIECE MARKED ⑦ IN THE LOAD ON PAGE 24. THE RISER IS CONSTRUCTED TO BE 18" IN HEIGHT AFTER THE DECKING IS IN PLACE. NOTE: A PLUS OR MINUS 1" TOLERANCE IS PERMISSIBLE.

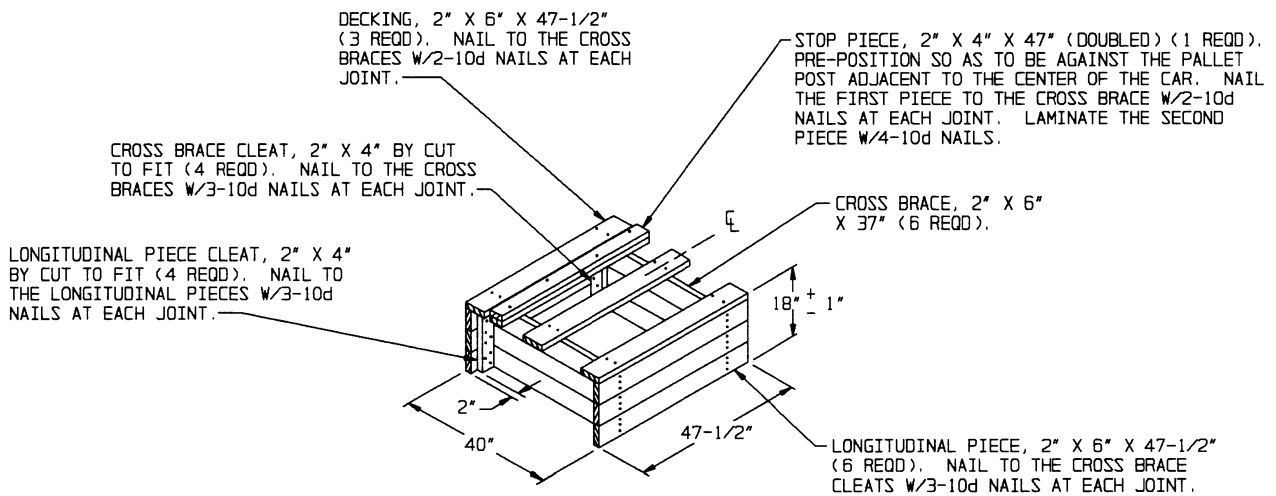

**RISER ASSEMBLY B**

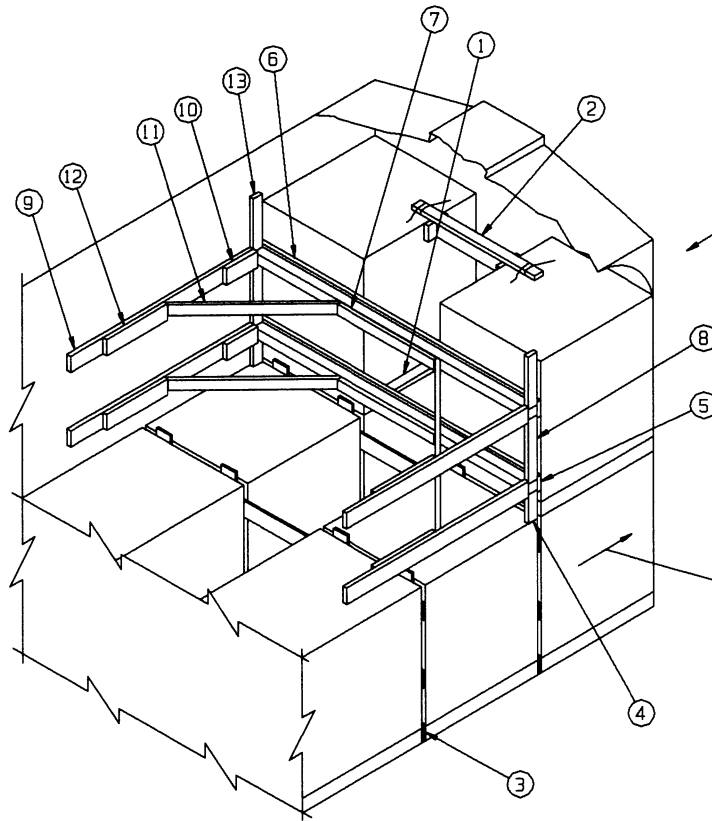

IF THE CAR HAS A BOWED ENDWALL, A BULKHEAD MUST BE INSTALLED. SEE THE "END-OF-CAR BULKHEAD" DETAIL ON PAGE 39.

DIRECTION OF ARROW INDICATES BASE END OF CONTAINER. SEE GENERAL NOTE "E" ON PAGE 2.


### ISOMETRIC VIEW

### KEY NUMBERS


#### SPECIAL NOTES:

1. A 9'-2" WIDE CONVENTIONAL WOOD-LINED BOX CAR IS SHOWN. WOOD-LINED CARS OF OTHER WIDTHS CAN BE USED.
2. THE K-BRACE METHOD OF PARTIAL-LAYER (TIER) BRACING SHOWN MAY BE USED IN WOOD-LINED CARS FOR THE SECUREMENT OF A PARTIAL TOP TIER, BE A SECOND TIER, OR FIRST. THE TYPE "A" K-BRACE SHOWN IS ADEQUATE FOR RETAINING A PARTIAL TIER OF NOT MORE THAN 8,000 POUNDS, OR TWO PALLET UNITS. IF IT IS NECESSARY TO BLOCK A HEAVIER LOAD, REFER TO THE DETAILS ON PAGES 27, 28, AND 29 FOR SELECTION OF THE APPLICABLY SIZED K-BRACE TO USE AND THE DESIGN SPECIFICATIONS FOR THE BRACE.
3. CAUTION: SOME CARS ARE NOT SUITED FOR THE APPLICATION OF "PARTIAL-LAYER BRACING" BECAUSE THE LENGTH OF THE PARTIAL TIER TO BE SHIPPED AND/OR THE SIZE OR CONFIGURATION OF THE CAR DOORS WILL NOT PERMIT PROPER INSTALLATION OF THE SPECIFIED K-BRACE DUNNAGE. PIECES MARKED ④, ⑤, ⑥, ⑧, ⑩, AND ⑬ MUST BE SUPPORTED AT THE SIDES OF A CAR BY A CAR SIDEWALL. IT IS ALRIGHT FOR THE ENDS OF THE DIAGONAL BRACES MARKED ⑪ TO BEAR IN FRONT OF A DOOR OPENING, HOWEVER, THE ADJACENT PIECE MARKED ⑨ MUST BE DOUBLED AND EXTENDED ACROSS AND FAR ENOUGH PAST THE DOOR OPENING (REF: 60"), TO PROVIDE FOR THE SPECIFIED NAILING OF EACH PIECE. LAMINATE THE SECOND PIECE OF THE DOUBLED PIECE MARKED ⑨ TO THE FIRST W/16-16d NAILS. CLINCH THOSE NAILS WHICH PROTRUDE THRU THE HORIZONTAL WALL CLEAT WITHIN THE DOOR OPENING. NOTE THAT THE DIAGONAL BRACE WILL BE 52-1/4" LONG IN LIEU OF 54-1/4" WHEN PIECE MARKED ⑨ IS DOUBLED.
4. THE CENTER CLEAT, SHOWN AS PIECE MARKED ⑦, WILL BE 22" LONG FOR AN 8'-6" WIDE CAR, 30" LONG FOR A 9'-2", AND 32" LONG FOR A 9'-4" WIDE CAR. ADJUST THE LENGTH PROPORTIONATELY FOR CARS OF OTHER WIDTHS.

- ① ANTI-SWAY BRACE (2 REQD). SEE THE DETAIL ON PAGE 12. INSTALL BETWEEN LATERALLY ADJACENT PALLET UNITS. SEE GENERAL NOTES "M" AND "N" ON PAGE 2.
- ② TOP-OF-LOAD ANTI-SWAY BRACE (1 REQD). SEE THE DETAIL ON PAGE 12. WIRE TIE TO PALLET UNITS AS SHOWN BY THE "TIE WIRE APPLICATION" DETAIL ON PAGE 39. NOTE THAT THE QUANTITY IS ONLY FOR THE PARTIAL-TIER UNITS.
- ③ SEPARATOR GATE (2 REQD). SEE THE "SEPARATOR GATE A" DETAIL ON PAGE 13.
- ④ SUPPORT CLEAT, 2" X 4" X 10" (2 REQD). NAIL TO THE CAR SIDEWALL W/3-12d NAILS. POSITION SO AS TO CENTER PIECES MARKED ⑤ AND ⑥ ON THE JOINT BETWEEN THE BOTTOM TWO LAYERS OF CONTAINERS ON THE UNITS. SEE SPECIAL NOTE 3 AT LEFT.
- ⑤ HORIZONTAL PIECE, 2" X 6" BY CAR WIDTH IN LENGTH (CUT TO FIT) (2 REQD). NAIL TO THE CROSS CAR BRACE, PIECE MARKED ⑥, W/1-12d NAIL EVERY 6".
- ⑥ CROSS CAR BRACE, 4" X 4" BY CAR WIDTH IN LENGTH (CUT TO FIT) (2 REQD).
- ⑦ CENTER CLEAT, 2" X 4" X 30" (2 REQD). NAIL TO THE CROSS CAR BRACE, PIECE MARKED ⑥, W/6-16d NAILS. SEE SPECIAL NOTE 4 AT LEFT.
- ⑧ SPACER CLEAT, 2" X 4" X 22" (2 REQD). NAIL TO THE CAR SIDEWALL W/5-12d NAILS.
- ⑨ HORIZONTAL WALL CLEAT, 2" X 6" X 72" (4 REQD). NAIL TO THE CAR SIDEWALL W/16-12d NAILS.
- ⑩ POCKET CLEAT, 2" X 6" X 12" (4 REQD). NAIL TO THE HORIZONTAL WALL CLEAT, PIECE MARKED ⑨, W/4-16d NAILS.
- ⑪ DIAGONAL BRACE, 2" X 4" X 54-1/4" (4 REQD). SEE THE DETAIL AT LEFT FOR BEVEL CUTS REQUIRED. TOENAIL TO THE CROSS CAR BRACE, PIECE MARKED ⑥, AND TO THE HORIZONTAL WALL CLEAT, PIECE MARKED ⑨, W/2-16d NAILS AT EACH END.
- ⑫ BACK-UP CLEAT, 2" X 6" X 24" (4 REQD). NAIL TO THE HORIZONTAL WALL CLEAT, PIECE MARKED ⑨, W/8-16d NAILS.
- ⑬ HOLD DOWN CLEAT, 2" X 4" X 18" (2 REQD). NAIL TO THE CAR SIDEWALL W/5-12d NAILS.



DIAGONAL BRACE

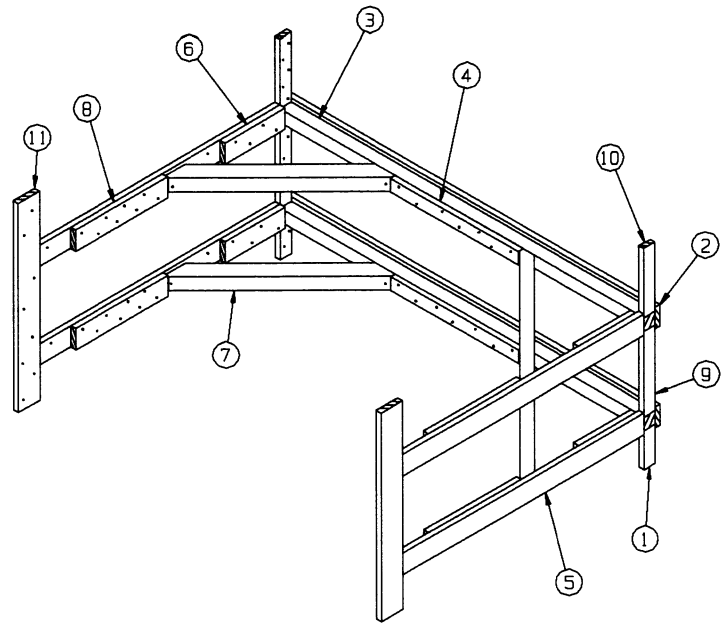


**ISOMETRIC VIEW**

**KEY NUMBERS**

**SPECIAL NOTES:**

1. THE TYPE "B" K-BRACE SHOWN IS ADEQUATE FOR RETAINING A PARTIAL TIER OF NOT MORE THAN 14,000 POUNDS OR NOT MORE THAN FOUR PALLET UNITS. IF THE PARTIAL TIER IS TO BE BRACED IS SIX OR EIGHT PALLET UNITS, THE TYPE "C" K-BRACE DEPICTED ON PAGE 28 MAY BE USED, OR TYPE "D" K-BRACE DEPICTED ON PAGE 29 MAY BE USED IF THE PARTIAL TIER IS MORE THAN EIGHT PALLET UNITS. IF THE PARTIAL TIER IS ONLY TWO PALLET UNITS, THE TYPE "A" K-BRACE ON PAGE 26 IS ADEQUATE.
2. CAUTION: SOME CARS ARE NOT SUITED FOR THE APPLICATION OF "PARTIAL-LAYER BRACING" BECAUSE THE LENGTH OF THE PARTIAL TIER TO BE SHIPPED AND/OR THE SIZE OR CONFIGURATION OF THE CAR DOORS WILL NOT PERMIT PROPER INSTALLATION OF THE SPECIFIED K-BRACE DUNNAGE. PIECES MARKED ①, ②, ③, ⑥, ⑨, ⑩, AND ⑪ MUST BE SUPPORTED AT THE SIDES OF A CAR BY A CAR SIDEWALL. IT IS ALRIGHT FOR THE ENDS OF THE DIAGONAL BRACES MARKED ⑦ TO BEAR IN FRONT OF A DOOR OPENING, HOWEVER, THE ADJACENT PIECE MARKED ⑤ MUST BE DOUBLED AND EXTENDED ACROSS AND FAR ENOUGH PAST THE DOOR OPENING (REF: 54"), TO PROVIDE FOR THE SPECIFIED NAILING OF EACH PIECE. LAMINATE THE SECOND PIECE OF THE DOUBLED PIECE MARKED ⑤ TO THE FIRST W/16-16d NAILS. CLINCH THOSE NAILS WHICH PROTRUDE THRU THE HORIZONTAL WALL CLEAT WITHIN THE DOOR OPENING. NOTE THAT THE DIAGONAL BRACE WILL BE 52-1/4" LONG IN LIEU OF 54-1/4" WHEN PIECE MARKED ⑤ IS DOUBLED.
3. THE CENTER CLEAT, SHOWN AS PIECE MARKED ④, WILL BE 22" LONG FOR AN 8'-6" WIDE CAR, 30" LONG FOR A 9'-2", AND 32" LONG FOR A 9'-4" WIDE CAR. ADJUST THE LENGTH PROPORTIONATELY FOR CARS OF OTHER WIDTHS.
4. REFER TO PAGE 26 FOR A TYPICAL INSTALLATION OF A K-BRACE.


- ① SUPPORT CLEAT, 2" X 4" X 10" (2 REQD). NAIL TO THE CAR SIDEWALL W/3-12d NAILS. POSITION SO AS TO CENTER PIECES MARKED ② AND ③ ON THE JOINT BETWEEN THE BOTTOM TWO LAYERS OF CONTAINERS ON THE UNITS. SEE SPECIAL NOTE 2 AT LEFT.
- ② LOAD BEARING PIECE, 2" X 6" BY CAR WIDTH IN LENGTH (CUT TO FIT) (2 REQD). NAIL TO THE CROSS CAR BRACE, PIECE MARKED ③, W/1-12d NAIL EVERY 6". SEE GENERAL NOTES "M" AND "N" ON PAGE 2.
- ③ CROSS CAR BRACE, 4" X 4" BY CAR WIDTH IN LENGTH (CUT TO FIT) (2 REQD).
- ④ CENTER CLEAT, 2" X 4" X 30" (2 REQD). NAIL TO THE CROSS CAR BRACE, PIECE MARKED ③, W/7-16d NAILS. SEE SPECIAL NOTE 3 AT LEFT.
- ⑤ HORIZONTAL WALL CLEAT, 2" X 6" X 72" (4 REQD). NAIL TO THE CAR SIDEWALL W/16-12d NAILS.
- ⑥ POCKET CLEAT, 2" X 6" X 18" (4 REQD). NAIL TO THE HORIZONTAL WALL CLEAT, PIECE MARKED ⑤, W/4-16d NAILS.
- ⑦ DIAGONAL BRACE, 4" X 4" X 54-1/4" (4 REQD). SEE THE DETAIL AT LEFT FOR BEVEL CUTS REQUIRED. TOENAIL TO THE CROSS CAR BRACE, PIECE MARKED ③, AND TO THE HORIZONTAL WALL CLEAT, PIECE MARKED ⑤, W/1-60d NAIL AT EACH END.
- ⑧ BACK-UP CLEAT, 2" X 6" X 30" (4 REQD). NAIL TO THE HORIZONTAL WALL CLEAT, PIECE MARKED ⑤, W/8-16d NAILS.
- ⑨ SPACER CLEAT, 2" X 4" X 22" (2 REQD). NAIL TO THE CAR SIDEWALL W/5-12d NAILS.
- ⑩ HOLD-DOWN CLEAT, 2" X 4" X 18" (2 REQD). NAIL TO THE CAR SIDEWALL W/5-12d NAILS.
- ⑪ VERTICAL BACK-UP CLEAT, 2" X 6" BY UNIT HEIGHT (2 REQD). NAIL TO THE CAR SIDEWALL W/8-12d NAILS.

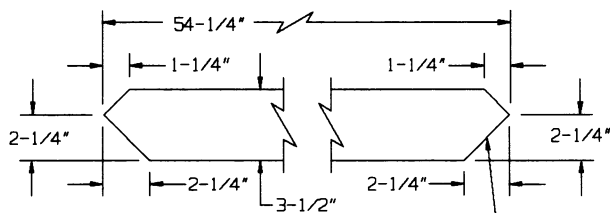

**DIAGONAL BRACE**

THIS BEARING SURFACE MUST BE POSITIONED SO AS TO BE IN CONTACT WITH A CROSS CAR BRACE, PIECE MARKED ③, OR A HORIZONTAL WALL CLEAT, PIECE MARKED ⑤.

**TYPE "B" K-BRACE**

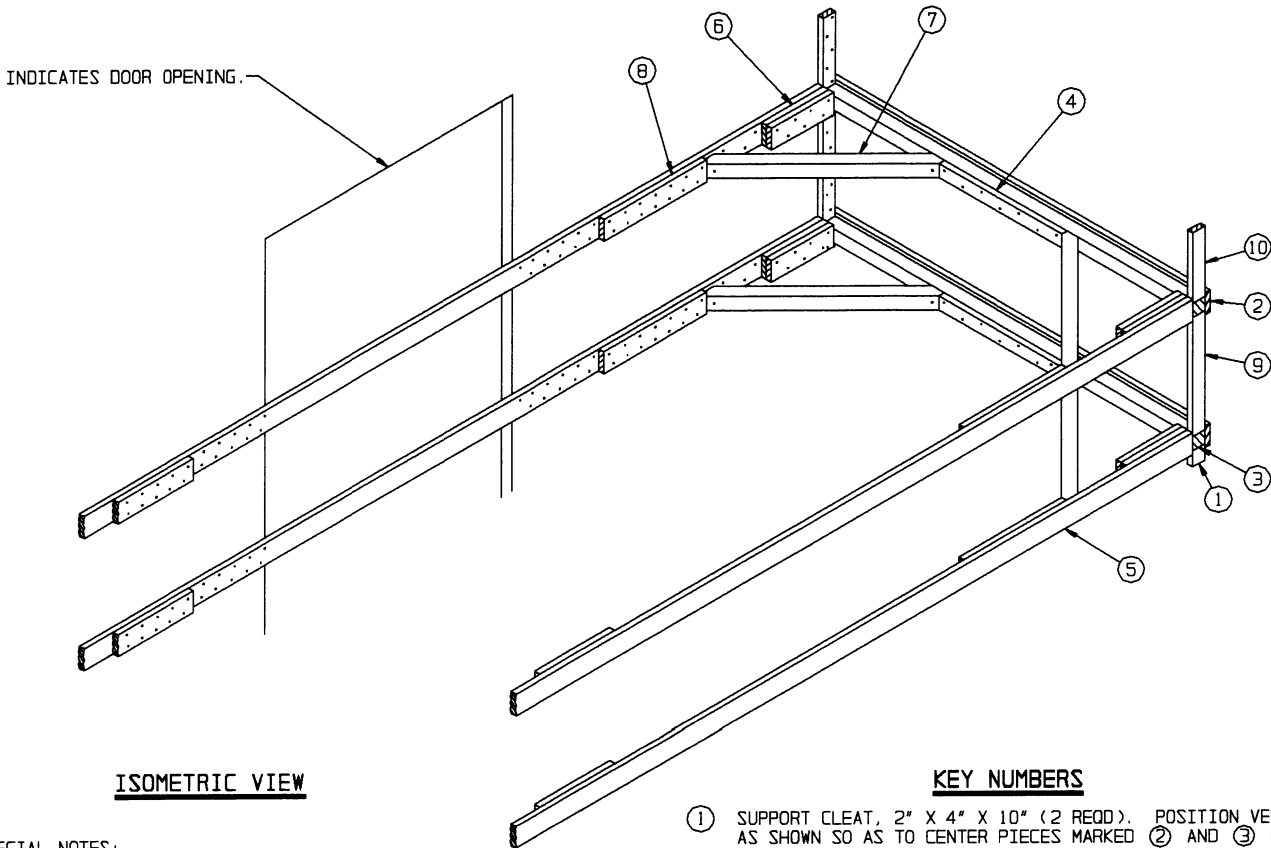


**ISOMETRIC VIEW**

**KEY NUMBERS**

**SPECIAL NOTES:**

1. THE TYPE "C" K-BRACE SHOWN IS ADEQUATE FOR RETAINING A PARTIAL TIER OF NOT MORE THAN 8 PALLET UNITS. IF IT IS NECESSARY TO BLOCK MORE THAN 8 PALLET UNITS, REFER TO THE DETAIL ON PAGE 29 FOR SELECTION OF THE APPLICABLY SIZED K-BRACE TO USE AND THE DESIGN SPECIFICATIONS FOR THE BRACE. IF THE PARTIAL TIER TO BE BRACED IS ONLY 4 PALLET UNITS, THE TYPE "B" K-BRACE DEPICTED ON PAGE 27 MAY BE USED. IF THE PARTIAL TIER IS ONLY TWO PALLET UNITS, THE TYPE "A" K-BRACE DEPICTED ON PAGE 26 WILL BE ADEQUATE.
2. **CAUTION:** SOME CARS ARE NOT SUITED FOR THE APPLICATION OF "PARTIAL-LAYER BRACING" BECAUSE THE LENGTH OF THE PARTIAL TIER TO BE SHIPPED AND/OR THE SIZE OR CONFIGURATION OF THE CAR DOORS WILL NOT PERMIT PROPER INSTALLATION OF THE SPECIFIED K-BRACE DUNNAGE. PIECES MARKED ①, ②, ③, ⑥, ⑨ AND ⑩ MUST BE SUPPORTED AT THE SIDES OF A CAR BY A CAR SIDEWALL. IT IS ALRIGHT FOR THE ENDS OF THE DIAGONAL BRACES MARKED ⑦ TO BEAR IN FRONT OF A DOOR OPENING, HOWEVER, THE ADJACENT PIECE MARKED ⑤ MUST BE DOUBLED. LAMINATE THE SECOND PIECE TO THE FIRST W/40-16d NAILS. CLINCH THOSE NAILS WHICH PROTRUDE THRU THE HORIZONTAL WALL CLEAT WITHIN THE DOOR OPENING. NOTE THAT THE DIAGONAL BRACE WILL BE 49-1/8" LONG IN LIEU OF 50-1/4" WHEN PIECE MARKED ⑤ IS DOUBLED.
3. THE CENTER CLEAT, SHOWN AS PIECE MARKED ④, WILL BE 28" LONG FOR AN 8'-6" WIDE CAR, 36" LONG FOR A 9'-2", AND 38" LONG FOR A 9'-4" WIDE CAR. ADJUST THE LENGTH PROPORTIONATELY FOR CARS OF OTHER WIDTHS.
4. **CAUTION:** A TYPE "C" K-BRACE MUST BE USED IN BOTH ENDS OF THE CAR; THE BRACE IS NOT DESIGNED FOR USE IN ONLY ONE END. NOTE THAT EXCEPT FOR PIECES MARKED ⑤, THE QUANTITIES SPECIFIED ARE APPLICABLE ONLY FOR THE BRACE IN ONE END.

- ① SUPPORT CLEAT, 2" X 4" X 10" (2 REQD). POSITION VERTICALLY AS SHOWN SO AS TO CENTER PIECES MARKED ② AND ③ ON THE JOINT BETWEEN THE BOTTOM TWO LAYERS OF CONTAINERS ON THE UNITS. NAIL TO THE CAR SIDEWALL W/3-12d NAILS.
- ② LOAD BEARING PIECE, 2" X 6" BY CAR WIDTH (CUT-TO-FIT) (2 REQD). NAIL TO THE CROSS CAR BRACE, PIECE MARKED ③, W/1-12d NAIL EVERY 6". SEE GENERAL NOTE "M" ON PAGE 2.
- ③ CROSS CAR BRACE, 4" X 4" BY CAR WIDTH (CUT-TO-FIT) (2 REQD).
- ④ CENTER CLEAT, 2" X 4" X 36" (2 REQD). NAIL TO THE CROSS CAR BRACE, PIECE MARKED ③, W/7-16d NAILS. SEE SPECIAL NOTE 3 AT LEFT.
- ⑤ HORIZONTAL WALL CLEAT, 2" X 6" X 72" (4 REQD). NAIL TO THE CAR SIDEWALL W/16-12d NAILS.
- ⑥ POCKET CLEAT, 2" X 6" X 18" (4 REQD). NAIL TO THE HORIZONTAL WALL CLEAT, PIECE MARKED ⑤, W/7-16d NAILS.
- ⑦ DIAGONAL BRACE, 4" X 4" X 50-1/4" (4 REQD). SEE THE DETAIL BELOW FOR BEVEL-CUTS REQUIRED. TOENAIL TO THE CROSS CAR BRACE, PIECE MARKED ③, AND TO THE HORIZONTAL WALL CLEAT, PIECE MARKED ⑤, W/1-60d NAIL AT EACH END.
- ⑧ BACK-UP CLEAT, 2" X 6" X 30" (4 REQD). NAIL TO THE HORIZONTAL WALL CLEAT, PIECE MARKED ⑤, W/14-16d NAILS.
- ⑨ SPACER CLEAT, 2" X 4" X 22" (2 REQD). NAIL TO THE CAR SIDEWALL W/5-12d NAILS.
- ⑩ HOLD-DOWN CLEAT, 2" X 6" X 18" (2 REQD). NAIL TO THE CAR SIDEWALL W/5-12d NAILS.

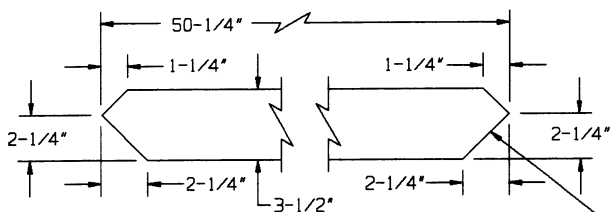


**DIAGONAL BRACE**

SEE SPECIAL NOTE 2 ABOVE.

THIS BEARING SURFACE MUST BE POSITIONED SO AS TO BE IN CONTACT WITH A CROSS CAR BRACE, PIECE MARKED ③, OR A HORIZONTAL WALL CLEAT, PIECE MARKED ⑤.

**TYPE "C" K-BRACE**

INDICATES DOOR OPENING.

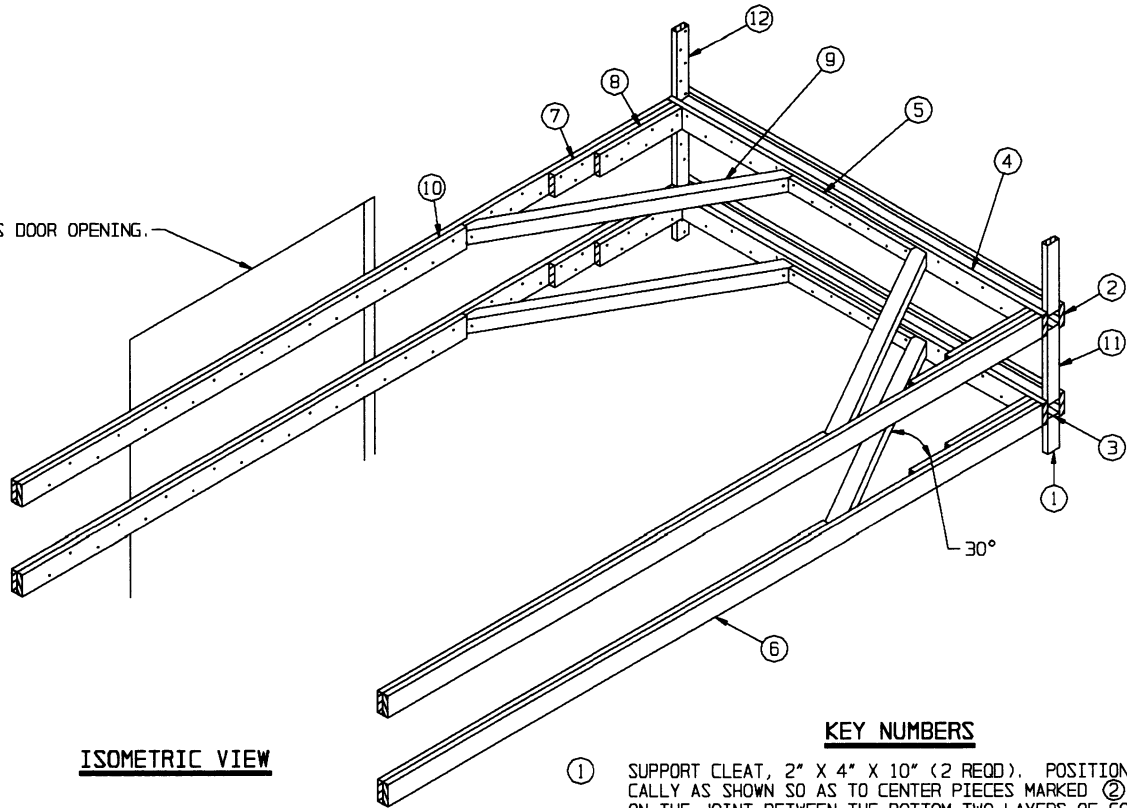


**ISOMETRIC VIEW**

**KEY NUMBERS**

**SPECIAL NOTES:**

1. THE TYPE "D" K-BRACE SHOWN IS ADEQUATE FOR RETAINING A PARTIAL TIER OF NOT MORE THAN 10 PALLET UNITS. IF THE PARTIAL TIER TO BE BRACED IS ONLY 8 PALLET UNITS, THE TYPE "C" K-BRACE DEPICTED ON PAGE 28 MAY BE USED. IF 4 PALLET UNITS ARE TO BE SHIPPED, THE TYPE "B" K-BRACE DEPICTED ON PAGE 27 MAY BE USED. IF THE PARTIAL TIER IS ONLY TWO PALLET UNITS, THE TYPE "A" K-BRACE DEPICTED ON PAGE 26 WILL BE ADEQUATE.
2. **CAUTION:** SOME CARS ARE NOT SUITED FOR THE APPLICATION OF "PARTIAL-LAYER BRACING" BECAUSE THE LENGTH OF THE PARTIAL TIER TO BE SHIPPED AND/OR THE SIZE OR CONFIGURATION OF THE CAR DOORS WILL NOT PERMIT PROPER INSTALLATION OF THE SPECIFIED K-BRACE DUNNAGE. PIECES MARKED ①, ②, ③, ④, ⑦, ⑧, ⑩, AND ⑫ MUST BE SUPPORTED AT THE SIDES OF A CAR BY A CAR SIDEWALL. IT IS ALRIGHT FOR THE ENDS OF THE DIAGONAL BRACES MARKED ⑨ TO BEAR IN FRONT OF A DOOR OPENING, HOWEVER, THE ADJACENT PIECE MARKED ⑥ MUST BE DOUBLED. LAMINATE THE SECOND PIECE TO THE FIRST W/40-16d NAILS. CLINCH THOSE NAILS WHICH PROTRUDE THRU THE HORIZONTAL WALL CLEAT WITHIN THE DOOR OPENING. NOTE THAT THE DIAGONAL BRACE WILL BE 70-1/4" LONG IN LIEU OF 71" LONG WHEN PIECE MARKED ⑥ IS DOUBLED.
3. THE CENTER CLEAT, SHOWN AS PIECE MARKED ⑤, WILL BE 28" LONG FOR AN 8'-6" WIDE CAR, 36" LONG FOR A 9'-2", AND 38" LONG FOR A 9'-4" WIDE CAR. ADJUST THE LENGTH PROPORTIONATELY FOR CARS OF OTHER WIDTHS.
4. **CAUTION:** A TYPE "D" K-BRACE MUST BE USED IN BOTH ENDS OF THE CAR; THE BRACE IS NOT DESIGNED FOR USE IN ONLY ONE END. NOTE THAT EXCEPT FOR PIECES MARKED ⑥ AND ⑩, THE QUANTITIES SPECIFIED ARE APPLICABLE ONLY FOR THE BRACE IN ONE END.

- ① SUPPORT CLEAT, 2" X 4" X 10" (2 REQD). POSITION VERTICALLY AS SHOWN SO AS TO CENTER PIECES MARKED ② AND ③ ON THE JOINT BETWEEN THE BOTTOM TWO LAYERS OF CONTAINERS ON THE UNITS. NAIL TO THE CAR SIDEWALL W/3-12d NAILS.
- ② LOAD BEARING PIECE, 2" X 6" BY CAR WIDTH (CUT-TO-FIT) (2 REQD). NAIL TO THE CROSS CAR BRACE, PIECE MARKED ③, W/1-12d NAIL EVERY 6". SEE GENERAL NOTE "M" ON PAGE 2.
- ③ CROSS CAR BRACE, 4" X 4" BY CAR WIDTH (CUT-TO-FIT) (2 REQD).
- ④ HORIZONTAL PIECE, 2" X 6" BY CAR WIDTH (CUT-TO-FIT) (2 REQD). NAIL TO THE CROSS CAR BRACE, PIECE MARKED ③, W/1-12d NAIL EVERY 6".
- ⑤ CENTER CLEAT, 2" X 4" X 36" (2 REQD). NAIL TO THE HORIZONTAL PIECE, PIECE MARKED ④, W/7-16d NAILS. SEE SPECIAL NOTE 3 AT LEFT.
- ⑥ HORIZONTAL WALL CLEAT, 2" X 6" BY CUT-TO-FIT (4 REQD). A CLEAT WILL BE OF A LENGTH AS NECESSARY TO EXTEND ACROSS AND FAR ENOUGH PAST THE DOOR OPENINGS TO CONTACT PIECE MARKED ④ OF THE K-BRACE IN THE OPPOSITE END OF THE CAR. NAIL TO THE CAR SIDEWALL W/40-12d NAILS.
- ⑦ POCKET CLEAT, 2" X 6" X 36" (4 REQD). NAIL TO THE HORIZONTAL WALL CLEAT, PIECE MARKED ⑥, W/10-16d NAILS.
- ⑧ POCKET CLEAT, 2" X 6" X 24" (4 REQD). NAIL TO THE POCKET CLEAT, PIECE MARKED ⑦, W/7-16d NAILS.
- ⑨ DIAGONAL BRACE, 4" X 4" X 71" (4 REQD). SEE THE DETAIL BELOW FOR BEVEL-CUTS REQUIRED. TOENAIL TO THE HORIZONTAL PIECE, PIECE MARKED ④, AND TO THE HORIZONTAL WALL CLEAT, PIECE MARKED ⑥, W/1-60d NAIL AT EACH END.
- ⑩ BACK-UP CLEAT, 2" X 6" BY CUT-TO-FIT (4 REQD). A CLEAT WILL BE OF A LENGTH AS NECESSARY TO EXTEND TO CONTACT THE DIAGONAL BRACE, PIECE MARKED ⑨, IN THE OPPOSITE END OF THE CAR. NAIL TO THE HORIZONTAL WALL CLEAT, PIECE MARKED ⑥, W/18-16d NAILS. CLINCH THOSE NAILS WHICH PROTRUDE THRU THE HORIZONTAL WALL CLEAT WITHIN THE DOOR OPENING, IF APPLICABLE.
- ⑪ SPACER CLEAT, 2" X 4" X " (2 REQD). NAIL TO THE CAR SIDEWALL W/5-12d NAILS.
- ⑫ HOLD-DOWN CLEAT, 2" X 4" X 18" (2 REQD). NAIL TO THE CAR SIDEWALL W/5-12d NAILS.

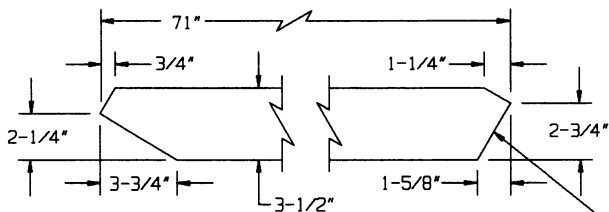


**DIAGONAL BRACE**

SEE SPECIAL NOTE 2 ABOVE.

THIS BEARING SURFACE MUST BE POSITIONED SO AS TO BE IN CONTACT WITH A CROSS CAR BRACE, PIECE MARKED ③.

**TYPE "D" K-BRACE**

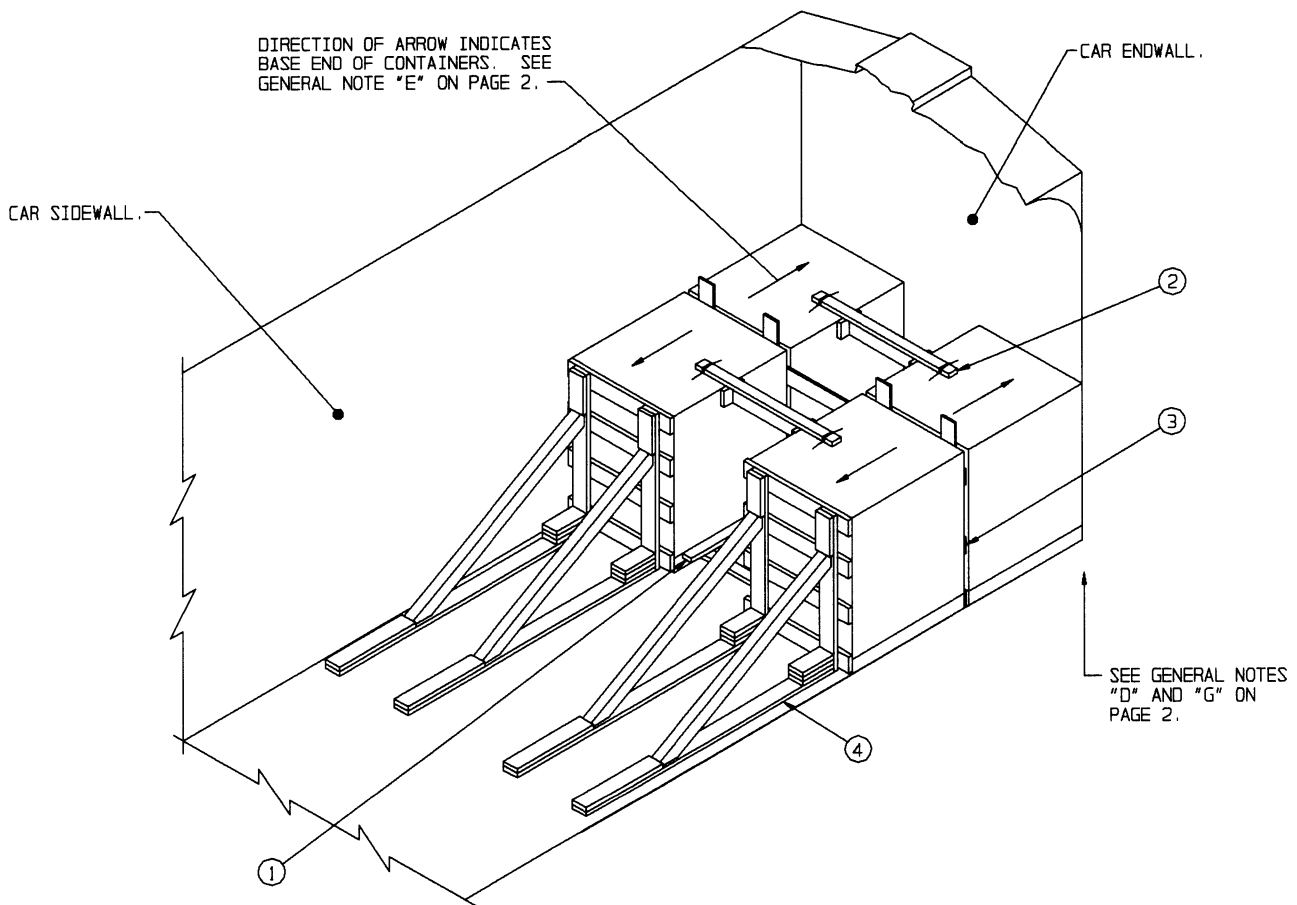


**ISOMETRIC VIEW**

**KEY NUMBERS**


- ① ANTI-SWAY BRACE (2 REQD). SEE THE DETAIL ON PAGE 12. INSTALL BETWEEN LATERALLY ADJACENT PALLET UNITS. SEE GENERAL NOTES "M" AND "N" ON PAGE 2.
- ② TOP-OF-LOAD ANTI-SWAY BRACE (2 REQD). SEE THE DETAIL ON PAGE 12. WIRE TIE TO THE PALLET UNITIZING STRAPS WITH NO. 14 GAGE WIRE AS SHOWN IN THE "TIE WIRE APPLICATION" DETAIL ON PAGE 39.
- ③ SEPARATOR GATE (1 REQD). SEE THE "SEPARATOR GATE A" DETAIL ON PAGE 13. POSITION WITH THE HORIZONTAL PIECES AGAINST THE ALREADY LOADED UNITS.
- ④ KNEE BRACE ASSEMBLY (2 REQD). SEE THE DETAIL ON PAGE 31.

**SPECIAL NOTES:**

- 1. A 9'-2" WIDE WOOD-LINED CONVENTIONAL TYPE BOX CAR HAVING A WOOD OR NAILABLE METAL FLOOR IS SHOWN. CARS OF OTHER WIDTHS AND CARS HAVING METAL LININGS CAN BE USED.
- 2. THE LOAD SHOWN DEPICTING THE KNEE BRACE METHOD OF PARTIAL-LAYER BRACING IS TYPICAL. THE QUANTITY MAY BE ADJUSTED TO SUIT, PROVIDED THE LIMITATIONS OF THE KNEE BRACE AS SET FORTH IN SPECIAL NOTE 3 ARE NOT EXCEEDED.
- 3. A KNEE BRACE ASSEMBLY WILL BE USED FOR EACH ROW OF PALLET UNITS. ONE KNEE BRACE ASSEMBLY IS ADEQUATE FOR RETAINING A MAXIMUM LCL LOAD OF NOT MORE THAN 8,500 POUNDS OR THREE PALLET UNITS.

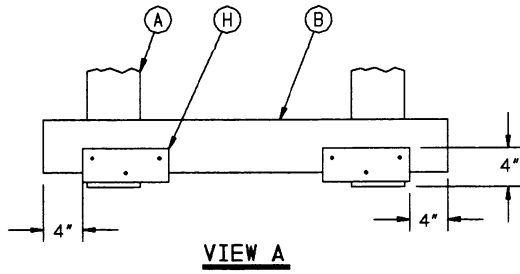

**VIEW A**

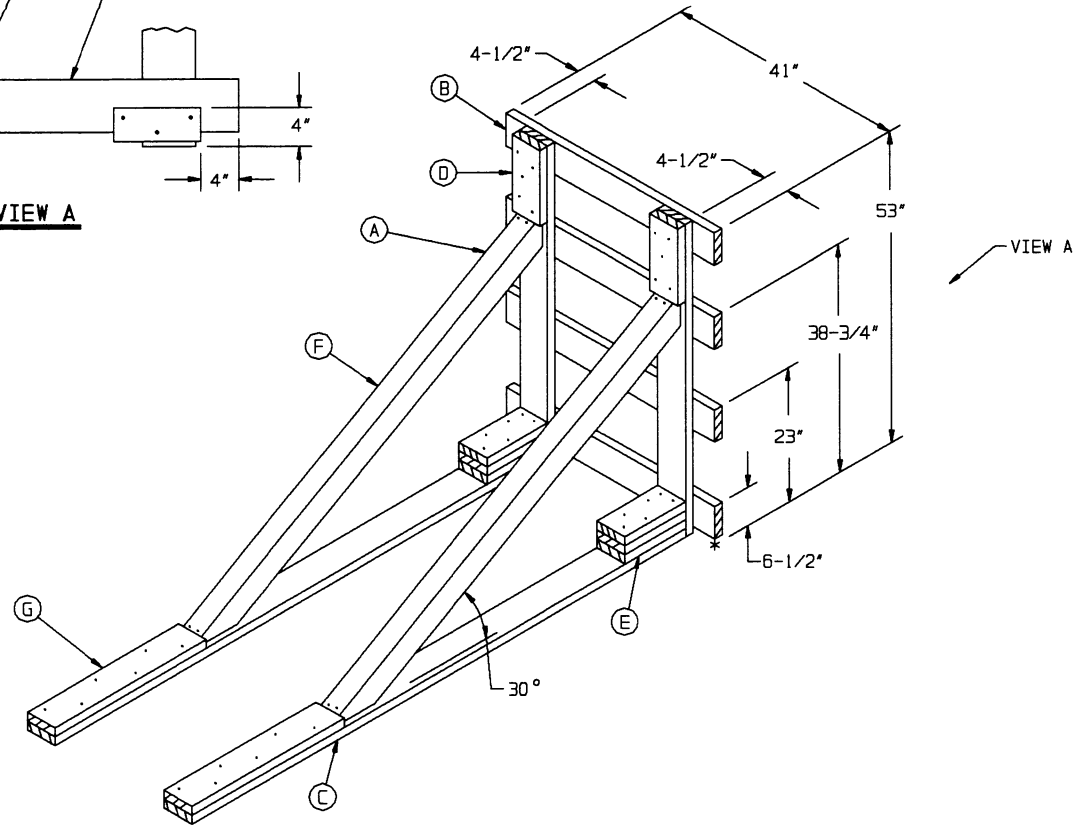


**VIEW A**

**KNEE BRACE ASSEMBLY**

**KEY LETTERS**


- (A) VERTICAL PIECE, 2" X 6" X 53" (2 REQD). NAIL TO A FLOOR CLEAT, PIECE MARKED (C), W/3-16d NAILS.
- (B) HORIZONTAL PIECE, 2" X 6" X 41" (4 REQD). NAIL TO THE VERTICAL PIECES, PIECE MARKED (A), W/3-10d NAILS AT EACH JOINT. SEE GENERAL NOTE "M" ON PAGE 2.
- (C) FLOOR CLEAT, 2" X 6" X 8'-2" (2 REQD). NAIL TO THE CAR FLOOR W/1-16d NAIL EVERY 8". SEE GENERAL NOTE "R" ON PAGE 3.
- (D) HOLD-DOWN CLEAT, 2" X 6" X 12" (2 REQD). NAIL TO A VERTICAL PIECE, PIECE MARKED (A), W/5-10d NAILS.
- (E) POCKET CLEAT, 2" X 6" X 12" (TRIPLED) (2 REQD). NAIL THE FIRST PIECE TO THE FLOOR CLEAT, PIECE MARKED (C), W/4-16d NAILS. NAIL THE SECOND AND THIRDO PIECES IN A LIKE MANNER AND TOENAIL THE THIRD PIECE TO THE VERTICAL PIECE, PIECE MARKED (A), W/2-16d NAILS.
- (F) BRACE, 4" X 4" X 6'-6" (2 REQD). SEE THE DETAIL AT LEFT FOR BEVEL-CUTS REQUIRED. TOENAIL TO THE VERTICAL PIECE AND TO THE FLOOR CLEAT, PIECES MARKED (A) AND (C), W/2-16d NAILS.
- (G) BACK-UP CLEAT, 2" X 6" X 30" (2 REQD). NAIL TO THE FLOOR CLEAT, PIECE MARKED (C), W/6-40d NAILS.
- (H) HOLD-DOWN CLEAT, 2" X 4" X 9" (DOUBLED) (2 REQD). NAIL THE FIRST PIECE TO A HORIZONTAL PIECE W/3-10d NAILS. NAIL THE SECOND PIECE TO THE FIRST IN A LIKE MANNER. SEE "VIEW A" DETAIL ABOVE FOR LOCATION DIMENSIONS.

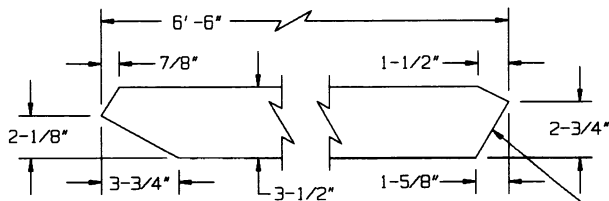

**BRACE**

4" X 4" MATERIAL

THE BRACE MUST BE INSTALLED SO THAT THIS BEARING SURFACE WILL BE IN CONTACT WITH THE VERTICAL PIECE MARKED (A).

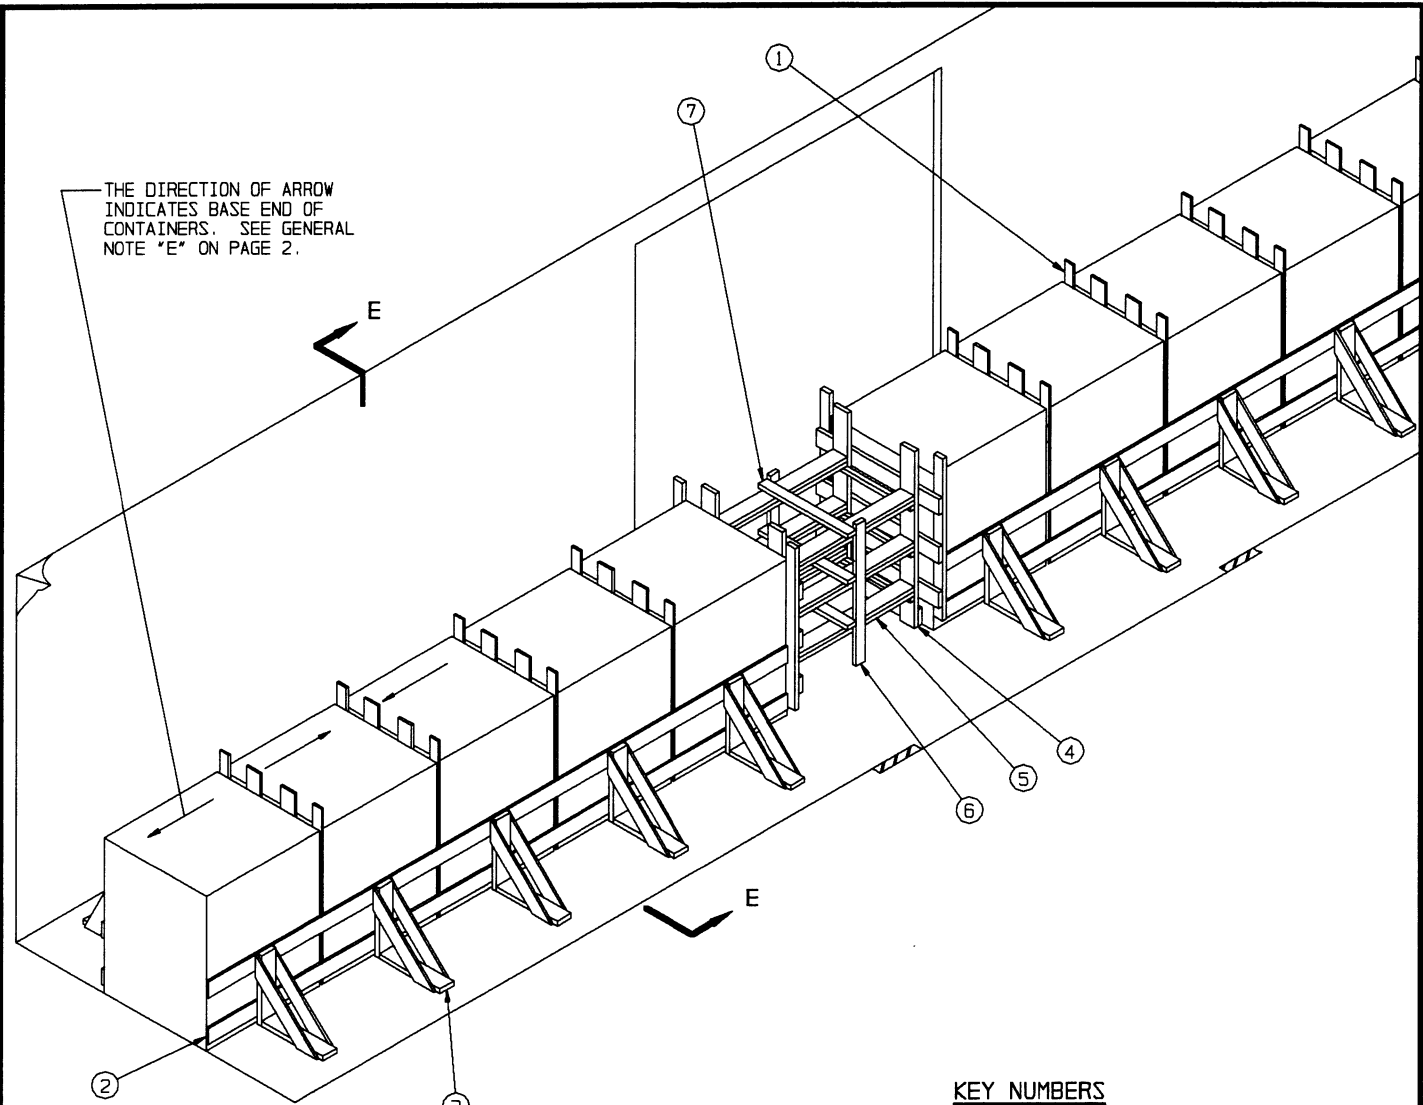


THE DIRECTION OF ARROW INDICATES BASE END OF CONTAINERS. SEE GENERAL NOTE "E" ON PAGE 2.

**ISOMETRIC VIEW**

SEE GENERAL NOTES "D" AND "G" ON PAGE 2.


**KEY NUMBERS**

- ① SEPARATOR GATE (10 REQD). SEE THE "SEPARATOR GATE D" DETAIL ON PAGE 17. POSITION WITH THE HORIZONTAL PIECES AGAINST THE ALREADY LOADED UNITS. SEE GENERAL NOTES "M" AND "N" ON PAGE 2.
- ② HORIZONTAL PIECE, 1" X 6" BY A LENGTH TO SUIT (8 REQD). NAIL TO THE VERTICAL PIECES OF THE LCL BRACES W/3-6d NAILS AT EACH JOINT PRIOR TO PLACEMENT AGAINST THE LADING. SEE THE "LCL BRACE" DETAIL ON PAGE 34 FOR HEIGHT LOCATION GUIDANCE.
- ③ LCL BRACE (24 REQD). SEE THE DETAIL ON PAGE 34 AND SPECIAL NOTE 3 ON PAGE 33. POSITION AS SHOWN AND NAIL TO THE CAR FLOOR W/7-16d NAILS. SEE GENERAL NOTE "R" ON PAGE 3.
- ④ CENTER GATE (2 REQD). SEE THE "CENTER GATE C" DETAIL ON PAGE 33.
- ⑤ STRUT, 2" X 6" BY CUT-TO-FIT (REF: 51") (DOUBLED) (6 REQD). LAMINATE W/1-10d NAIL EVERY 6" AND TOENAIL THE TOP PIECE TO PIECES MARKED ④ W/2-16d NAILS AT EACH END. SEE GENERAL NOTE "T" ON PAGE 3 AND SPECIAL NOTE 2 ON PAGE 33.
- ⑥ VERTICAL STRUT BRACING, 2" X 4" BY LENGTH TO SUIT (2 REQD). NAIL TO THE STRUTS W/2-10d NAILS AT EACH JOINT.
- ⑦ HORIZONTAL STRUT BRACING, 2" X 4" BY LENGTH TO SUIT (3 REQD). NAIL TO THE STRUTS W/3-10d NAILS AT EACH JOINT.

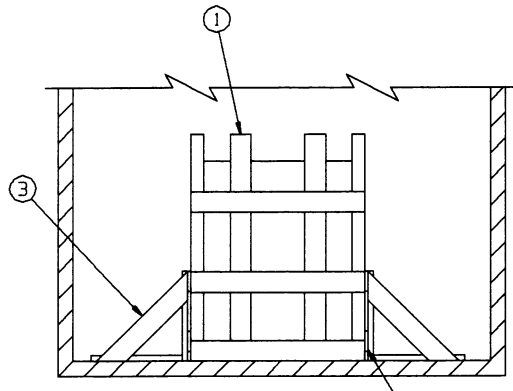

**SECTION E-E**



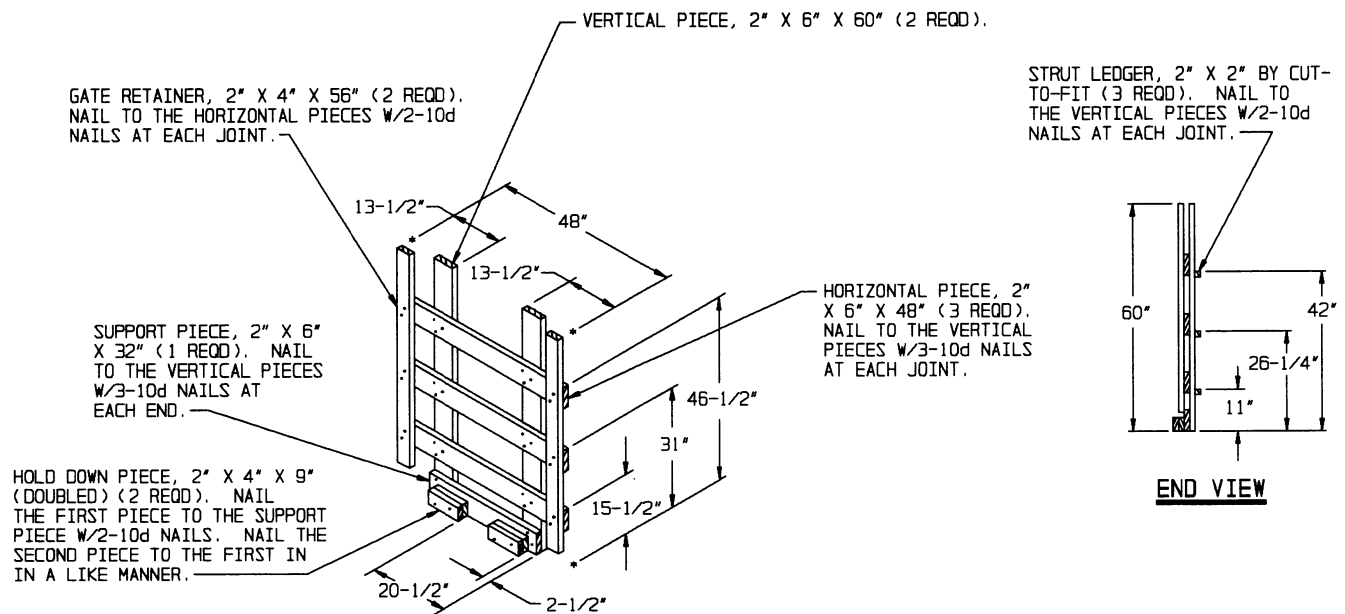

**CENTER GATE C**

THIS GATE IS TO BE USED WITH THE 1-WIDE LOAD ON PAGE 32.

**SPECIAL NOTES:**

1. A 50'-6" LONG BY 9'-2" WIDE CONVENTIONAL TYPE BOX CAR IS SHOWN. CARS OF OTHER WIDTHS AND LENGTHS CAN BE USED.
2. A 1-WIDE LOAD IN A 50'-6" LONG CAR IS SHOWN AS TYPICAL. THE DEPICTED PROCEDURES ARE ALSO APPLICABLE FOR A 10-UNIT LOAD IN A 40'-6" LONG CAR OR A 14-UNIT LOAD IN A 60'-8" LONG CAR.
3. ONE LCL BRACE WILL BE USED AT EACH SIDE OF EACH PALLET UNIT. THE BRACES WILL BE LOCATED NEAR THE CENTER OF THE UNIT WIDTH, WITH SLIGHT ADJUSTMENTS AS NECESSARY TO ALIGN A BRACE WITH THE CENTER COLLAR OF THE CONTAINER.
4. THE BILL OF MATERIAL AND LOAD AS SHOWN ARE BASED ON THE DEPICTED LOAD AND THEREFORE ONLY TYPICAL.


BILL OF MATERIAL		
LUMBER	LINEAR FEET	BOARD FEET
1" X 4"	100	33
1" X 6"	500	250
2" X 2"	16	5
2" X 4"	41	27
2" X 6"	193	193
NAILS	NO. REQD	POUNDS
6d (2")	312	2
8d (2-1/2")	288	3
10d (3")	186	2
16d (3-1/2")	648	14

**LOAD AS SHOWN**

ITEM	QUANTITY	WEIGHT (APPROX)
PALLET UNIT	11	26,884 LBS
DUNNAGE		1,037 LBS
<b>TOTAL WEIGHT</b>		<b>27,921 LBS (APPROX)</b>

THE DIRECTION OF ARROW INDICATES BASE END OF CONTAINERS. SEE GENERAL NOTE "E" ON PAGE 2.

HORIZONTAL PIECE, 1" X 6" X 44.0" (2 REQD). NAIL TO THE VERTICAL PIECES OF THE LCL BRACES W/3-6d NAILS AT EACH JOINT PRIOR TO PLACEMENT AGAINST LADING.

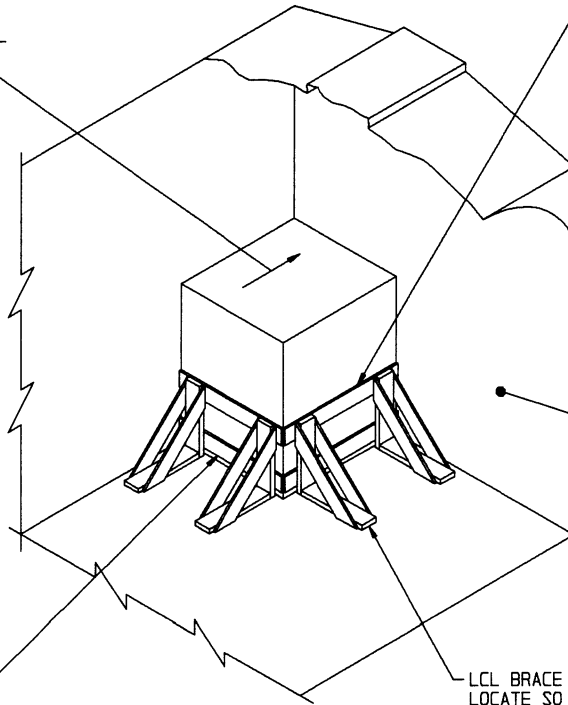

SEE GENERAL NOTES "D" AND "G" ON PAGE 2.

HORIZONTAL PIECE, 1" X 6" X 40" (2 REQD). NAIL TO THE VERTICAL PIECES OF THE LCL BRACES W/3-6d NAILS AT EACH JOINT PRIOR TO PLACEMENT AGAINST LADING.

LCL BRACE (4 REQD). SEE THE DETAIL BELOW. LOCATE SO AS TO BE CENTERED ON THE JOINTS OF THE CONTAINER OR ALIGNED WITH THE BELL OR COLLAR. NAIL TO THE CAR FLOOR W/7-16d NAILS. SEE GENERAL NOTES "M" ON PAGE 2 AND "R" ON PAGE 3.

**ISOMETRIC VIEW**


**SPECIAL NOTES:**

1. A 9'-6" WIDE WOOD-LINED CONVENTIONAL TYPE BOX CAR HAVING A WOOD OR NAILABLE METAL FLOOR IS SHOWN. CARS OF OTHER WIDTHS CAN BE USED.
2. THE 1-UNIT LOAD SHOWN ABOVE IS TYPICAL. OTHER QUANTITIES CAN BE SHIPPED AS LONG AS THE CAPACITY OF THE BRACES IS NOT EXCEEDED. SEE SPECIAL NOTE 3 BELOW.
3. EACH LCL BRACE AS APPLIED FOR LONGITUDINAL BRACING WILL RETAIN 2,000 POUNDS OF LADING. EACH LCL BRACE AS APPLIED FOR LATERAL BRACING WILL SUPPORT 8,000 POUNDS OF LADING. A MINIMUM OF TWO BRACES MUST BE USED FOR LONGITUDINAL BRACING.


VERTICAL PIECE, 2" X 6" X 24" (MAXIMUM) (1 REQD). NAIL TO THE BACK-UP CLEAT W/2-16d NAILS.

ANGLE BRACE, 1" X 6" BY CUT-TO-FIT (2 REQD). NAIL TO THE VERTICAL PIECE AND TO THE BACK-UP CLEAT W/3-8d NAILS AT EACH END.

BACK-UP CLEAT, 2" X 6" X 24" (MINIMUM) (1 REQD).

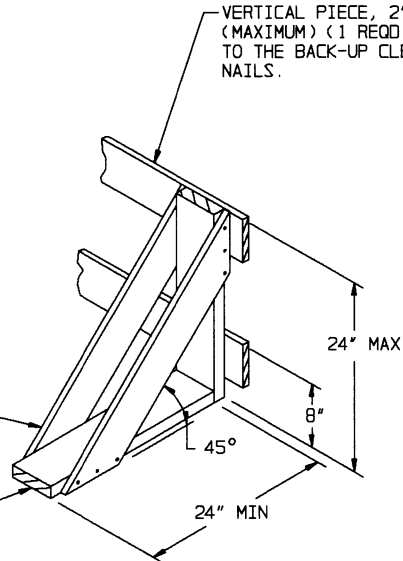


**LCL BRACE**

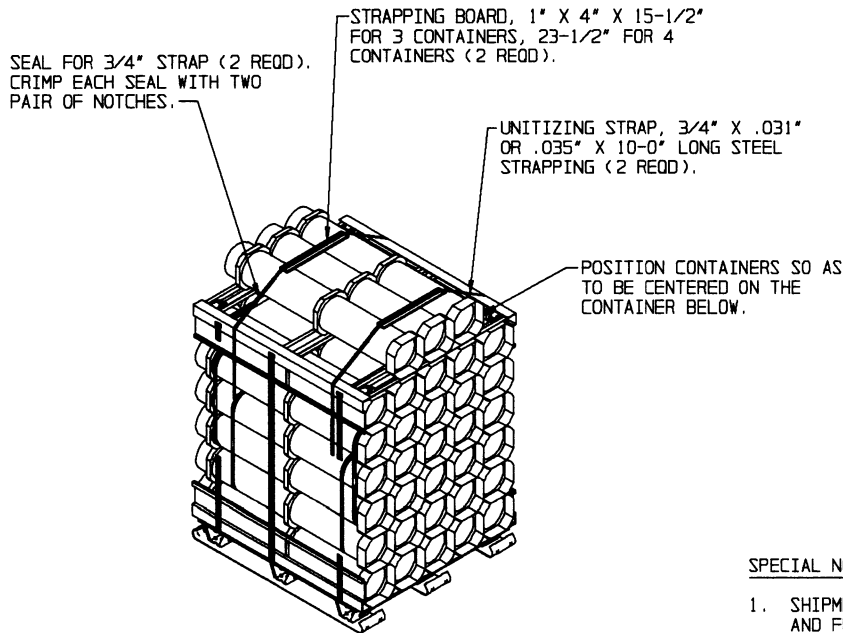

**SECUREMENT OF THREE CONTAINERS**


**SPECIAL NOTES:**

1. SHIPMENTS OF CARTRIDGES SHOULD CONSIST OF FULL-HEIGHT AND FULL-LAYER UNITS TO THE MAXIMUM EXTENT POSSIBLE. HOWEVER, THE END OF A LOT, OR THE QUANTITY OF ITEMS NEEDED TO FILL A REQUISITION, MAY NECESSITATE THE SHIPMENT OF ONE OR MORE LEFTOVER CONTAINERS. LEFTOVER CONTAINERS ARE DESCRIBED AS A QUANTITY OF CONTAINERS WHICH IS INSUFFICIENT TO FORM A FULL-LAYERED PARTIAL UNIT FOR SHIPMENT WITHIN A LAYER AS SHOWN ON PAGE 21.
2. SHIPMENT OF LEFTOVER CONTAINERS IS APPLICABLE FOR CONUS AND OCONUS RAILROAD SHIPMENTS FROM DEPOT TO DEPOT OR FROM DEPOT TO POSTS, CAMPS AND STATIONS, OR, UPON APPROVAL FROM HIGHER HEADQUARTERS, FOR SHIPMENTS FROM LOAD, ASSEMBLY AND PACK PLANTS TO DEPOTS. CAUTION: A LOAD CONTAINING LEFTOVER CONTAINERS IN AN AMOUNT WHICH IS LESS THAN A FULL LAYER, AND SECURED TO THE TOP OF A FULL OR PARTIAL UNIT, MUST NOT BE DESTINED FOR SHIPMENT OVERSEAS BY WATER CARRIER.
3. OBVIOUSLY, A PALLET UNIT WITH ONE OR MORE CONTAINERS STRAPPED TO THE TOP MUST BE POSITIONED IN THE TOP LAYER OF A LOAD. THE PREFERRED LOCATION WOULD BE NEAR THE CENTER AREA OF A CAR IF A FULL LOAD IS BEING SHIPPED.
4. THE PROCEDURES ON THIS PAGE ARE APPLICABLE FOR THE SHIPMENT OF LEFTOVER CONTAINERS IN ANY OF THE LOADS DEPICTED HEREIN.

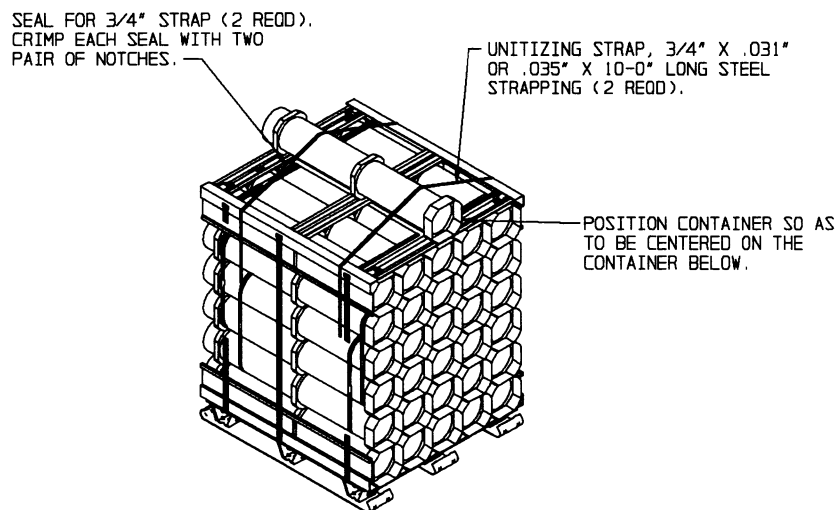

**SECUREMENT OF ONE CONTAINER**

1/2" PLYWOOD, 4' X 8' SHEET.  
 NAIL TO THE TIE PIECES W/3  
 APPLICABLY SIZED NAILS  
 AND CLINCH. NOTE THAT  
 THE APPLICABLE SEPARATOR GATE  
 MAY BE USED IN LIEU OF  
 PLYWOOD. POSITION WITH  
 THE VERTICAL PIECES AGAINST  
 THE CAR ENDWALL.

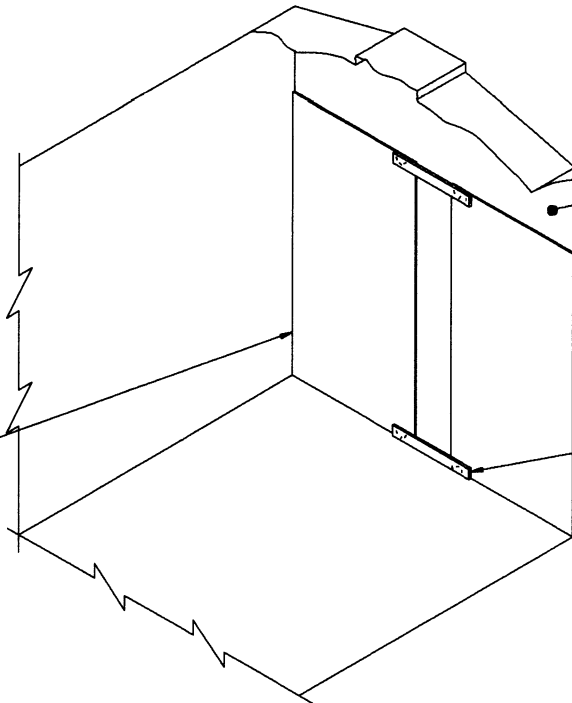

INDICATES CAR ENDWALL.


TIE PIECE, 1" X 4" BY  
 DISTANCE BETWEEN PLYWOOD  
 PLUS 8" (2 REQD).

**ENDWALL LINING**

THIS VIEW DEPICTS LINING REQUIRED FOR A LOAD  
 IN A CAR EQUIPPED WITH STEEL ENDWALL.

INDICATES CAR SIDEWALL.

1/4" MINIMUM PLYWOOD, 1/8" MINIMUM  
 HARDBOARD OR .060" MINIMUM THICK  
 SOLID WALL FIBERBOARD. NAIL  
 PLYWOOD OR HARDBOARD TO TIE PIECE  
 W/1 APPLICABLY SIZED NAIL EVERY 8".  
 STAPLE FIBERBOARD TO TIE PIECE  
 W/1 STAPLE EVERY 6". NOTE THAT  
 SEPARATOR GATES, OR SIMILARY  
 POSITIONED VERTICAL 1" X 6"  
 LUMBER, MAY BE USED PROVIDING  
 THEY ARE TIED TOGETHER TO  
 PREVENT DISLODGEEMENT.

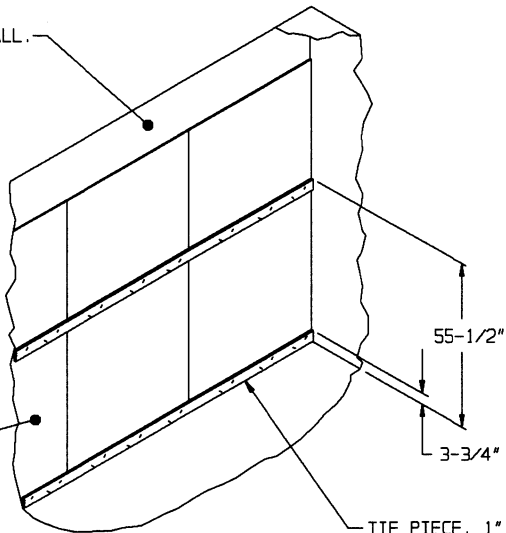


55-1/2"

3-3/4"

TIE PIECE, 1" X 4"  
 BY RANDOM LENGTH  
 (2 REQD).


**SIDEWALL LINING**

THIS VIEW DEPICTS LINING REQUIRED FOR A CAR EQUIPPED WITH A STEEL  
 SIDEWALL. NOTE THAT IF THE CAR IS EQUIPPED WITH A STEEL FACED  
 PLUG DOOR, THE SPECIAL LINING WILL ALSO BE REQUIRED IN THE  
 DOORWAY AREA IF THE SPECIFIED DOORWAY PROTECTION DOES NOT SUFFICE.

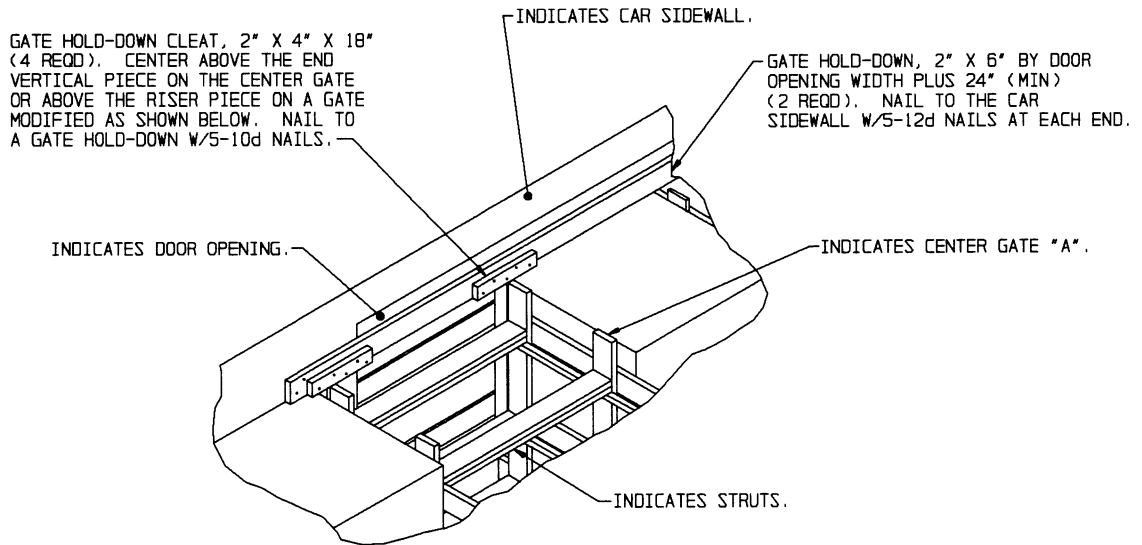


**ALTERNATIVE GATE HOLD-DOWN**

THIS VIEW DEPICTS AN ALTERNATIVE METHOD OF CENTER GATE HOLD-DOWN WHICH CAN BE USED IF DESIRED, PROVIDING THE CAR HAS NAILABLE SIDEWALLS. THIS METHOD MAY BE APPLIED IN LIEU OF USING THE GATE HOLD-DOWN PIECES WHICH ARE PART OF A CENTER GATE. NOTE: FOR A GATE NOT LOCATED IN OR NEAR THE DOORWAY AREA, THE GATE HOLD-DOWN CLEAT MAY BE DOUBLED AND NAILED TO THE CAR SIDEWALL TO PROVIDE A HOLD-DOWN.

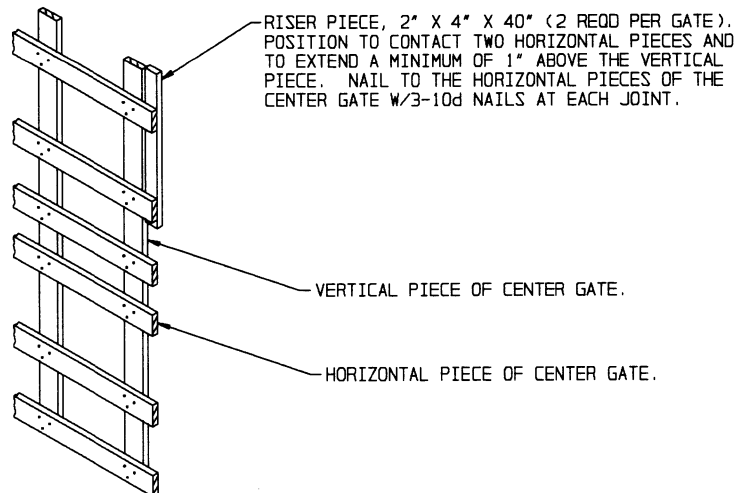


**CENTER GATE MODIFICATION**

THE MODIFICATION PROCEDURES SHOWN IN THIS VIEW ARE APPLICABLE FOR CENTER GATE "A" OR "B" WHICH HAS THE VERTICAL PIECES INSET FROM THE END OF THE HORIZONTAL PIECES AS SHOWN ABOVE. THE RISER PIECE WILL PROVIDE A MEANS FOR CONTACTING THE GATE WITH THE GATE HOLD-DOWN.

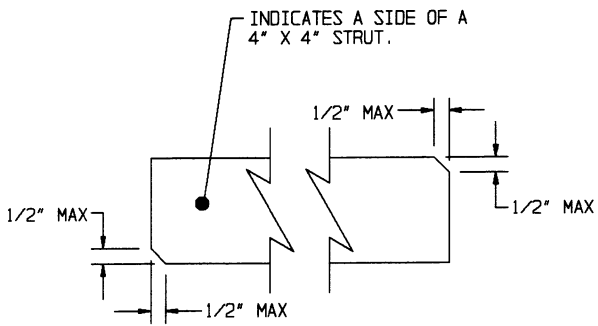


**BEVEL-CUT**

BEVEL CUTTING THE STRUTS AS SPECIFIED WILL FACILITATE INSTALLING THE STRUTS WITH A "DRIVE FIT". CAUTION: DO NOT BEVEL A CORNER MORE THAN ONE-HALF INCH (1/2").

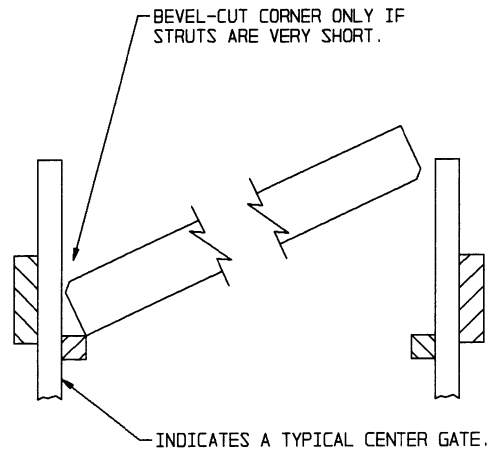


**STRUT INSTALLATION**

SEE GENERAL NOTE "U" ON PAGE 3 FOR ADDITIONAL STRUT INSTALLATION GUIDANCE.



**STRAP JOINT A**


METHOD OF SECURING A STRAP JOINT WHEN USING A NOTCH-TYPE SEALER.

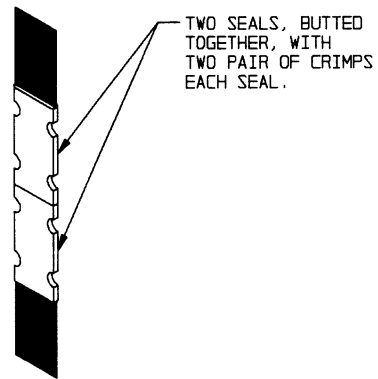

**STRAP JOINT B**

METHOD OF SECURING A STRAP JOINT WHEN USING A CRIMP-TYPE SEALER.

**END-OVER-END LAP JOINT DETAILS**

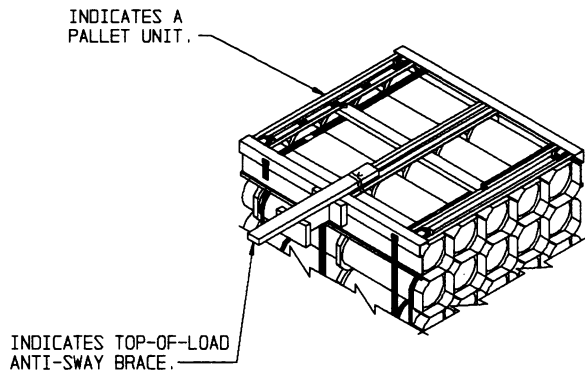


**TIE WIRE APPLICATION**


USE NO. 14 GAGE WIRE BY A LENGTH TO SUIT. FORM TWO LOOPS AROUND TOP-OF-LOAD ANTI-SWAY BRACE SUPPORT PIECE AND TWIST TO PREVENT DISPLACEMENT. THREAD EACH END OF WIRE UNDER AND AROUND THE CENTER UNITIZING STRAP ON THE UNIT AND TWIST WIRE TO SELF AS SHOWN.

**NOTE:**

IF A BOX CAR TO BE LOADED HAS BOWED ENDWALLS WHICH ARE BOWED OUTWARD MORE THAN TWO INCHES, EITHER FROM SIDE TO SIDE OR FROM FLOOR TO ROOF, AN END-OF-CAR BULKHEAD MUST BE INSTALLED TO PROVIDE A "SQUARED OFF" SURFACE FOR THE LOAD AT THE END OF THE CAR. THE BULKHEAD IS APPLICABLE FOR USE AT THE END OF A LOAD IN A CONVENTIONAL BOX CAR OR IN A CAR EQUIPPED WITH LOAD DIVIDER BULKHEADS, OR AT THE END OF A CAR EQUIPPED WITH MECHANICAL BRACING DEVICES, IF DESIRED, IN LIEU OF USING CROSS MEMBERS. THE BULKHEAD MAY BE FABRICATED FROM A CENTER GATE. NOTE THAT THE GATE MUST BE MODIFIED BY OMITTING THE 2" X 2" STRUT LEDGERS AND THE GATE HOLD DOWN PIECES. REFER TO PAGE 14 FOR THE CENTER GATE "A" DETAIL.

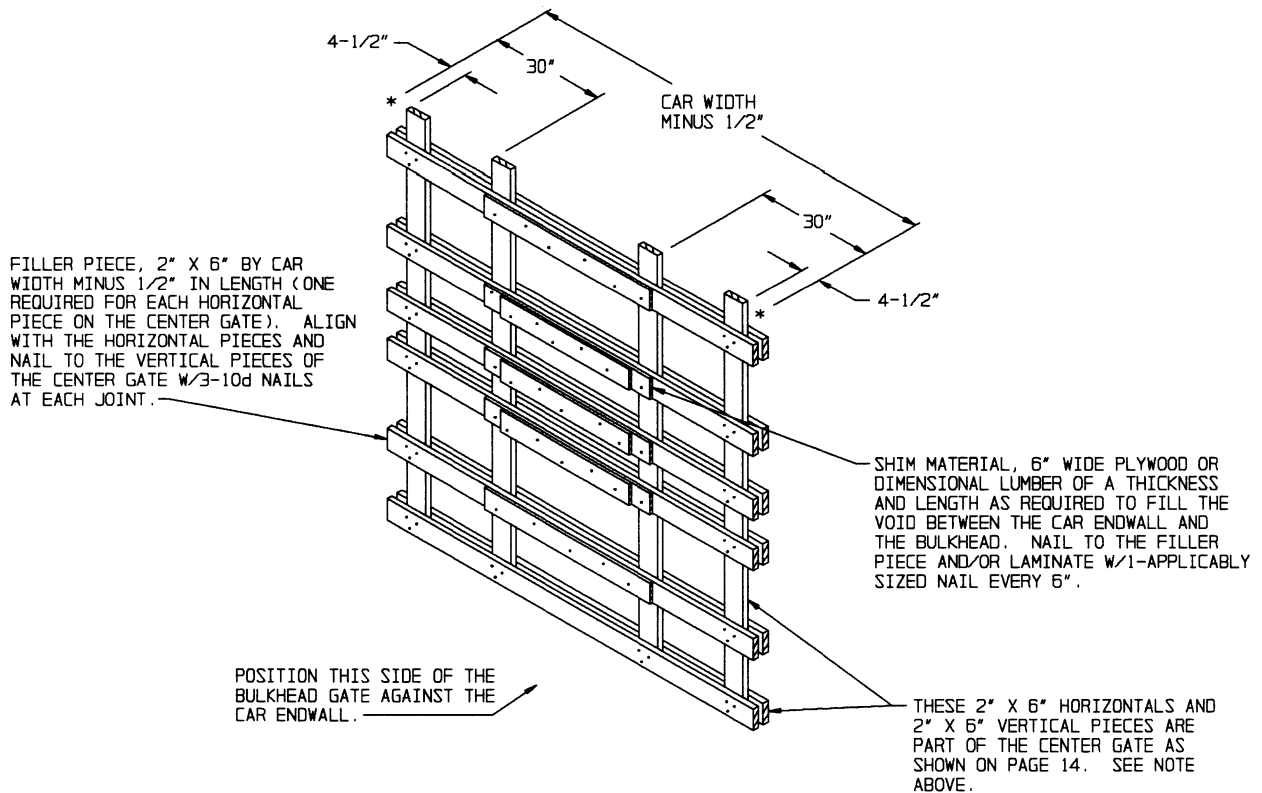

**END-OF-CAR BULKHEAD**

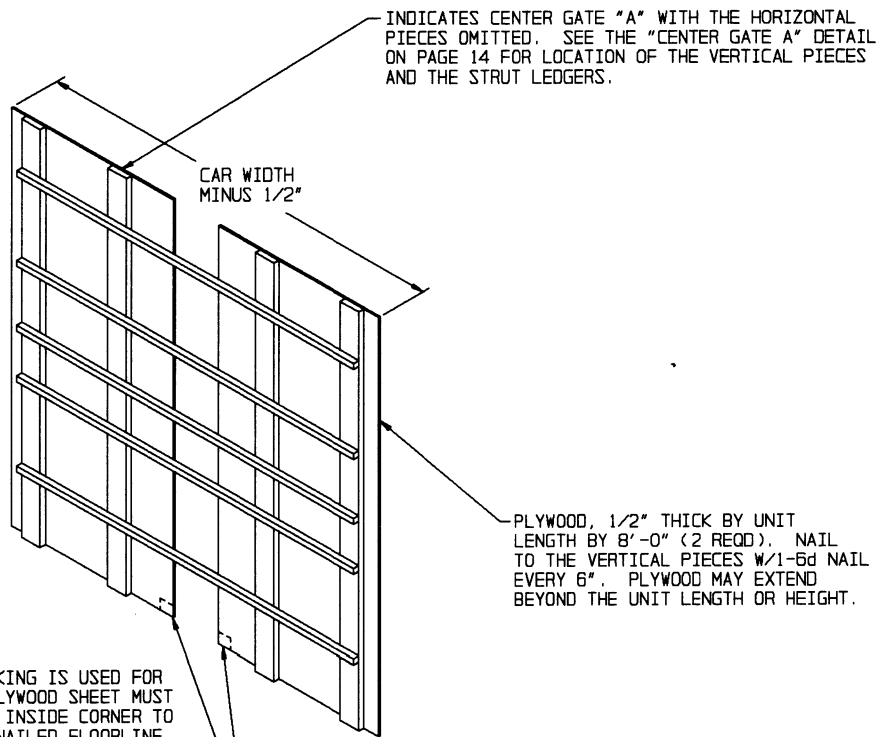


INDICATES CENTER GATE "A" WITH THE HORIZONTAL PIECES OMITTED. SEE THE "CENTER GATE A" DETAIL ON PAGE 14 FOR LOCATION OF THE VERTICAL PIECES AND THE STRUT LEDGERS.

CAR WIDTH  
MINUS 1/2"

PLYWOOD, 1/2" THICK BY UNIT LENGTH BY 8'-0" (2 REQD). NAIL TO THE VERTICAL PIECES W/1-6d NAIL EVERY 6". PLYWOOD MAY EXTEND BEYOND THE UNIT LENGTH OR HEIGHT.

WHEN NAILED FLOORLINE BLOCKING IS USED FOR DOORWAY PROTECTION, EACH PLYWOOD SHEET MUST HAVE A CUTOUT AT THE LOWER INSIDE CORNER TO PROVIDE CLEARANCE FOR THE NAILED FLOORLINE BLOCKING DURING THE NORMAL SHIFTING OF THE LOAD. THE CUTOUT MUST BE 3-1/2' HIGH AND OF A SUFFICIENT WIDTH SO THAT THE REMAINING PLYWOOD AT THE FLOOR IS 40".

**PLYWOOD CENTER GATE ALTERNATIVE**

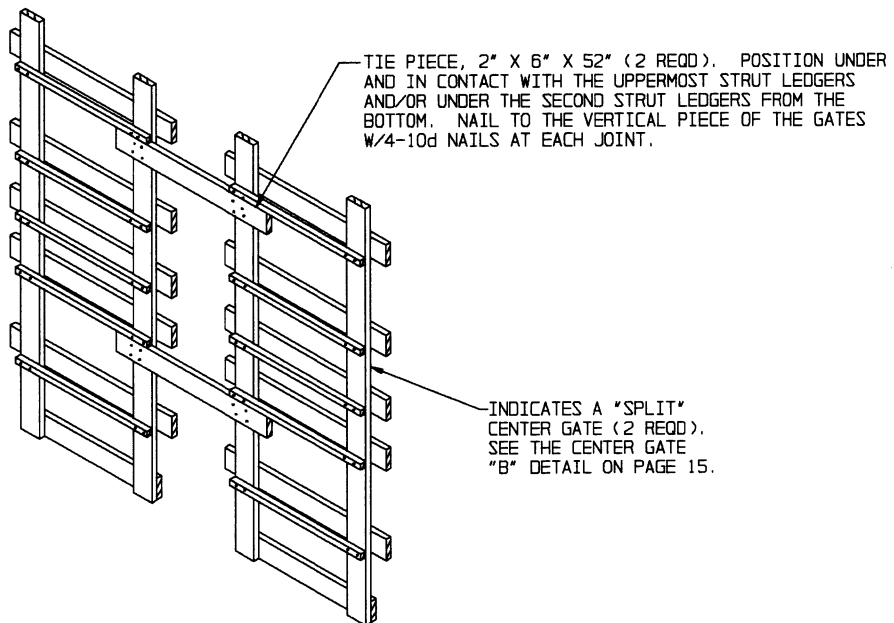

TIE PIECE, 2" X 6" X 52" (2 REQD). POSITION UNDER AND IN CONTACT WITH THE UPPERMOST STRUT LEDGERS AND/OR UNDER THE SECOND STRUT LEDGERS FROM THE BOTTOM. NAIL TO THE VERTICAL PIECE OF THE GATES W/4-10d NAILS AT EACH JOINT.

INDICATES A "SPLIT" CENTER GATE (2 REQD). SEE THE CENTER GATE "B" DETAIL ON PAGE 15.

**TIE PIECE APPLICATION**


NOTE THAT THE TIE PIECES SHOULD BE APPLIED AFTER THE GATES AND STRUTS HAVE BEEN INSTALLED.



IF THE SPACE WILL BE MORE THAN 9" MAXIMUM, REFER TO THE "ALTERNATIVE DOORWAY PROTECTION A-2" VIEW BELOW FOR GUIDANCE. SEE "NOTE ●" AT THE RIGHT.

NOTE ●:

THE TOLERANCE DIMENSION (6" MIN, 9" MAX) IS ALLOWED TO PROVIDE FOR CLEARANCE DURING THE NORMAL LONGITUDINAL SHIFTING OF A LOAD IN TRANSIT.


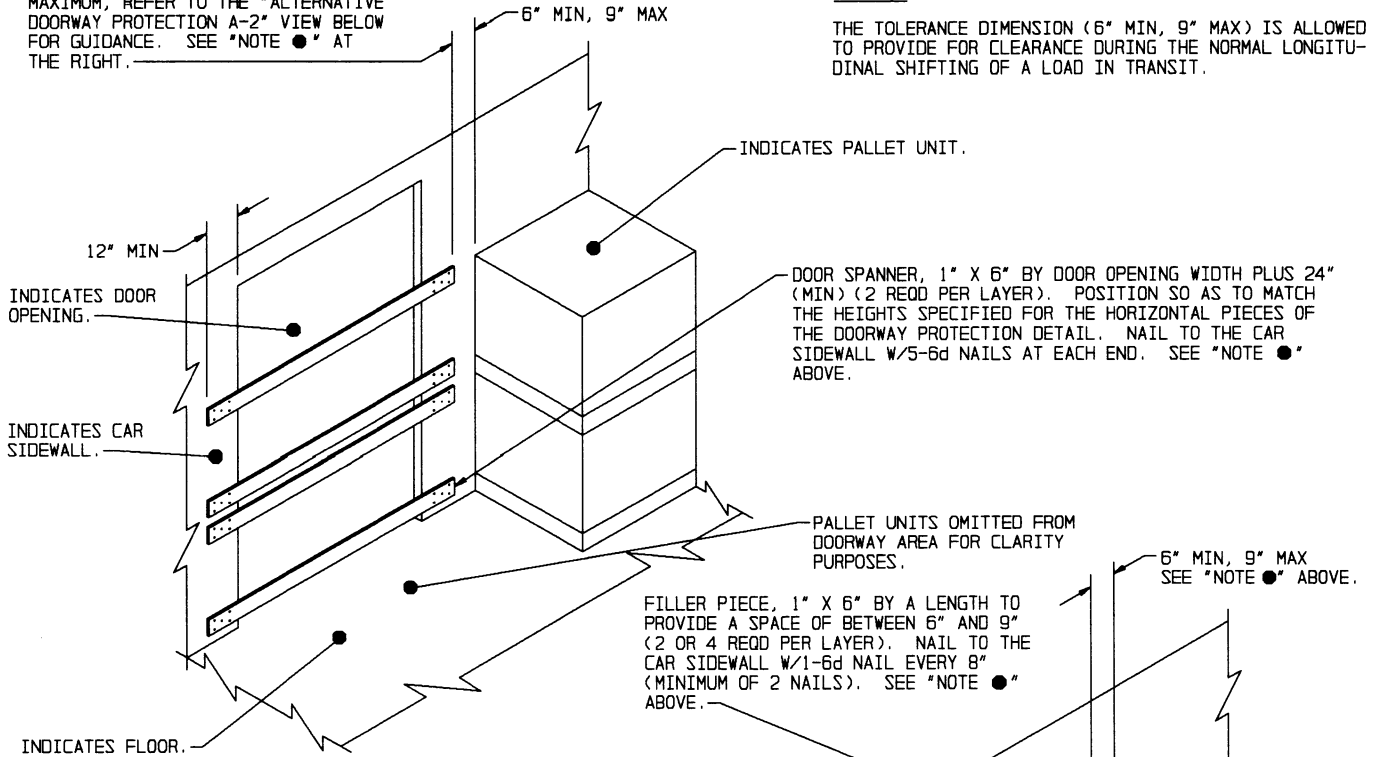


**ALTERNATIVE DOORWAY PROTECTION A-1**

THIS METHOD OF DOORWAY PROTECTION IS FOR USE IN CARS HAVING NAILABLE SIDEWALLS AND EQUIPPED WITH CONVENTIONAL SLIDING DOORS, AND IS APPLICABLE ONLY FOR THE SIDE OPPOSITE THE LOADING SIDE OF THE CAR. THE METHOD CAN ALSO BE USED IN CARS EQUIPPED WITH PLUG DOORS; HOWEVER, A METHOD OTHER THAN THE "ALTERNATIVE DOORWAY PROTECTION A-3" PROCEDURES BELOW MUST BE USED ON THE LOADING SIDE OF THE CAR. THE NAILED-DOWN BLOCKING AND STEEL STRAPPING METHOD AS SHOWN IN THE LOAD ON PAGE 10 MAY BE USED.

DOOR SPANNER, 1" X 6" BY DOOR OPENING WIDTH PLUS 24" (2 REOD PER LAYER). POSITION SO AS TO MATCH THE HEIGHTS SPECIFIED FOR THE HORIZONTAL PIECES OF THE APPLICABLE DOORWAY PROTECTION DETAIL. NAIL TO THE CAR SIDEWALL W/5-6d NAILS AT EACH END. SEE "NOTE ●" ABOVE.

DOOR SPANNER, 2" (MIN) X 6" BY DOOR OPENING WIDTH PLUS 24" (2 REOD PER LAYER). POSITION SO AS TO MATCH THE HEIGHTS SPECIFIED FOR THE HORIZONTAL PIECES OF THE DOORWAY PROTECTION DETAIL. SEE "NOTE ●" ABOVE.

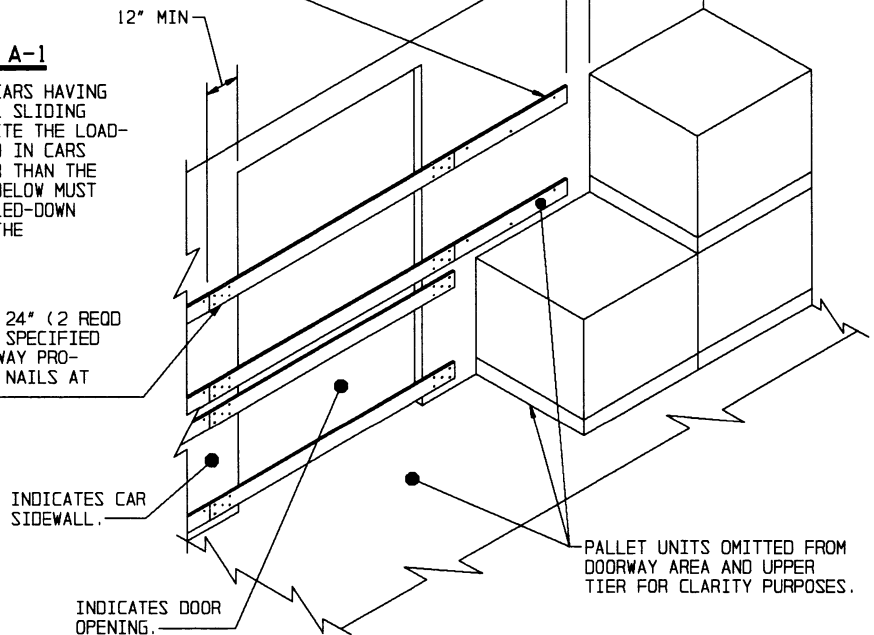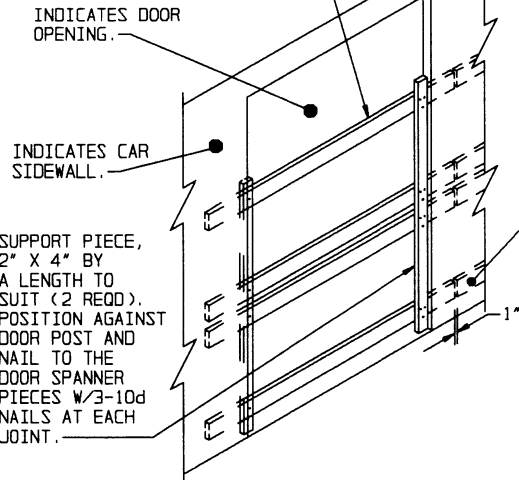

**ALTERNATIVE DOORWAY PROTECTION A-2**

THIS METHOD OF DOORWAY PROTECTION IS FOR USE IN CARS HAVING NAILABLE SIDEWALLS AND EQUIPPED WITH CONVENTIONAL SLIDING DOORS, AND IS APPLICABLE ONLY FOR THE SIDE OPPOSITE THE LOADING SIDE OF THE CAR. SEE THE NOTE UNDER "A-1" PROCEDURES.

INDICATES A FILLER PIECE, 2" X 6" BY A LENGTH TO EQUAL THE LENGTH OF THE FILLER PIECE ON THE OPPOSITE SIDEWALL MINUS 1" (QUANTITY TO BE THE SAME AS FOR THE DOOR SPANNER AND/OR FILLER PIECES ON THE OPPOSITE SIDEWALL). SEE "NOTE ●" ABOVE.

**ALTERNATIVE DOORWAY PROTECTION A-3**

THIS VIEW DEPICTS THE DOOR OPENING OF A CAR AS IT APPEARS WHEN LOOKING AT IT FROM OUTSIDE OF THE CAR. THE METHOD OF DOORWAY PROTECTION IS FOR USE IN CARS HAVING NAILABLE SIDEWALLS AND EQUIPPED WITH CONVENTIONAL SLIDING DOORS, AND IS APPLICABLE FOR THE LOADING SIDE OF THE CAR. NOTE THAT THE ADJACENT PALLET UNITS MUST BE POSITIONED APPROXIMATELY 1-3/4" (REF) FROM THE CAR SIDEWALL (1/4" MORE THAN THE THICKNESS OF THE DOOR SPANNER PIECES) TO FACILITATE THE INSTALLATION OF THESE DOOR SPANNER PIECES. THE VIEW SHOWN ABOVE IS FOR A TWO-LAYER LOAD.

HORIZONTAL PIECE, 1" X 6" BY DOOR OPENING WIDTH (2 REQD PER LAYER). NAIL TO THE VERTICAL PIECES W/3-6d NAILS AT EACH END. SEE THE "DOORWAY PROTECTION" DETAIL ON PAGE 12 FOR HEIGHT LOCATIONS.

VIEW B  
VERTICAL PIECE, 2" X 3" BY A LENGTH TO SUIT (2 REQD).


INDICATES DOOR OPENING.

INDICATES CAR SIDEWALL.

INDICATES FLOOR.

DOORWAY PROTECTION-GATE STRAP, 1-1/4" X .035" X 3'-0" (REF) NAIL-ON TYPE STEEL STRAPPING (4 REQD PER LAYER OF LOAD). NAIL TO GATE AND CAR SIDEWALL AS SHOWN BY THE "VIEW B" SKETCH BELOW. NOTE THAT TYPE 1 STRAPPING MAY BE PUNCHED FOR NAILING IF TYPE 2 STRAPPING IS NOT AVAILABLE.

INDICATES LOCATION OF 7 (MIN) 4d NAILS PER STRAP.



**VIEW B**

THIS VIEW DEPICTS THE LOCATION OF THE NAILS FOR SECURING THE DOORWAY PROTECTION GATE STRAP. NOTE THAT THE STRAPS MUST BE APPLIED TO THE CAR SIDEWALL PRIOR TO POSITIONING THE ADJACENT UNITS.

**ALTERNATIVE DOORWAY PROTECTION B**

THIS METHOD OF DOORWAY PROTECTION IS FOR USE IN CARS EQUIPPED WITH CONVENTIONAL SLIDING DOORS WHEN THE DOOR POSTS ARE STEEL WITHOUT NAILING HOLES AND THE CAR SIDEWALLS ARE NAILABLE. THE VIEW SHOWN ABOVE IS FOR A TWO-LAYER LOAD.

DOOR SPANNER, 2" X 6" BY DOOR OPENING WIDTH PLUS 24" (1 REQD). POSITION ABOVE THE LOAD AND NAIL THRU A FILLER BLOCK INTO A VERTICAL PIECE W/3-12d NAILS AT EACH JOINT. NAIL TO THE CAR SIDEWALL W/2-12d NAILS AT EACH END (OPTIONAL).

DOOR OPENING WIDTH

FILLER BLOCK, 1" X 4" X 9" (2 REQD). NAIL TO A VERTICAL PIECE W/4-6d NAILS.


12"  
VERTICAL PIECE, 2" X 3" BY A LENGTH TO SUIT (2 REQD).

HORIZONTAL PIECE, 1" X 6" BY DOOR OPENING WIDTH (2 REQD PER LAYER). LOCATE AT HEIGHTS AS SPECIFIED BY THE "DOORWAY PROTECTION" DETAIL ON PAGE 12. NAIL TO THE VERTICAL PIECES W/3-6d NAILS AT EACH END.

SPREADER PIECE, 2" X 3" MATERIAL CUT SLIGHTLY LONGER THAN MEASURED DISTANCE (2 REQD). DRIVE INTO POSITION TO PROVIDE FOR A WEDGE FIT. TOENAIL TO THE VERTICAL PIECES W/2-10d NAILS AT EACH END.


**ALTERNATIVE DOORWAY PROTECTION C**

THIS METHOD OF DOORWAY PROTECTION IS FOR USE IN CARS EQUIPPED WITH CONVENTIONAL SLIDING DOORS, WHEN THE DOOR POSTS ARE NOT NAILABLE. IF THE CAR HAS NAILABLE SIDEWALLS, NAIL-ON TYPE STRAPPING MAY BE USED TO SECURE THE GATE IN LIEU OF USING THE SPREADER PIECES. SEE THE "ALTERNATIVE DOORWAY PROTECTION B" DETAIL ABOVE FOR GUIDANCE. NOTE THAT THE DOOR SPANNER IN THIS DETAIL MAY BE USED AS A GATE HOLD-DOWN PIECE FOR THE "ALTERNATIVE GATE HOLD-DOWN" METHOD SHOWN ON PAGE 37.

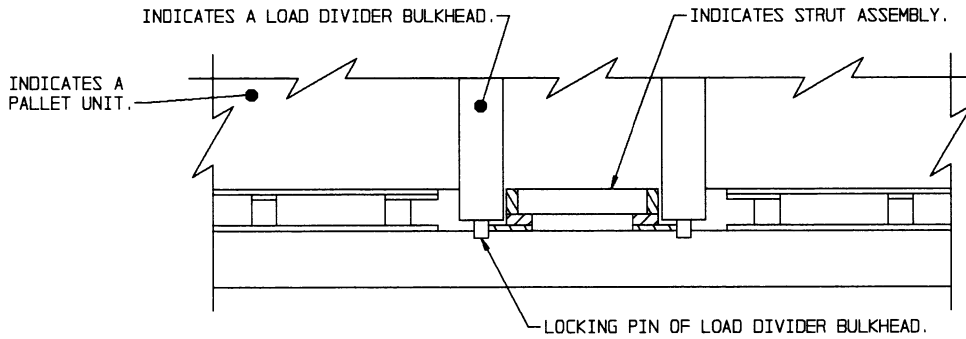


**INSTALLATION OF STRUT ASSEMBLY**

THIS SIDE ELEVATION VIEW SHOWS THE STRUT ASSEMBLY INSTALLED BETWEEN THE LOAD DIVIDER BULKHEADS. NOTE THE 1/2" TO 3/4" (TOTAL) SPACE INTENTIONALLY PROVIDED BETWEEN THE ASSEMBLY AND THE BULKHEADS.

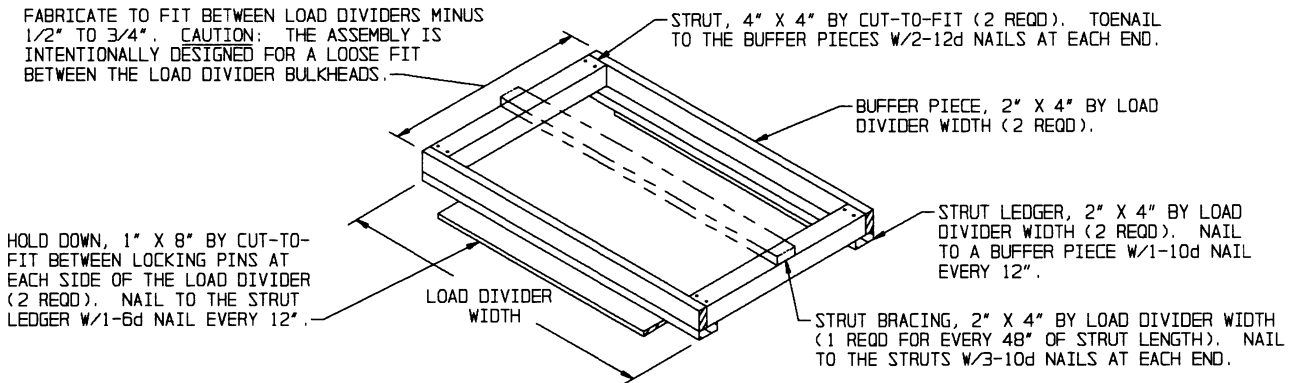

**STRUT ASSEMBLY FOR 2-PIECE BULKHEADS**

A STRUT ASSEMBLY IS REQUIRED WHEN THE LOAD BEHIND EITHER LOAD DIVIDER BULKHEAD EXCEEDS 50,000 POUNDS OF HAZARD CLASS AND DIVISION 1.1, 1.2, OR 1.3 EXPLOSIVES. A STRUT ASSEMBLY IS NOT REQUIRED FOR LOADS OF HAZARD CLASS AND DIVISION 1.4 EXPLOSIVES, REGARDLESS OF THE WEIGHT OF THE LOAD. NOTE: TWO ASSEMBLIES AS SHOWN ARE REQUIRED FOR A 2-PIECE BULKHEAD IF NOT LATERALLY ALIGNED. SEE "NOTE ▲" BELOW.

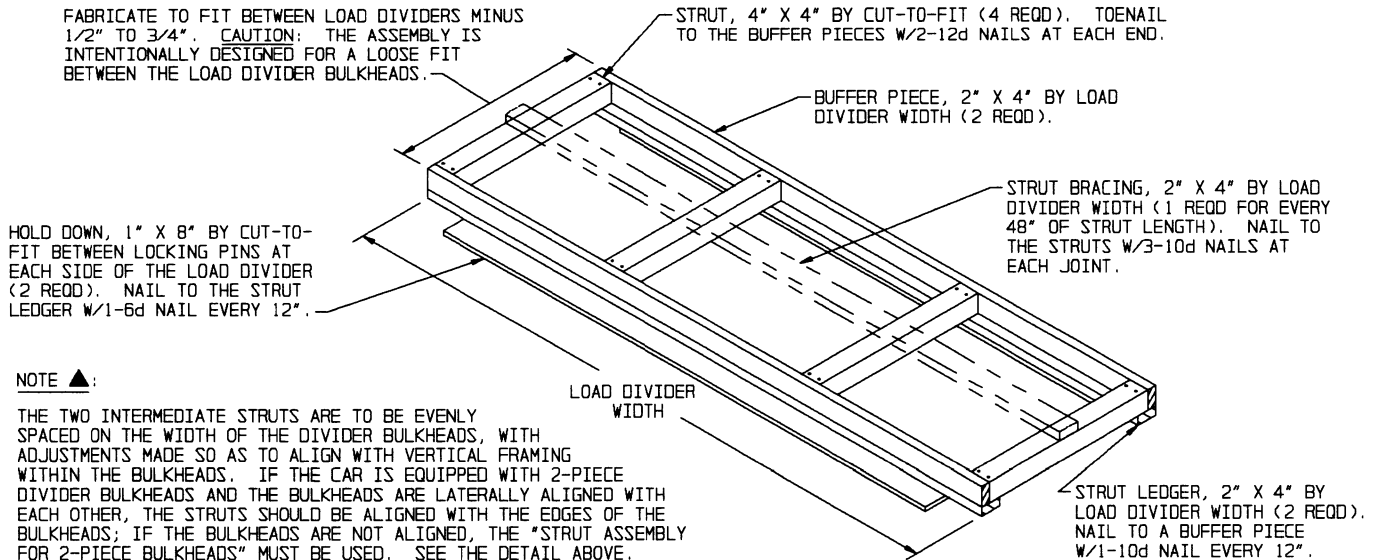


**NOTE ▲:**

THE TWO INTERMEDIATE STRUTS ARE TO BE EVENLY SPACED ON THE WIDTH OF THE DIVIDER BULKHEADS, WITH ADJUSTMENTS MADE SO AS TO ALIGN WITH VERTICAL FRAMING WITHIN THE BULKHEADS. IF THE CAR IS EQUIPPED WITH 2-PIECE DIVIDER BULKHEADS AND THE BULKHEADS ARE LATERALLY ALIGNED WITH EACH OTHER, THE STRUTS SHOULD BE ALIGNED WITH THE EDGES OF THE BULKHEADS; IF THE BULKHEADS ARE NOT ALIGNED, THE "STRUT ASSEMBLY FOR 2-PIECE BULKHEADS" MUST BE USED. SEE THE DETAIL ABOVE.

**STRUT ASSEMBLY FOR 1-PIECE BULKHEADS**

A STRUT ASSEMBLY IS REQUIRED WHEN THE LOAD BEHIND EITHER LOAD DIVIDER BULKHEAD EXCEEDS 50,000 POUNDS OF HAZARD CLASS AND DIVISION 1.1, 1.2, OR 1.3 EXPLOSIVES. A STRUT ASSEMBLY IS NOT REQUIRED FOR LOADS OF HAZARD CLASS AND DIVISION 1.4 EXPLOSIVES, REGARDLESS OF THE WEIGHT OF THE LOAD.

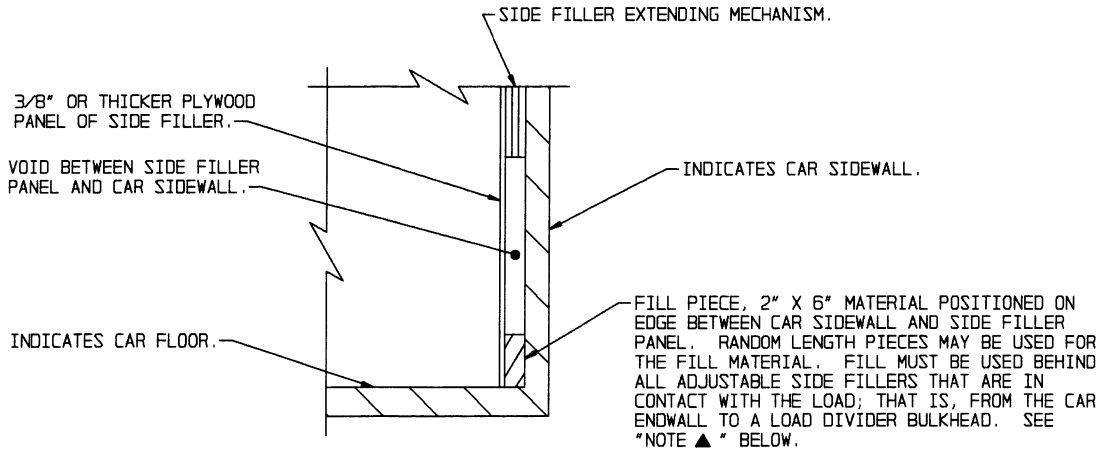


**TYPICAL TYPE A**

THIS VIEW SHOWS THE INSTALLATION OF A "FILL PIECE" IN A CAR EQUIPPED WITH A STANDARD ADJUSTABLE SIDE FILLER.

**NOTE ▲:**

NAILING OF "FILL PIECES" IS NOT REQUIRED EXCEPT THAT EACH "FILL PIECE" LOCATED NEAREST THE DOOR OPENINGS OF THE CAR WILL BE SECURED AGAINST LONGITUDINAL MOVEMENT W/1-6d NAIL DRIVEN THROUGH THE SIDE FILLER PANEL AND INTO THE "FILL PIECE".

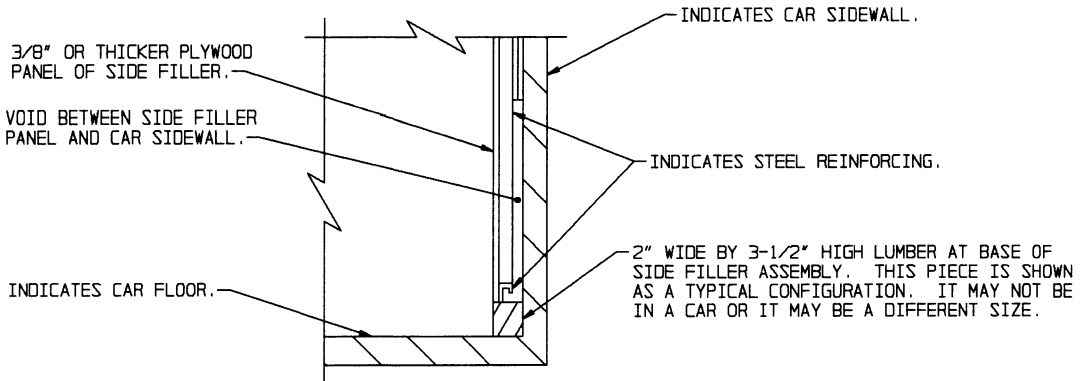

**TYPICAL TYPE B**

THIS VIEW SHOWS A TYPICAL SECTION OF A CAR EQUIPPED WITH HEAVY DUTY, STEEL REINFORCED, ADJUSTABLE SIDE FILLERS. A "FILL PIECE", AS SHOWN IN THE "TYPICAL TYPE A" DETAIL ABOVE, IS NOT REQUIRED IN CARS SO EQUIPPED.