

APPROVED BY  
BUREAU OF EXPLOSIVES

*J. H. Fleckman*

DATE *5/13/94*

# LOADING AND BRACING<sup>●</sup> IN MILVAN CONTAINERS<sup>⊕</sup> OF CBU-52, CBU-58 OR CBU-71 IN CNU-126/E, CNU-180/E OR CNU-180B/E SHIPPING AND STORAGE CONTAINERS

## INDEX

<u>ITEM</u>	<u>PAGE(S)</u>
TYPICAL LOADING PROCEDURES - - - - -	2
GENERAL NOTES AND MATERIAL SPECIFICATIONS - - - - -	3
CONTAINER DETAILS - - - - -	4
DETAILS - - - - -	5
LESS-THAN-FULL-LOAD DETAILS - - - - -	6

● LOADING AND BRACING SPECIFICATIONS SET FORTH WITHIN THIS DRAWING ARE APPLICABLE TO LOADS THAT ARE TO BE SHIPPED BY TRAILER/CONTAINER-ON-FLATCAR (T/COFC) RAIL CARRIER SERVICE. THESE SPECIFICATIONS MAY ALSO BE USED FOR LOADS THAT ARE TO BE MOVED BY MOTOR OR WATER CARRIERS.

⊕ ONLY MILVAN CONTAINERS WHICH HAVE BEEN MODIFIED TO INCLUDE A MECHANICAL LOAD-BRACING SYSTEM THAT SATISFIES THE REQUIREMENTS OF THE BUREAU OF EXPLOSIVES PAMPHLET 6C WILL BE USED FOR THE MOVEMENT OF AMMUNITION BY T/COFC SERVICE. CAUTION: OTHER REQUIREMENTS OF PAMPHLET 6C ALSO APPLY.

## U.S. ARMY MATERIEL COMMAND DRAWING

APPROVED, U.S. ARMY ARMAMENT, MUNITIONS AND  
CHEMICAL COMMAND

*David E. Stehnick*

DRAFTSMAN

TECHNICIAN

ENGINEER

L. FIEFFER

APPROVED BY ORDER OF COMMANDING GENERAL, U.S.  
ARMY MATERIEL COMMAND

*John L. Byrd Jr*  
U.S. ARMY DEFENSE AMMUNITION CENTER AND SCHOOL

VALIDATION  
ENGINEERING  
DIVISION

TRANSPORTATION  
ENGINEERING  
DIVISION

LOGISTICS  
ENGINEERING  
OFFICE


*JAN* *W. F. Ernst*

JANUARY 1994

CLASS	DIVISION	DRAWING	FILE
19	48	8547	SP15J43

DO NOT SCALE

NOTE: THE CNU-180/E IS SHOWN IN THE LOAD BELOW, HOWEVER, THE DEPICTED PROCEDURES MAY ALSO BE USED FOR LOADING CNU-126/E OR CNU-180B/E CONTAINERS.

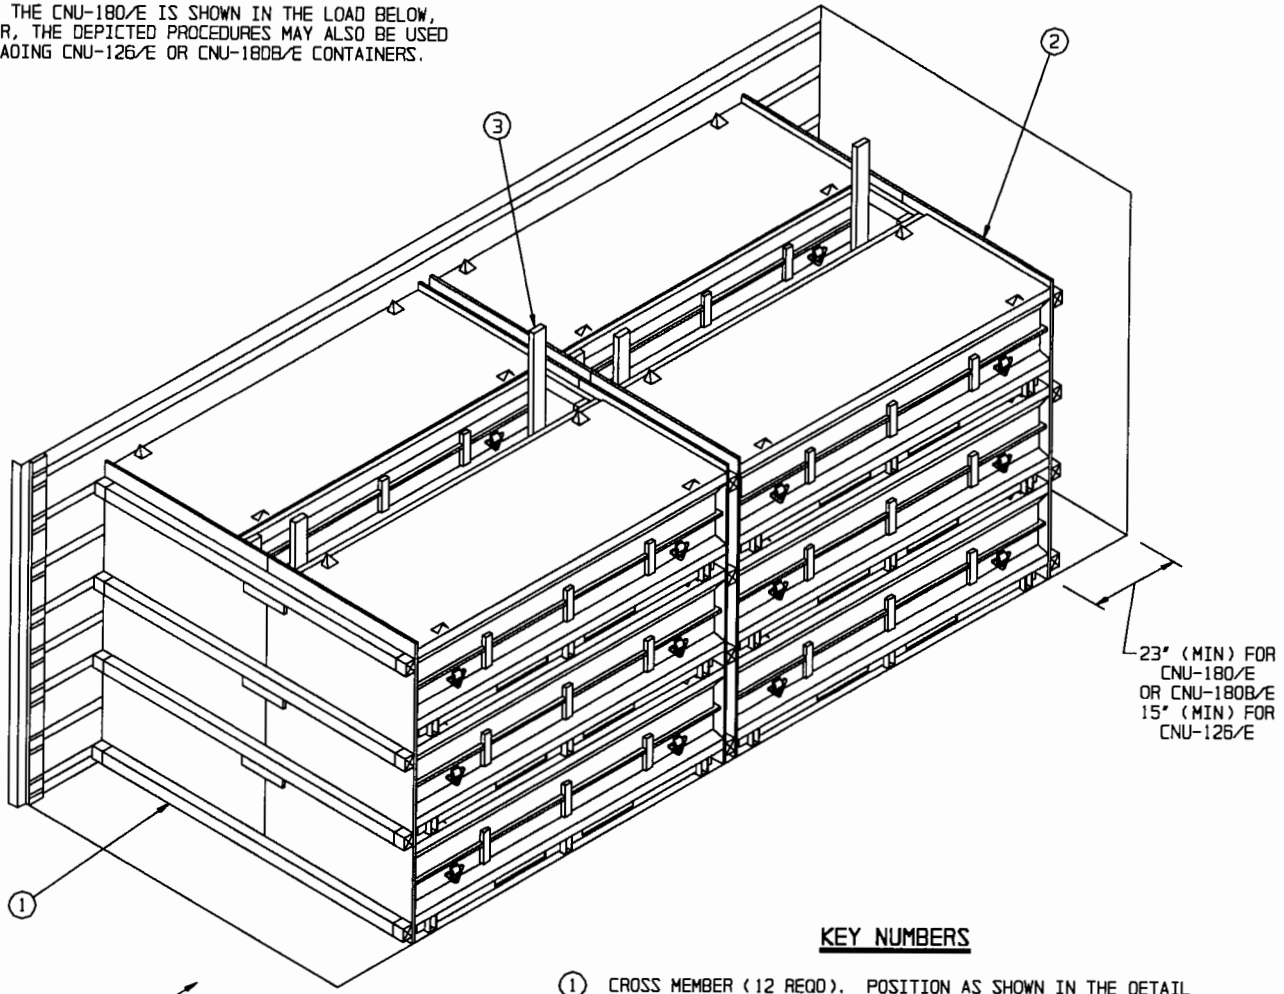

REAR OF CONTAINER. →

ISOMETRIC VIEW

KEY NUMBERS

- ① CROSS MEMBER (12 REQD). POSITION AS SHOWN IN THE DETAIL ABOVE, AT THE 5", 28", 48" AND 72" HEIGHTS. SEE THE "FILL DETAIL" ON PAGE 6.
- ② SEPARATOR GATE (4 REQD). SEE THE DETAIL ON PAGE 5.
- ③ CENTER FILL ASSEMBLY (2 REQD). SEE THE DETAIL ON PAGE 5.

BILL OF MATERIAL

LUMBER	LINEAR FEET	BOARD FEET
1" X 4"	12	4
2" X 4"	158	106
NAILS	NO. REQD	POUNDS
6d (2")	72	1/2
10d (3")	96	1-1/2
PLYWOOD, 3/4"	192.11 SQ FT REQD	396.23 LBS
CROSS MEMBER	12 REQD	

LOAD AS SHOWN

ITEM	QUANTITY	WEIGHT (APPROX)
CBU-5B IN CNU-180/E	12	25,008 LBS
DUNNAGE		619 LBS
CONTAINER		5,700 LBS
TOTAL WEIGHT		31,327 LBS (APPROX)

(GENERAL NOTES CONTINUED)

GENERAL NOTES

- H. PORTIONS OF THE MILVAN DEPICTED WITHIN THIS DRAWING, SUCH AS ONE OF THE SIDEWALLS, HAVE NOT BEEN SHOWN IN THE LOAD VIEWS FOR CLARITY PURPOSES.
- J. CONVERSION TO METRIC EQUIVALENTS: DIMENSIONS WITHIN THIS DOCUMENT ARE EXPRESSED IN INCHES, AND WEIGHTS ARE EXPRESSED IN POUNDS. WHEN NECESSARY, THE METRIC EQUIVALENTS MAY BE COMPUTED ON THE BASIS OF ONE INCH EQUALS 25.4MM AND ONE POUND EQUALS 0.454 KG.
- K. MAXIMUM LOAD WEIGHT CRITERIA:

THE ITEMIZED LOAD WEIGHTS ARE CONTROLLED BY EQUIPMENT CAPABILITY FACTORS. ALSO, THESE LISTED LOAD WEIGHTS IDENTIFY THE COMBINED WEIGHT OF AMMUNITION LADING UNITS AND DUNNAGE THAT CAN BE PLACED INTO ONE MILVAN CONTAINER WITHOUT VIOLATING ONE OR MORE OF THE "CAPABILITY FACTORS". SEE NOTES 1 AND 2.

- 39,100 LBS IN 20-FT CONTAINER (W/O CHASSIS) ABOARD CONTAINERSHIP.
- 39,100 LBS IN CONTAINER ON 20-FT CHASSIS WITH DOUBLE BOGIE. SEE NOTE 3.
- 25,300 LBS IN CONTAINER ON 20-FT CHASSIS WITH SINGLE BOGIE. SEE NOTE 4.
- 21,300 LBS IN EACH CONTAINER ON 40-FT CHASSIS (COUPLED WITH DOUBLE BOGIE). SEE NOTE 3.

NOTE 1: DUNNAGE INCLUDES MATERIALS, OTHER THAN COMPONENTS OF THE MECHANICAL LOAD BRACING SYSTEM, USED TO BLOCK AND BRACE A LOAD.

NOTE 2: ALTHOUGH THE HEAVIEST MAXIMUM LOADS ARE DELINEATED IN THE LOAD VIEWS, PROVISIONS ARE INCLUDED WITHIN THIS DRAWING SO THAT THE BASIC LOADS CAN BE ADJUSTED TO SATISFY A LESSER QUANTITY OF LADING UNITS.

NOTE 3: DEPENDING ON TRANSPORTATION ROUTING, IT MAY BE NECESSARY TO REDUCE THE LOAD WEIGHT TO SATISFY "WEIGHT LAWS" OF CERTAIN STATES. ALSO, IT MAY BE NECESSARY TO REDUCE THE LOAD WEIGHT TO SATISFY OTHER WEIGHT RESTRICTIONS IMPOSED ON THE MILVAN SYSTEM.

NOTE 4: BY SPECIAL AUTHORITY, IT MAY BE POSSIBLE TO MOVE HEAVIER LOADS ON SINGLE BOGIE CHASSIS WITHIN AN INSTALLATION.

L. SPECIAL T/COFC NOTES:

1. CAUTION: LOADED CONTAINERS MUST BE ON CHASSIS EQUIPPED WITH TWO BOGIE ASSEMBLIES WHEN BEING MOVED IN TOFC SERVICE, REGARDLESS OF THE LOAD WEIGHT WITHIN THE CONTAINER.
2. LOAD LIMITS OF T/COFC RAIL CARS MUST NOT BE EXCEEDED, NOR WILL A CAR BE LOADED SO THAT THE TRUCK UNDER ONE END OF THE CAR CARRIES MORE THAN ONE-HALF OF THE LOAD LIMIT FOR THAT CAR.
3. CHASSIS/CONTAINERS COUPLED INTO A 40-FOOT TRAILER CONFIGURATION MUST BE PLACED AT THE B-END OF A TOFC RAIL CAR. THE REAR END OF THE 40-FOOT UNIT WILL OVERHANG THE END OF THE CAR IF IT IS PLACED AT THE A-END. TWENTY-FOOT AND 40-FOOT UNITS CAN BE LOADED ON THE SAME CAR.


- M. WHEN LOADING CONTAINERS, THEY ARE TO BE POSITIONED SO AS TO ACHIEVE A TIGHT LOAD (TIGHT AGAINST THE DUNNAGE ASSEMBLIES). THE UNBLOCKED SPACE ACROSS THE WIDTH OF A LOAD BAY IS NOT TO EXCEED 1-1/2". EXCESSIVE SLACK CAN BE ELIMINATED BY LAMINATING ADDITIONAL PIECES OF APPROPRIATE THICKNESS TO THE LONGITUDINAL PIECES ON THE CENTER FILL ASSEMBLIES. NAIL EACH ADDITIONAL PIECE TO THE LONGITUDINAL PIECE W/1 APPROPRIATELY SIZED NAIL EVERY 12". ADDITIONALLY, THE LENGTH OF THE LATERAL PIECES IN THE CENTER FILL ASSEMBLY MAY BE ADJUSTED, AS NECESSARY, TO FACILITATE VARIANCE IN THE CONTAINER SIZE.
- N. THE QUANTITY OF CONTAINERS SHOWN IN THE LOAD ON PAGE 2 MAY BE REDUCED FOR SHIPMENT, IF DESIRED. SEE THE "LESS-THAN-FULL LOAD" DETAIL ON PAGE 6. WHEN A MILVAN IS TO BE LOADED WITH A REDUCED QUANTITY OF LADING UNITS, THE LENGTHWISE CENTER OF GRAVITY OF THE LOAD MUST BE WITHIN 12", IN EITHER DIRECTION, OF THE MID-POINT OF THE MILVAN.
- O. ANTI-CHAFING MATERIAL MAY BE INSTALLED AT POINTS OF CONTACT BETWEEN CONTAINERS AND THE MILVAN, AND BETWEEN CONTAINERS AND STEEL STRAPPING, IF DESIRED, TO PREVENT CHAFING DAMAGE TO CONTAINER PAINT AND MARKINGS.

- A. THIS DOCUMENT HAS BEEN PREPARED AND ISSUED IN ACCORDANCE WITH AR 740-1 AND AUGMENTS TM 743-200-1 (CHAPTER 5).
- B. THE OUTLOADING PROCEDURES SPECIFIED HEREIN ARE APPLICABLE TO LOADS OF CBU-52, CBU-58 OR CBU-71 PACKED IN CNU-126/E, CNU-180/E OR CNU-180B/E CONTAINERS. SUBSEQUENT REFERENCE TO CONTAINER HEREIN MEANS THE CONTAINER WITH CBU ITEMS INSTALLED. SEE PAGE 4 FOR DETAILS OF THE CONTAINERS. CAUTION: REGARDLESS OF THE QUANTITY OF UNITS TO BE SHIPPED, THE "MAXIMUM GROSS WEIGHT" OF THE MILVAN MUST NOT BE EXCEEDED.
- C. THE LOADS AS SHOWN ARE BASED ON A 20' LONG BY 8' WIDE BY 8' HIGH MILVAN CONTAINER WITH INSIDE DIMENSIONS OF 19'-4" LONG BY 92" WIDE BY 87" HIGH. THE LOADS ARE DESIGNED FOR TRAILER/CONTAINER-ON-FLATCAR (T/COFC) SHIPMENT.
- D. THE SPECIFIED OUTLOADING PROCEDURES ARE FOR CONTAINERS EQUIPPED WITH SELF-CONTAINED MECHANICAL BRACING DEVICES AS DESCRIBED WITHIN BUREAU OF EXPLOSIVES PAMPHLET 6C. CROSS MEMBER ATTACHMENT FACILITIES WITHIN THESE CONTAINERS MUST PROVIDE FOR THE INSTALLATION OF LOAD BLOCKING CROSS MEMBERS AT THE HEIGHTS SPECIFIED. THE WEIGHT DIMENSIONS SPECIFIED WITHIN THIS DRAWING FOR THE INSTALLATION OF CROSS MEMBERS CONFORM WITH THE BUREAU OF EXPLOSIVES PAMPHLET 6C, WITH THE EXCEPTION THAT TWO ADDITIONAL BELT RAILS HAVE BEEN SHOWN: ONE AT 72" AND ONE AT 83" HIGH FROM THE CONTAINER FLOOR. VOIDS LENGTHWISE WITHIN THE LOAD MUST BE HELD TO A MINIMUM. CROSS MEMBERS MUST BE PLACED AGAINST THE LADING AS TIGHTLY AS THE HOLE SPACING IN THE CROSS MEMBER ATTACHMENT FACILITY PERMITS. EACH CROSS MEMBER WILL BE INSTALLED WITH THE ENDS ATTACHED AS NEARLY AS POSSIBLE IN "MATED" POSITIONS (AT EQUAL HEIGHT AND AT EQUAL DISTANCES FROM THE END OF THE CONTAINER). CROSS MEMBERS IN EMPTY CONTAINERS AND THOSE NOT USED IN LOADED CONTAINERS MUST BE FASTENED INTO BELT RAILS FOR SHIPMENT. COMPONENTS ASSIGNED TO EACH CONTAINER MUST REMAIN THEREWITH EVEN THOUGH UNUSED DURING SOME SHIPMENTS. SEE THE "FILL DETAIL" ON PAGE 6 FOR THE DUNNAGING METHOD REQUIRED TO ELIMINATE AN EXCESSIVE LENGTHWISE VOID WITHIN A LOAD. THE LOAD BLOCKING COMPONENT DESIGNATED AS "CROSS MEMBER" HEREIN, IS IDENTIFIED AS "BEAM ASSEMBLY" WITHIN TM 55-8115-200-23 & P, DATED DECEMBER 1979. THE BEAM ASSEMBLY IS FURTHER IDENTIFIED AS NSN 8115-00-165-6623.
- E. DUNNAGE LUMBER SPECIFIED IS OF A NOMINAL SIZE. FOR EXAMPLE, 1" X 4" MATERIAL IS ACTUALLY 3/4" THICK BY 3-1/2" WIDE AND 2" X 6" MATERIAL IS ACTUALLY 1-1/2" THICK BY 5-1/2" WIDE.
- F. CAUTION: DO NOT NAIL DUNNAGE MATERIAL TO THE MILVAN WALLS OR FLOOR. ALL NAILING WILL BE WITHIN THE DUNNAGE.
- G. A STAGGERED NAILING PATTERN WILL BE USED WHENEVER POSSIBLE WHEN NAILS ARE DRIVEN INTO JOINTS OF DUNNAGE ASSEMBLIES OR WHEN LAMINATING DUNNAGE. ADDITIONALLY, THE NAILING PATTERN FOR AN UPPER PIECE OF LAMINATED DUNNAGE WILL BE ADJUSTED AS REQUIRED SO THAT A NAIL FOR THAT PIECE WILL NOT BE DRIVEN THROUGH ONTO OR RIGHT BESIDE A NAIL IN A LOWER PIECE.

(CONTINUED AT LEFT)


MATERIAL SPECIFICATIONS

- LUMBER - - - - - : SEE TM 743-200-1 (DUNNAGE LUMBER) AND FED SPEC MM-L-751.
- NAILS - - - - - : FED SPEC FF-N-105; COMMON.
- PLYWOOD - - - - - : COMMERCIAL ITEM DESCRIPTION A-A-55057, TYPE A, CONSTRUCTION AND INDUSTRIAL PLYWOOD, INTERIOR WITH EXTERIOR GLUE, GRADE C-D. IF SPECIFIED GRADE IS NOT AVAILABLE, A BETTER INTERIOR OR AN EXTERIOR GRADE MAY BE SUBSTITUTED.
- STRAPPING, STEEL - - : ASTM D3953; FLAT STRAPPING, TYPE 1, HEAVY DUTY, FINISH A, B (GRADE 2), OR C.
- SEAL, STRAP - - - - : ASTM D3953; CLASS H, FINISH A, B (GRADE 2), OR C, DOUBLE NOTCH TYPE, STYLE I, II, OR IV.
- ANTI-CHAFING MATERIAL - - - - - : MIL-B-121 (OR EQUAL); NEUTRAL BARRIER MATERIAL.

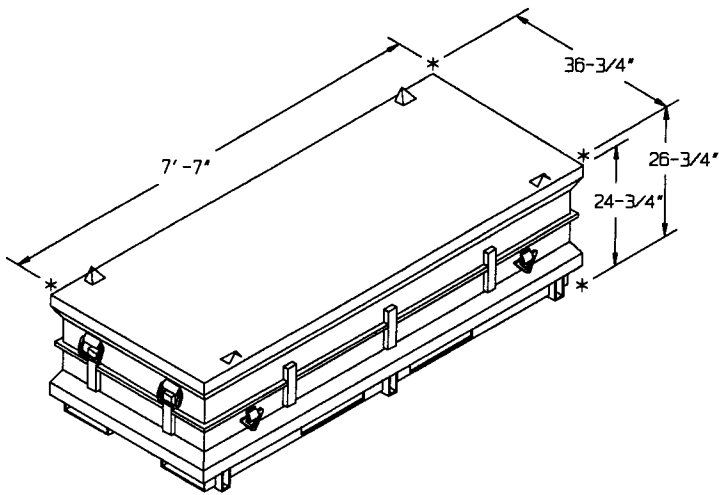


**CNU-180/E CONTAINER**

CONTAINER WEIGHT  
 FOR CBU-58 - - - - - 2,084 LBS (APPROX)  
 FOR CBU-71 - - - - - 2,064 LBS (APPROX)  
 CONTAINER CUBE - - - - - 47.9 CU FT (APPROX)

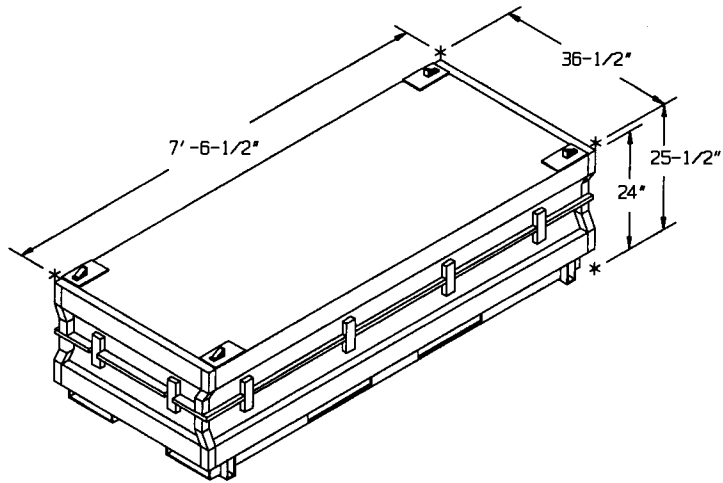

**CNU-180B/E CONTAINER**

CONTAINER WEIGHT  
 FOR CBU-58 - - - - - 2,084 LBS (APPROX)  
 FOR CBU-71 - - - - - 2,064 LBS (APPROX)  
 CONTAINER CUBE - - - - - 45.9 CU FT (APPROX)

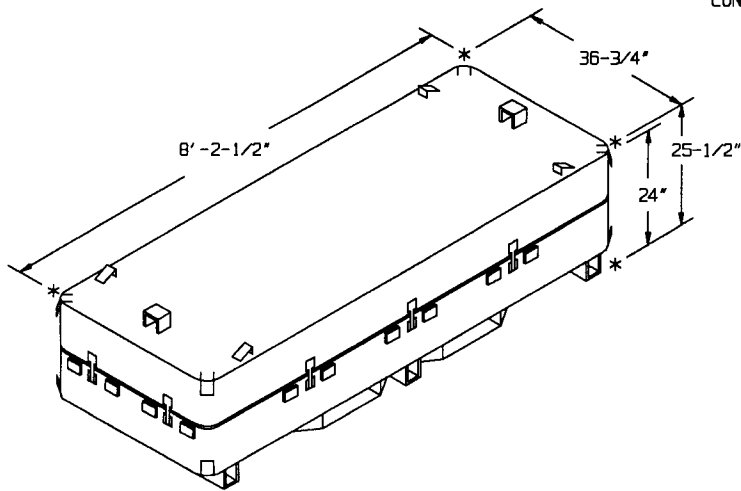


**CNU-126/E CONTAINER**

CONTAINER WEIGHT  
 FOR CBU-52 - - - - - 2,032 LBS (APPROX)  
 FOR CBU-58 - - - - - 2,160 LBS (APPROX)  
 CONTAINER CUBE - - - - - 49.3 CU FT (APPROX)

PLYWOOD, 3/4" X 48" X 6'-4" (1 REOD).

TIE PIECE, 1" X 4" X 12" (3 REOD). NAIL THROUGH THE PLYWOOD W/3-6d NAILS AT EACH END AND CLINCH.

PLYWOOD, 3/4" X 43" X 6'-4" (1 REOD).

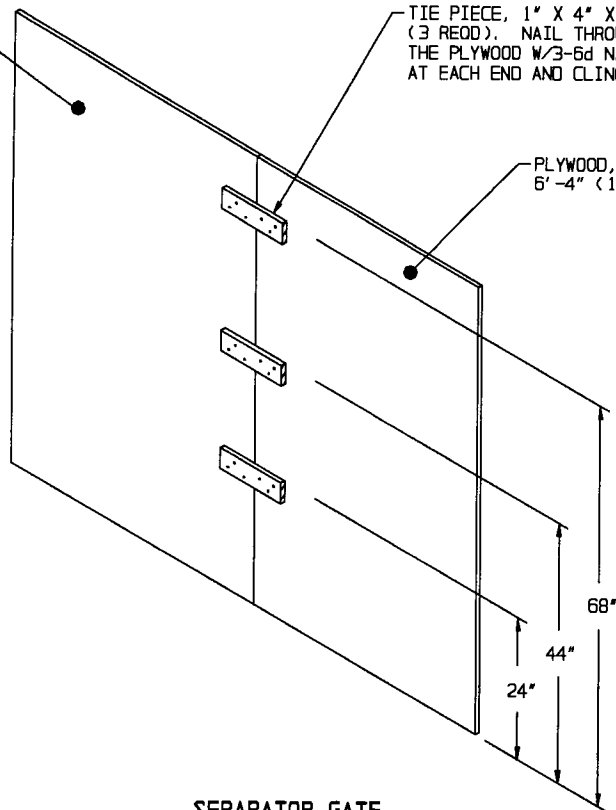


**SEPARATOR GATE**

VERTICAL PIECE, 2" X 4" BY INSIDE CONTAINER HEIGHT MINUS 1" (REF: 7'-2") (2 REOD).

VERTICAL PIECE, 2" X 4" X 6'-2" (2 REOD).

LONGITUDINAL PIECE, 2" X 4" X 7'-6" FOR CNU-180/E OR CNU-180B/E OR 8'-0" FOR CNU-126/E (6 REOD). NAIL TO THE VERTICAL PIECES W/2-10d NAILS AT EACH END.


LATERAL PIECE, 2" X 4" X 14" (6 REOD). NAIL TO THE VERTICAL PIECES W/2-10d NAILS AT EACH END.

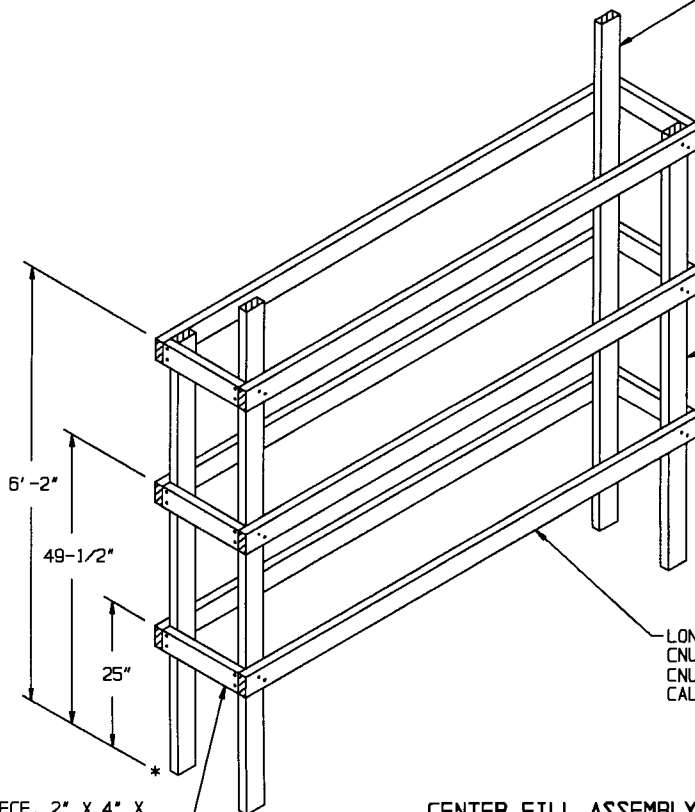

**CENTER FILL ASSEMBLY**

NOTE: FOR TWO HIGH LOAD, ELIMINATE THE TOP TWO LONGITUDINAL PIECES AND THE TOP TWO LATERAL PIECES, AND FOR A ONE HIGH LOAD, ELIMINATE THE TOP FOUR LONGITUDINAL PIECES AND THE TOP FOUR LATERAL PIECES. SHORTEN THE VERTICAL PIECES APPROPRIATELY.

UNITIZING STRAP, 1-1/4" X .035" OR .031" X 15'-6" LONG STEEL STRAPPING (2 REOD PER CONTAINER STACK). INSTALL TO ENCIRCLE THE TOP TWO CONTAINERS. SEAL WITH ONE SEAL CRIMPED WITH TWO PAIR OF NOTCHES OR WITH TWO SEALS, EACH CRIMPED WITH TWO PAIR OF CRIMPS.

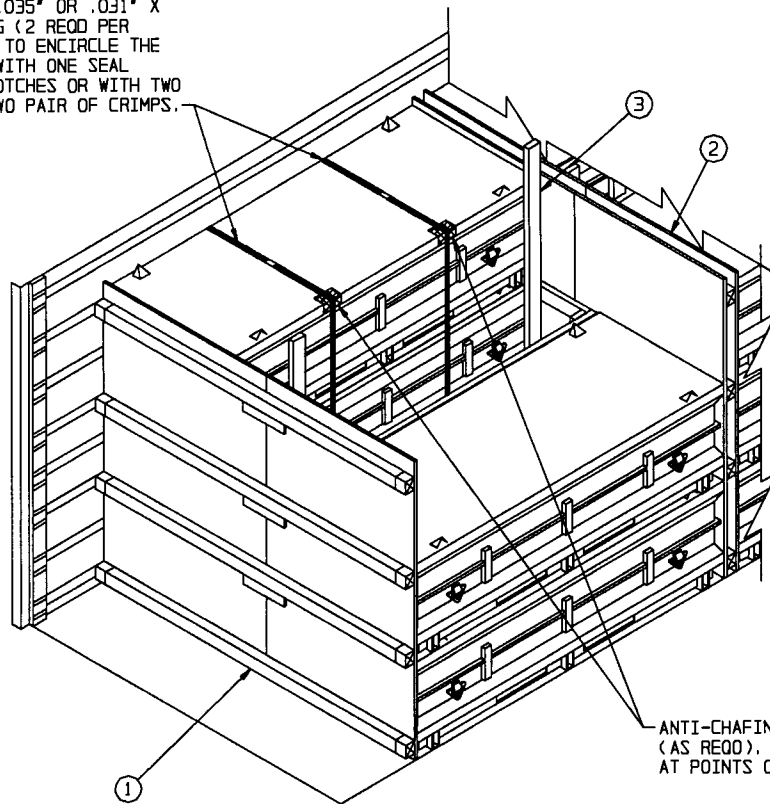

ANTI-CHAFING, NEUTRAL BARRIER MATERIAL (AS REOD), POSITION UNDER ALL STRAPS AT POINTS OF CONTACT WITH THE CONTAINERS.

ISOMETRIC VIEW


SPECIAL NOTE:

WHEN REDUCING A LOAD BY ONE OR MORE CONTAINERS, IT WILL BE NECESSARY TO UNITIZE THE CONTAINER STACKS WHICH ARE LATERALLY ADJACENT TO THE OMITTED CONTAINER AS DEPICTED IN THE LOAD VIEW ABOVE. SEE GENERAL NOTE "N" ON PAGE 3.

LESS-THAN-FULL-LOAD PROCEDURE

KEY NUMBERS REFER TO KEY NUMBERS ON PAGE 2. NOTE THAT THE CENTER FILL ASSEMBLY HAS BEEN MODIFIED AS DESCRIBED ON PAGE 5.

FILL MATERIAL, 1" X 4" OR 2" X 4" MATERIAL BY CONTAINER WIDTH MINUS 1" (AS REOD).

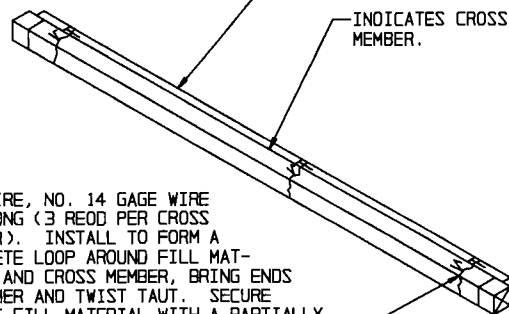

INDICATES CROSS MEMBER.

TIE WIRE, NO. 14 GAGE WIRE 18" LONG (3 REOD PER CROSS MEMBER). INSTALL TO FORM A COMPLETE LOOP AROUND FILL MATERIAL AND CROSS MEMBER, BRING ENDS TOGETHER AND TWIST TAUT. SECURE TO THE FILL MATERIAL WITH A PARTIALLY DRIVEN 10d NAIL BENT OVER THE WIRE, OR WITH A STRAP STAPLE.

FILL DETAIL