

LOADING AND BRACING (TL & LTL) IN VAN TRAILERS* OF GBU-39/B SMALL DIAMETER BOMB CARRIAGE/SYSTEM PACKED IN CNU-660 CONTAINERS

INDEX

ITEM	PAGE(S)
GENERAL NOTES AND MATERIAL SPECIFICATIONS - - - - -	2
CNU-660 CONTAINER DETAIL - - - - -	3
17 UNIT LOAD ON A 40'-0" LONG BY 8'-2" WIDE VAN TRAILER - - - - -	4-5
17 UNIT LOAD ON A 45'-0" LONG BY 7'-8" WIDE VAN TRAILER - - - - -	6-7
17 UNIT LOAD ON A 48'-0" LONG BY 8'-2" WIDE VAN TRAILER - - - - -	8-9
15 UNIT LOAD ON A 53'-0" LONG BY 8'-2" WIDE VAN TRAILER - - - - -	10-11
TYPICAL LTL (2 UNIT LOAD) - - - - -	12-13
DETAILS - - - - -	14-16

***CAUTION:** THE PROCEDURES SHOWN HEREIN ARE ONLY APPLICABLE TO HIGHWAY MOVEMENTS, NOT TRAILER-ON-FLATCAR (TOFC) MOVEMENTS.

U.S. ARMY MATERIEL COMMAND DRAWING

APPROVED, U.S. ARMY FIELD SUPPORT COMMAND	CAUTION: VERIFY PRIOR TO USE AT WWW.DAC.ARMY.MIL THAT THIS IS THE MOST CURRENT VERSION OF THIS DOCUMENT. THIS IS PAGE 1 OF 16.						
	DO NOT SCALE			JULY 2005			
	ENGINEER OR TECHNICIAN	BASIC REV.	RICHARD GARSIDE				
APPROVED BY ORDER OF COMMANDING GENERAL, U.S. ARMY MATERIEL COMMAND	TRANSPORTATION ENGINEERING DIVISION						
	VALIDATION ENGINEERING DIVISION		TESTED	CLASS	DIVISION	DRAWING	FILE
	ENGINEERING DIRECTORATE			19	48	8834	SP11J44
U.S. ARMY DEFENSE AMMUNITION CENTER							

GENERAL NOTES


(GENERAL NOTES CONTINUED)

- A. THIS DOCUMENT HAS BEEN PREPARED AND ISSUED IN ACCORDANCE WITH AR 740-1 AND AUGMENTS TM 743-200-1 (CHAPTER 5).
- B. THE SPECIFIED OUTLOADING PROCEDURES ARE APPLICABLE TO LOADS OF SMALL DIAMETER BOMB CARRIAGE/SYSTEM PACKED ONE BRU-61A CARRIAGE SYSTEM AND FOUR GBU-39/B BOMBS PER CNU-660 CONTAINER. SUBSEQUENT REFERENCE TO CONTAINER HEREIN MEANS THE CONTAINER WITH AMMUNITION ITEMS IN THEM. SEE PAGE 3 AND BOEING DRAWING 70P993153-1001 FOR DETAILS OF THE CONTAINER.
- C. THE OUTLOADING PROCEDURES DEPICTED WITHIN THIS DOCUMENT ARE APPLICABLE FOR SHIPMENTS IN CONVENTIONAL TYPE VAN TRAILERS AND APPLY TO TRAILERS HAVING WOOD, OR WOOD AND METAL, OR ALL METAL FLOORS. REGARDLESS OF THE DIMENSIONS OF THE VAN TRAILERS SHOWN, THE PROCEDURES ARE ALSO APPLICABLE FOR TRAILERS WHICH ARE 89" THRU 99" IN WIDTH AND FOR TRAILERS OF OTHER LENGTHS FROM THE SHORTEST TO THE LONGEST AVAILABLE (REF: 24' TO 53'), AND FOR STRAIGHT TRUCK VANS. THE SPECIFIED BRACING IS ADEQUATE FOR LOADS WEIGHING UP TO AND INCLUDING THE MAXIMUM WEIGHTS PERMITTED BY LAW.
- D. SELECTION OF A VEHICLE FOR THE TRANSPORT OF THE DESIGNATED ITEM IS THE RESPONSIBILITY OF THE ORIGINATING CARRIER AND THE SHIPPER. ONLY VEHICLES IN ACCORDANCE WITH THE REQUIREMENTS OF THE APPLICABLE REGULATORY DOCUMENTS WILL BE SELECTED FOR USE.
- E. GROSS WEIGHT AND AXLE DISTRIBUTION OF WEIGHT FOR A LOAD WILL BE THE RESPONSIBILITY OF THE CARRIER. THE CARRIER WILL ADVISE THE SHIPPER OF APPLICABLE LOADING REQUIREMENTS, AND THE SHIPPER WILL LOAD ACCORDINGLY. THE TOTAL WEIGHT OF THE LADING, OF THE DUNNAGE, OF THE TRACTOR, AND OF THE SEMITRAILER CARRYING THE LADING MUST NOT EXCEED THE MAXIMUM GROSS WEIGHT ALLOWED FOR THE STATE OR STATES THRU WHICH THE LOAD IS TO BE TRANSPORTED BY MOTOR CARRIER. LIKEWISE, THE GROSS WEIGHT ON A SINGLE OR TANDEM AXLE MUST NOT EXCEED THE MAXIMUM ALLOWABLE WEIGHT. IF THERE IS ANY DOUBT AS TO WHETHER THE TOTAL GROSS WEIGHT OR AXLE WEIGHT EXCEEDS THE MAXIMUM ALLOWED, WEIGHT SHOULD BE VERIFIED BY ACTUALLY WEIGHING THE LOADED VEHICLE.
- F. **NOTICE:** A SHIPMENT WILL BE POSITIONED IN THE TRAILER CONSISTENT WITH STATE WEIGHT LAWS. THE NUMBER OF LADING UNITS MAY BE ADJUSTED TO FIT THE SIZE OF THE TRAILER TO BE LOADED OR THE QUANTITY TO BE SHIPPED. COMBINATIONS OF THE OUTLOADING PROCEDURES SPECIFIED MAY BE USED, HOWEVER, THE APPROVED METHODS SHOWN MUST BE FOLLOWED AS CLOSELY AS POSSIBLE FOR BLOCKING, BRACING, AND STAYING OF THE DESIGNATED ITEMS.
- G. THE "LOAD AS SHOWN" FOR MOST OF THE FULL LOADS DEPICTED HEREIN IS BASED ON AN APPROXIMATE LADING WEIGHT OF 40,000 POUNDS. THE SPECIFIED BLOCKING AND BRACING FOR THE FULL LOADS IS ADEQUATE FOR THE RETENTION OF LOADS, UP TO 45,000 POUNDS, IF IT IS DESIRED TO INCREASE THE LADING WEIGHT.
- H. OTHER TYPES OF LADING ITEMS MAY BE LOADED ON A TRAILER WHICH IS PARTIALLY LOADED WITH THE DESIGNATED ITEM, PROVIDING THE TOTAL LOAD IS COMPATIBLE, EXISTING DIRECTIVES ARE NOT VIOLATED, AND THE OTHER LADING ITEMS ARE BLOCKED AND BRACED TO EQUAL THE BLOCKING AND BRACING CRITERIA SPECIFIED HEREIN.
- J. SOME LOADS ARE SHOWN IN TRAILERS HAVING ROUNDED CORNERS AT THE FORWARD END. IF THE CONVENTIONAL VAN TRAILER BEING USED IS EQUIPPED WITH A SQUARE FRONT OR WITH AN INSTALLED BULKHEAD, OMIT THE FORWARD BLOCKING ASSEMBLY, AND POSITION THE CONTAINERS DIRECTLY AGAINST THE FORWARD PORTION OF THE TRAILER.
- K. WHEN STEEL STRAPPING IS SEALED AT AN END-OVER-END LAP JOINT, A MINIMUM OF ONE SEAL WITH TWO PAIR OF NOTCHES WILL BE USED TO SEAL THE JOINT WHEN A NOTCH-TYPE SEALER IS BEING USED. A MINIMUM OF TWO SEALS, BUTTED TOGETHER WITH TWO PAIR OF CRIMPS PER SEAL WILL BE USED TO SEAL THE JOINT WHEN A CRIMP-TYPE SEALER IS BEING USED. REFER TO THE "END-OVER-END LAP JOINT DETAILS" ON PAGE 14 FOR GUIDANCE.
- L. A STAGGERED NAILING PATTERN WILL BE USED WHEREVER POSSIBLE WHEN NAILS ARE DRIVEN INTO JOINTS OF DUNNAGE ASSEMBLIES. ALSO, A STAGGERED NAILING PATTERN WILL BE USED WHEN DUNNAGE IS NAILED TO THE FLOOR OF THE TRANSPORTING VEHICLE, OR WHEN LAMINATING DUNNAGE. THE NAILING PATTERN WILL BE ADJUSTED AS REQUIRED SO THAT A NAIL DOES NOT PENETRATE INTO OR NEAR A CRACK BETWEEN FLOOR BOARDS. ADDITIONALLY, THE NAILING PATTERN FOR AN UPPER PIECE OF LAMINATED DUNNAGE WILL BE ADJUSTED AS REQUIRED SO THAT A NAIL FOR THAT PIECE WILL NOT BE DRIVEN THROUGH THE PIECE ONTO OR RIGHT BESIDE A NAIL IN A LOWER PIECE.
- M. POWER DRIVEN STAPLES MAY BE USED AS ALTERNATIVE FASTENERS FOR NAILS WHEN CONSTRUCTING DUNNAGE ASSEMBLIES THAT ARE TO BE USED IN THE DELINEATED TRAILER LOADS SHOWN THROUGHOUT THIS DRAWING. THE STAPLES TO BE USED MUST BE EQUAL IN LENGTH TO THE SPECIFIED NAIL SIZE AND MUST BE SUBSTITUTED ON A ONE STAPLE FOR ONE NAIL BASIS. STAPLES WHICH ARE 2-1/2" OR LESS IN LENGTH SHOULD BE IN ACCORDANCE WITH ASTM F1667 AS NEARLY AS PRACTICAL. STAPLES THAT ARE LONGER THAN 2-1/2" WILL BE A COMMERCIAL GRADE, OF A QUALITY EQUIVALENT TO THOSE MANUFACTURED BY SENCO PRODUCTS INCORPORATED. **NOTE:** STAPLES WILL NOT BE SUBSTITUTED FOR NAILS IN ANY LOAD RESTRAINING FLOOR DUNNAGE APPLICATION.
- N. THE UNBLOCKED SPACE ACROSS THE WIDTH OF A LOAD BAY IS NOT TO EXCEED 6". EXCESSIVE SLACK CAN BE ELIMINATED FROM A LOAD BY LAMINATING ADDITIONAL PIECES OF APPROPRIATE THICKNESS TO THE CRIB FILL ASSEMBLIES. NAIL EACH ADDITIONAL PIECE TO THE HORIZONTAL PIECE W/ APPROPRIATELY SIZED NAIL EVERY 12". ADDITIONALLY, THE THICKNESS AND QUANTITY OF THE LUMBER USED IN THESE ASSEMBLIES MAY BE ADJUSTED AS REQUIRED TO FACILITATE VARIANCE IN THE SIZE OF THE CONTAINER.
- O. **CAUTION:** WHEN POWER OR PNEUMATIC NAILERS ARE BEING USED IN THE APPLICATION OF NAILED FLOORLINE BLOCKING OR BRACING, CONTAINERS BEING LOADED INTO THE CONVEYANCE MUST BE POSITIONED TO ALLOW A CLEAR PATH OF EXIT FOR THE OPERATOR AT ALL TIMES, SHOULD AN EMERGENCY EXIT BECOME NECESSARY.
- P. IF THE SPACE AT THE REAR OF THE LOAD, BETWEEN THE CONTAINERS AND THE REAR DOOR MEASURES 1-1/2" OR LESS REAR BLOCKING IS NOT REQUIRED. IF THE SPACE AT THE REAR OF THE LOAD IS GREATER THAN 1-1/2" BUT LESS THAN 9". USE THE LAMINATED REAR BLOCKING AS DEPICTED ON PAGE 4. IF THE VOID AT THE REAR OF THE LOAD IS 9" OR GREATER, USE THE "REAR BLOCKING ASSEMBLY" AS SHOWN ON PAGE 15. **NOTE:** REAR BLOCKING ASSEMBLIES MAY BE REPLACED WITH NAILED HEADERS AT THE REAR OF THE LOAD, PROVIDED THE TRAILER IS CONFIGURED SUCH AS TO ALLOW NAILING IN THE AREA IN QUESTION. **CAUTION:** THE NAILED HEADER METHOD IS REQUIRED WHEN LOADING VAN TRAILERS EQUIPPED WITH ROLL-UP TYPE DOORS.
- Q. PORTIONS OF THE TRAILERS, SUCH AS SIDEWALLS, ENDWALLS, AND ROOFS, HAVE NOT BEEN SHOWN IN THE LOAD VIEWS FOR CLARITY PURPOSES.
- R. THESE PROCEDURES CAN ALSO BE UTILIZED FOR THE SHIPMENT OF CNU-660 CONTAINERS WHEN THEY ARE LOADED WITH AN ITEM OTHER THAN THE SPECIFIED BOMBS, OR WHEN THEY ARE EMPTY.
- S. DUNNAGE LUMBER SPECIFIED IS OF NOMINAL SIZE. FOR EXAMPLE, 1" X 4" MATERIAL IS ACTUALLY 3/4" THICK BY 3-1/2" WIDE AND 2" X 6" MATERIAL IS ACTUALLY 1-1/2" THICK BY 5-1/2" WIDE.
- T. CONVERSION TO METRIC EQUIVALENTS: DIMENSIONS WITHIN THIS DOCUMENT ARE EXPRESSED IN INCHES, AND WEIGHTS ARE EXPRESSED IN POUNDS. WHEN NECESSARY, THE METRIC EQUIVALENTS MAY BE COMPUTED ON THE BASIS OF ONE INCH EQUALS 25.4MM, AND ONE POUND EQUALS 0.454 KG.

(CONTINUED AT RIGHT)

MATERIAL SPECIFICATIONS

- LUMBER - - - - - : SEE TM 743-200-1 (DUNNAGE LUMBER) AND VOLUNTARY PRODUCT STANDARD PS 20.
- NAILS - - - - - : ASTM F1667; COMMON STEEL NAIL (NLCMS OR NLCMS).
- STRAPPING, STEEL - - : ASTM D3953; FLAT STRAPPING, TYPE 1, HEAVY DUTY, FINISH A, B (GRADE 2), OR C.
- SEAL, STRAP - - - - : ASTM D3953; CLASS H, FINISH A, B (GRADE 2), OR C, DOUBLE NOTCH TYPE, STYLE I, II, OR IV.
- ANTI-CHAFING MATERIAL - - - - - : MIL-PRF-121 (OR EQUAL); NEUTRAL BARRIER MATERIAL.
- WIRE, CARBON STEEL - - : ASTM A853; ANNEALED AT FINISH, BLACK OXIDE FINISH, 0.0800" DIA, GRADE 1006 OR BETTER.

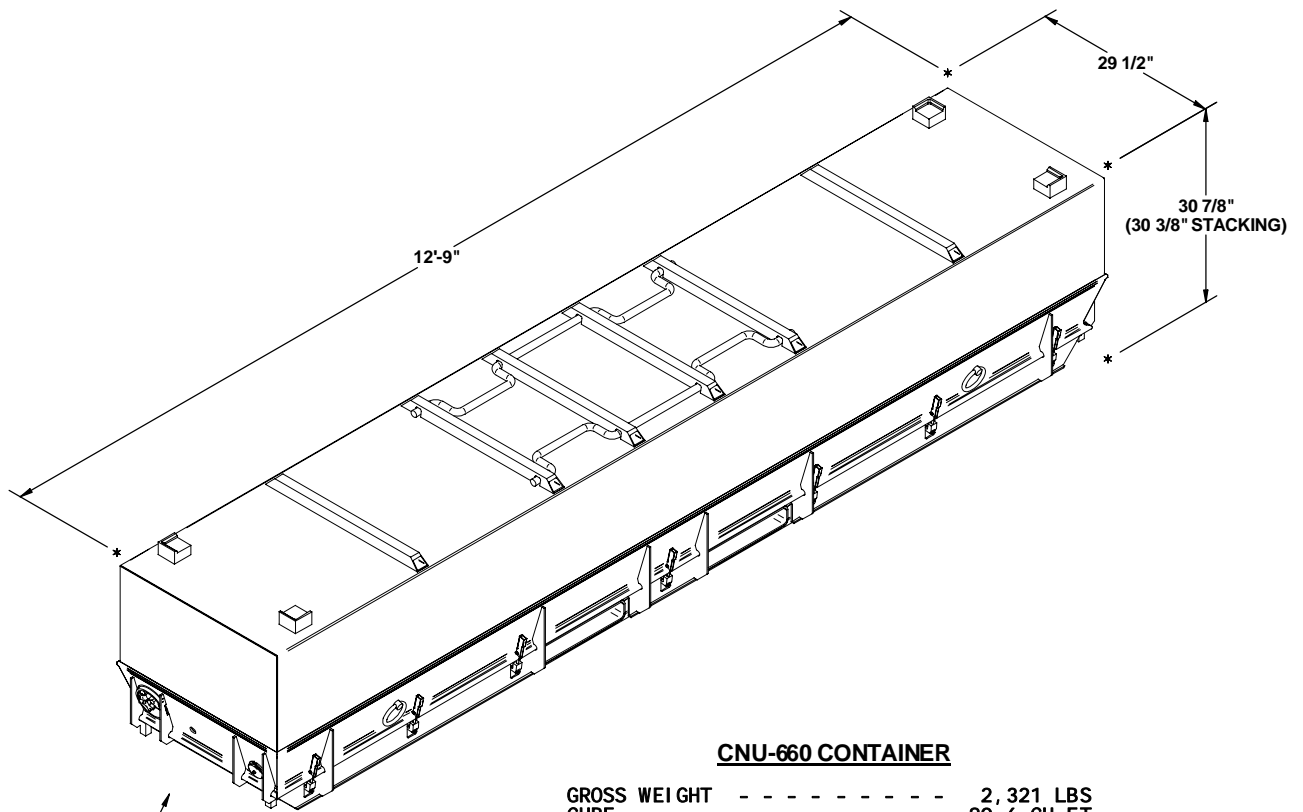

CNU-660 CONTAINER

GROSS WEIGHT - - - - - 2,321 LBS
 CUBE - - - - - 80.6 CU FT

FORWARD END OF CONTAINER.

UNITIZATION AND HANDLING GUIDANCE

(UNITIZATION AND HANDLING GUIDANCE CONTINUED)

1. STACKING CONTAINERS FOR LOADING:

- A. AN UPPER CONTAINER SHOULD BE PLACED AS CLOSE AS POSSIBLE IN VERTICAL ALIGNMENT WITH THE NEXT LOWER CONTAINER.
- B. POSITION THE FORWARD END OF AN UPPER CONTAINER ABOVE THE FORWARD END OF THE NEXT LOWER CONTAINER.
- C. THE CONTAINER SKIDS OF AN UPPER CONTAINER SHOULD BE FULLY SEATED AGAINST THE SKID LOCATOR PIECES ON THE COVER OF THE NEXT LOWER CONTAINER.


2. INSTALLATION OF UNITIZING STRAPS:

- A. STRAPS WILL BE POSITIONED SO AS TO ENCIRCLE THE CONTAINERS AND SO THAT THE STRAPPING LAYS FLAT AND STRAIGHT WITH THE BODY SURFACE OF THE CONTAINER; I.E., VERTICAL ALONG THE SIDES AND FLAT ACROSS THE TOP AND BOTTOM OF THE STACK.
- B. PLACE ANTI-CHAFING NEUTRAL BARRIER MATERIAL UNDER THE STRAPPING AT ALL POINTS OF CONTACT WITH THE CONTAINER AND SECURE TO PREVENT DISLODGE MENT DURING AND AFTER STRAP APPLICATION. STRIPS OF ANTI-CHAFING MATERIAL MAY BE TAPED OR STRING-TIED TO THE CONTAINER OR STRAPPING, OR IT CAN BE FORMED INTO STRAP ENCIRCLING TUBES BY WINDING THE MATERIAL AROUND THE STRAPPING TO FORM A SELF-HOLDING UNIT.
- C. STRAPPING WILL BE FIRMLY TENSIONED AND EACH END-OVER-END LAP JOINT WILL BE SEALED WITH TWO DOUBLE CRIMPED STRAP SEALS. SEE GENERAL NOTE "K" ON PAGE 2. THE LAP JOINTS WILL BE MADE ALONG THE SIDE OF THE STACK AS SHOWN. DURING STRAP TENSIONING, CARE SHOULD BE EXERCISED TO ENSURE THAT THE CONTAINERS ARE NOT DAMAGED. EXCESS STRAPPING (STRAP ENDS) SHOULD BE CUT OFF OR BROKEN OFF NEAR THE JOINT SEALS.

3. CONTAINER OR CONTAINER STACK HANDLING:

- A. ONLY APPROVED AND APPROPRIATELY SIZED MATERIALS HANDLING EQUIPMENT WILL BE USED FOR HANDLING THE DEPICTED CONTAINERS. APPROVED MATERIAL HANDLING EQUIPMENT (FORKLIFT TRUCKS, CRANES, HAND TRUCKS, DOLLIES, ROLLER ASSEMBLIES, SLINGS, SPREADER BARS, ETC.) IS SPECIFIED ELSEWHERE.
- B. PRECAUTIONARY HANDLING TECHNIQUES NORMALLY EMPLOYED OR AS SPECIFIED FOR THE TYPE OF COMMODITY INVOLVED WILL BE OBSERVED.
- C. IF HANDLING IS ACCOMPLISHED WITH A FORKLIFT TRUCK, THE CONTAINERS SHOULD BE HANDLED FROM A SIDE POSITION AS MUCH AS POSSIBLE. CARE MUST BE EXERCISED WHEN INSERTING FORKS UNDER A CONTAINER, TO PREVENT DAMAGE TO THE CONTAINER BY THE FORK TINES OR THE FORKLIFT PACKAGE GUARD. IF ONE CONTAINER IS HANDLED BY SLINGING, THE SLING MAY BE ATTACHED TO THE LIFTING POINTS ON THE CONTAINER. DO NOT HANDLE STACKED CONTAINERS WITH A SLING.

(CONTINUED AT RIGHT)

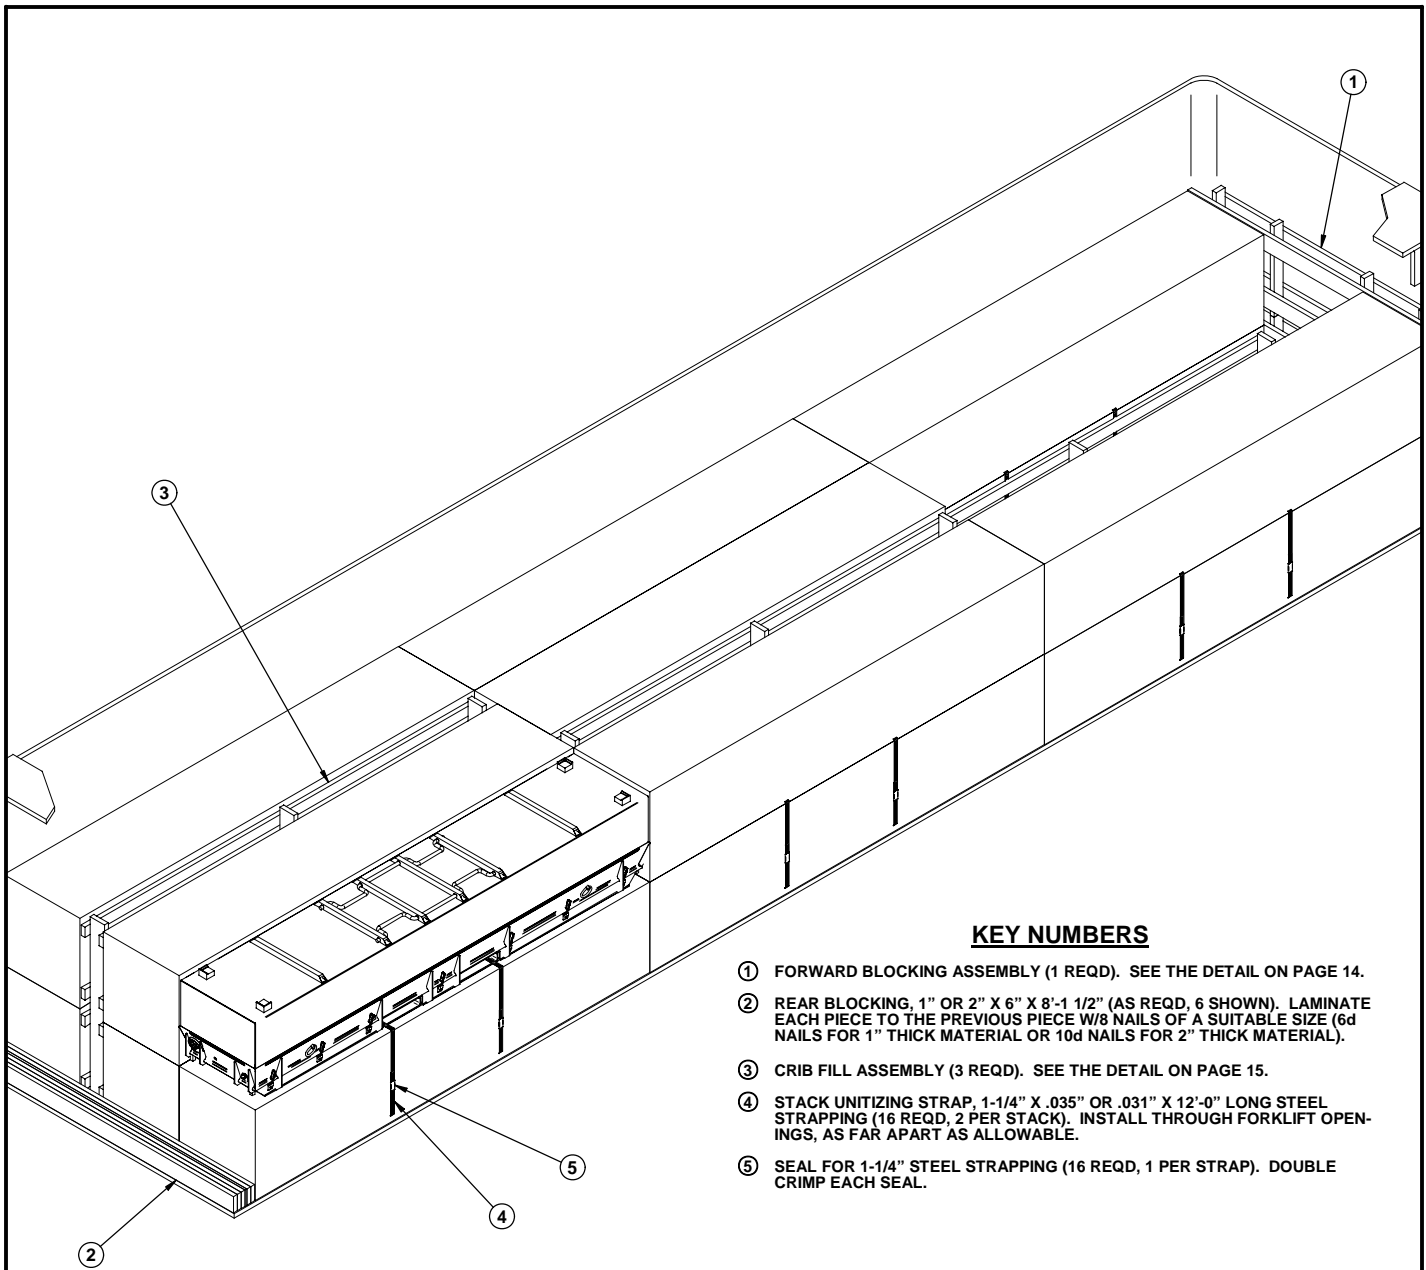

ISOMETRIC VIEW

KEY NUMBERS

- ① FORWARD BLOCKING ASSEMBLY (1 REQD). SEE THE DETAIL ON PAGE 14.
- ② REAR BLOCKING, 1" OR 2" X 6" X 8'-1 1/2" (AS REQD, 6 SHOWN). LAMINATE EACH PIECE TO THE PREVIOUS PIECE W/8 NAILS OF A SUITABLE SIZE (6d NAILS FOR 1" THICK MATERIAL OR 10d NAILS FOR 2" THICK MATERIAL).
- ③ CRIB FILL ASSEMBLY (3 REQD). SEE THE DETAIL ON PAGE 15.
- ④ STACK UNITIZING STRAP, 1-1/4" X .035" OR .031" X 12'-0" LONG STEEL STRAPPING (16 REQD, 2 PER STACK). INSTALL THROUGH FORKLIFT OPENINGS, AS FAR APART AS ALLOWABLE.
- ⑤ SEAL FOR 1-1/4" STEEL STRAPPING (16 REQD, 1 PER STRAP). DOUBLE CRIMP EACH SEAL.

BILL OF MATERIAL

LUMBER	LINEAR FEET	BOARD FEET
1" X 6"	9	5
2" X 4"	275	184
2" X 6"	139	139
NAI LS	NO. REQD	POUNDS
6d (2")	8	NIL
10d (3")	308	4 3/4
STEEL STRAPPING, 1-1/4" - 192' REQD	- - -	28 LBS
SEAL FOR 1-1/4" STRAPPING - 18 REQD	- - -	3/4 LBS
ANTI-CHAFING MATERIAL - - - AS REQD	- - -	NIL


LOAD AS SHOWN

ITEM	QUANTITY	WEIGHT (APPROX)
CNU-660 CONTAINER	17	39,457 LBS
DUNNAGE	- - - - -	690 LBS

TOTAL WEIGHT - - - - - 40,147 LBS (APPROX)

SPECIAL NOTES:

1. A 40'-0" LONG BY 8'-2" WIDE (INSIDE DIMENSION) CONVENTIONAL VAN TRAILER IS SHOWN. TRAILERS OF OTHER DIMENSIONS CAN BE USED.
2. A TRAILER EQUIPPED WITH ROUNDED FRONT CORNERS IS SHOWN. IF THE TRAILER TO BE LOADED HAS A SQUARE FRONT, OMIT THE FORWARD BLOCKING ASSEMBLY AND POSITION THE CONTAINERS DIRECTLY AGAINST THE TRAILER FRONT WALL.
3. IF THE SPACE AT THE REAR OF THE LOAD, BETWEEN THE CONTAINERS AND THE REAR DOOR MEASURES 1-1/2" OR LESS REAR BLOCKING IS NOT REQUIRED. IF THE SPACE AT THE REAR OF THE LOAD IS GREATER THAN 1-1/2" BUT LESS THAN 9", USE THE LAMINATED REAR BLOCKING AS DEPICTED ON PAGE 4. IF THE VOID AT THE REAR OF THE LOAD IS 9" OR GREATER, USE THE "REAR BLOCKING ASSEMBLY" AS SHOWN ON PAGE 15. **NOTE:** REAR BLOCKING ASSEMBLIES MAY BE REPLACED WITH NAILED HEADERS AT THE REAR OF THE LOAD, PROVIDED THE TRAILER IS CONFIGURED SUCH AS TO ALLOW NAILING IN THE AREA IN QUESTION. **CAUTION:** THE NAILED HEADER METHOD IS REQUIRED WHEN LOADING VAN TRAILERS EQUIPPED WITH ROLL-UP TYPE DOORS.
4. ALTERNATE THE POSITION OF THE LATERAL VOID IN THE LOAD TO ENSURE A UNIFORM LOAD, AS DEPICTED IN THE LOAD ON PAGE 4.
5. THE DEPICTED LOAD CAN BE ADJUSTED TO SUIT THE QUANTITY TO BE SHIPPED, OR TO SUIT THE WEIGHT OF THE UNIT BEING LOADED.

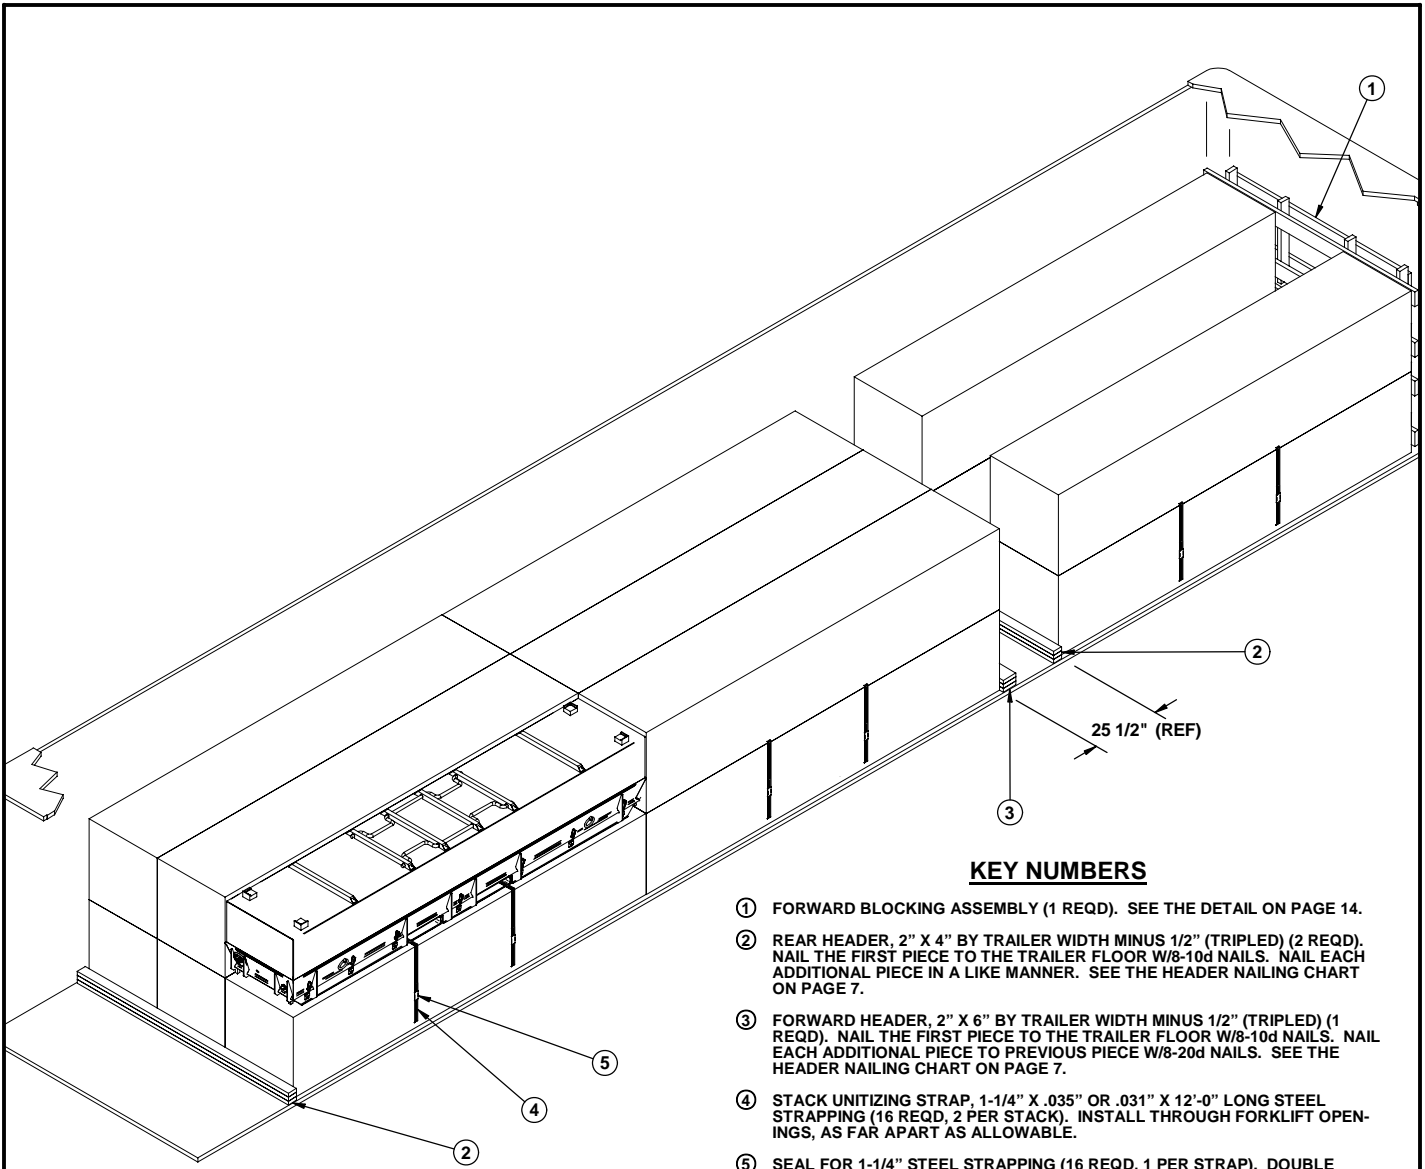

ISOMETRIC VIEW

KEY NUMBERS

- ① FORWARD BLOCKING ASSEMBLY (1 REQD). SEE THE DETAIL ON PAGE 14.
- ② REAR HEADER, 2" X 4" BY TRAILER WIDTH MINUS 1/2" (TRIPLED) (2 REQD). NAIL THE FIRST PIECE TO THE TRAILER FLOOR W/8-10d NAILS. NAIL EACH ADDITIONAL PIECE IN A LIKE MANNER. SEE THE HEADER NAILING CHART ON PAGE 7.
- ③ FORWARD HEADER, 2" X 6" BY TRAILER WIDTH MINUS 1/2" (TRIPLED) (1 REQD). NAIL THE FIRST PIECE TO THE TRAILER FLOOR W/8-10d NAILS. NAIL EACH ADDITIONAL PIECE TO PREVIOUS PIECE W/8-20d NAILS. SEE THE HEADER NAILING CHART ON PAGE 7.
- ④ STACK UNITIZING STRAP, 1-1/4" X .035" OR .031" X 12'-0" LONG STEEL STRAPPING (16 REQD, 2 PER STACK). INSTALL THROUGH FORKLIFT OPENINGS, AS FAR APART AS ALLOWABLE.
- ⑤ SEAL FOR 1-1/4" STEEL STRAPPING (16 REQD, 1 PER STRAP). DOUBLE CRIMP EACH SEAL.

BILL OF MATERIAL

LUMBER	LINEAR FEET	BOARD FEET
2" X 4"	67	45
2" X 6"	79	79
NAILS	NO. REQD	POUNDS
10d (3")	152	2 1/2
20d (4")	16	3/4
STEEL STRAPPING, 1-1/4" - 192'	REQD	- - - 28 LBS
SEAL FOR 1-1/4" STRAPPING - 18	REQD	- - - 3/4 LBS
ANTI-CHAFING MATERIAL - - -	AS REQD	- - - NIL

LOAD AS SHOWN

ITEM	QUANTITY	WEIGHT (APPROX)
CNU-660 CONTAINER	- - 17 - - - - -	39,457 LBS
DUNNAGE	- - - - -	280 LBS

TOTAL WEIGHT - - - - - 39,737 LBS (APPROX)

FORWARD HEADER NAILING CHART*	
# NAILS	MAX. LOAD WEIGHT (LBS)
3	15,000
4	20,000
5	25,000
6	30,000
7	35,000
8	40,000
9	45,000


* HEADERS AT THE FRONT END OF A LOAD OR AT THE FRONT END OF A DIVIDED LOAD WILL BE TRIPLED 2" X 6" MATERIAL. THE NUMBER OF NAILS INDICATED ABOVE REFERS TO THE NUMBER OF NAILS USED IN EACH LAMINATION OF A HEADER, FOR EXAMPLE 8 NAILS MEANS THE FIRST BOARD IS NAILED TO THE TRAILER FLOOR W/8-10d NAILS, THE SECOND BOARD IS LAMINATED TO THE FIRST W/8-20d NAILS, AND THE THIRD BOARD IS LAMINATED TO THE SECOND W/8-20d NAILS, FOR A TOTAL OF 8-10d AND 16-20d NAILS PER HEADER.

REAR HEADER NAILING CHART^	
# NAILS	MAX. LOAD WEIGHT (LBS)
6	15,000
7	17,500
8	20,000
9	22,500
10	25,000
11	27,500
12	30,000
13	32,500
14	35,000
15	37,500
16	40,000
17	42,500
18	45,000

^HEADERS AT THE REAR OF A FULL LOAD OR AT THE REAR END OF A DIVIDED LOAD WILL BE TRIPLED 2" X 4" MATERIAL. THE NUMBER OF NAILS INDICATED ABOVE REFERS TO THE NUMBER OF NAILS USED IN EACH LAMINATION OF A HEADER, FOR EXAMPLE 8 NAILS MEANS THE FIRST BOARD IS NAILED TO THE TRAILER FLOOR W/8-10d NAILS, THE SECOND BOARD IS LAMINATED TO THE FIRST W/8-10d NAILS, AND THE THIRD BOARD IS LAMINATED TO THE SECOND W/8-10d NAILS, FOR A TOTAL OF 24-10d NAILS. NOTE: REAR HEADERS MAY BE HANDLED IN THE SAME MANNER AS FORWARD HEADERS, USING 2" X 6" MATERIAL WITH 10d AND 20d NAILS, IF DESIRED

SPECIAL NOTES:

1. A 45'-0" LONG BY 7'-8" WIDE (INSIDE DIMENSION) CONVENTIONAL VAN TRAILER IS SHOWN. TRAILERS OF OTHER DIMENSIONS CAN BE USED.
2. A TRAILER EQUIPPED WITH ROUNDED FRONT CORNERS IS SHOWN. IF THE TRAILER TO BE LOADED HAS A SQUARE FRONT, OMIT THE FORWARD BLOCKING ASSEMBLY AND POSITION THE CONTAINERS DIRECTLY AGAINST THE TRAILER FRONT WALL.
3. IF THE SPACE AT THE REAR OF THE LOAD, BETWEEN THE CONTAINERS AND THE REAR DOOR MEASURES 1-1/2" OR LESS REAR BLOCKING IS NOT REQUIRED. IF THE SPACE AT THE REAR OF THE LOAD IS GREATER THAN 1-1/2" BUT LESS THAN 9", USE THE LAMINATED REAR BLOCKING AS DEPICTED ON PAGE 4. IF THE VOID AT THE REAR OF THE LOAD IS 9" OR GREATER, USE THE "REAR BLOCKING ASSEMBLY" AS SHOWN ON PAGE 15. NOTE: REAR BLOCKING ASSEMBLIES MAY BE REPLACED WITH NAILED HEADERS AT THE REAR OF THE LOAD, PROVIDED THE TRAILER IS CONFIGURED SUCH AS TO ALLOW NAILING IN THE AREA IN QUESTION. CAUTION: THE NAILED HEADER METHOD IS REQUIRED WHEN LOADING VAN TRAILERS EQUIPPED WITH ROLL-UP TYPE DOORS.
4. THE DEPICTED LOAD CAN BE ADJUSTED TO SUIT THE QUANTITY TO BE SHIPPED, OR TO SUIT THE WEIGHT OF THE UNIT BEING LOADED.

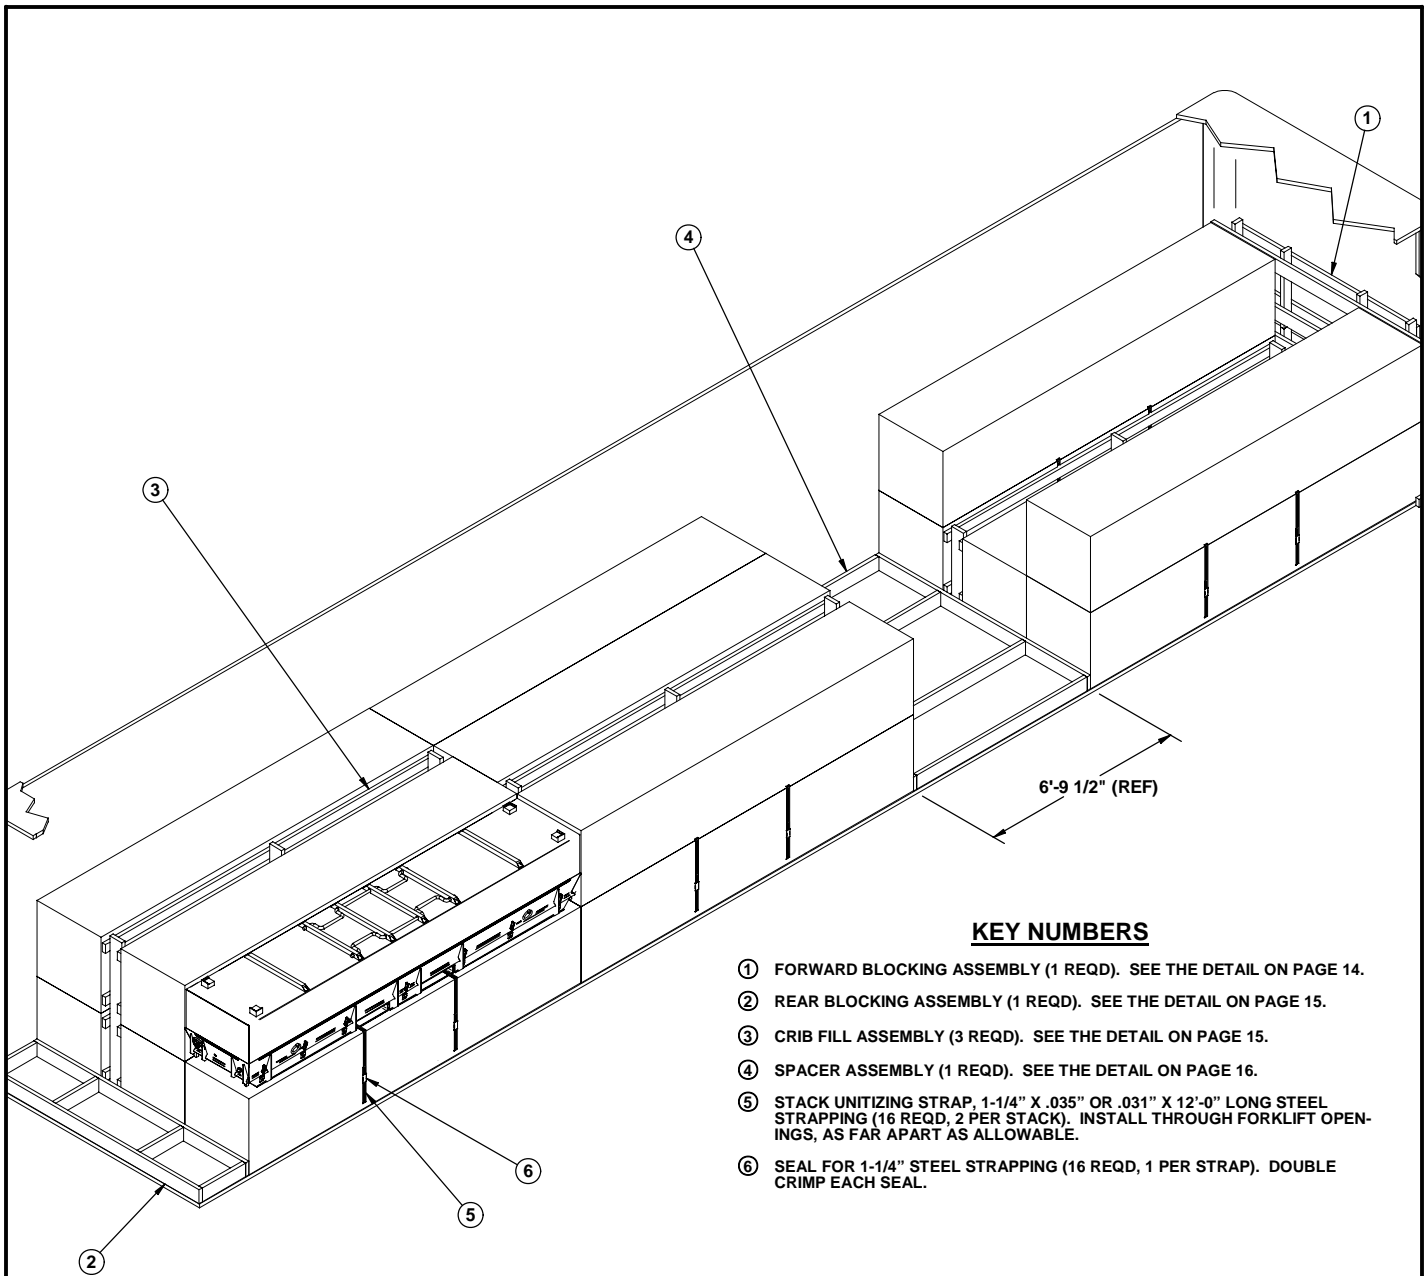

ISOMETRIC VIEW

KEY NUMBERS

- ① FORWARD BLOCKING ASSEMBLY (1 REQD). SEE THE DETAIL ON PAGE 14.
- ② REAR BLOCKING ASSEMBLY (1 REQD). SEE THE DETAIL ON PAGE 15.
- ③ CRIB FILL ASSEMBLY (3 REQD). SEE THE DETAIL ON PAGE 15.
- ④ SPACER ASSEMBLY (1 REQD). SEE THE DETAIL ON PAGE 16.
- ⑤ STACK UNITIZING STRAP, 1-1/4" X .035" OR .031" X 12'-0" LONG STEEL STRAPPING (16 REQD, 2 PER STACK). INSTALL THROUGH FORKLIFT OPENINGS, AS FAR APART AS ALLOWABLE.
- ⑥ SEAL FOR 1-1/4" STEEL STRAPPING (16 REQD, 1 PER STRAP). DOUBLE CRIMP EACH SEAL.

BILL OF MATERIAL

LUMBER	LINEAR FEET	BOARD FEET
2" X 4"	275	184
2" X 6"	163	163
NAI LS	NO. REQD	POUNDS
10d (3")	324	5
STEEL STRAPPING, 1-1/4" - 192' REQD	- - -	28 LBS
SEAL FOR 1-1/4" STRAPPING - 18 REQD	- - -	3/4 LBS
ANTI-CHAFING MATERIAL - - - AS REQD	- - -	NIL


LOAD AS SHOWN

ITEM	QUANTITY	WEIGHT (APPROX)
CNU-660 CONTAINER - - - - -	17 - - - - -	39,457 LBS
DUNNAGE - - - - -	- - - - -	728 LBS

TOTAL WEIGHT - - - - - 40,185 LBS (APPROX)

SPECIAL NOTES:

1. A 48'-0" LONG BY 8'-2" WIDE (INSIDE DIMENSION) CONVENTIONAL VAN TRAILER IS SHOWN. TRAILERS OF OTHER DIMENSIONS CAN BE USED.
2. A TRAILER EQUIPPED WITH ROUNDED FRONT CORNERS IS SHOWN. IF THE TRAILER TO BE LOADED HAS A SQUARE FRONT, OMIT THE FORWARD BLOCKING ASSEMBLY AND POSITION THE CONTAINERS DIRECTLY AGAINST THE TRAILER FRONT WALL.
3. IF THE SPACE AT THE REAR OF THE LOAD, BETWEEN THE CONTAINERS AND THE REAR DOOR MEASURES 1-1/2" OR LESS REAR BLOCKING IS NOT REQUIRED. IF THE SPACE AT THE REAR OF THE LOAD IS GREATER THAN 1-1/2" BUT LESS THAN 9", USE THE LAMINATED REAR BLOCKING AS DEPICTED ON PAGE 4. IF THE VOID AT THE REAR OF THE LOAD IS 9" OR GREATER, USE THE "REAR BLOCKING ASSEMBLY" AS SHOWN ON PAGE 15. **NOTE:** REAR BLOCKING ASSEMBLIES MAY BE REPLACED WITH NAILED HEADERS AT THE REAR OF THE LOAD, PROVIDED THE TRAILER IS CONFIGURED SUCH AS TO ALLOW NAILING IN THE AREA IN QUESTION. **CAUTION:** THE NAILED HEADER METHOD IS REQUIRED WHEN LOADING VAN TRAILERS EQUIPPED WITH ROLL-UP TYPE DOORS.
4. ALTERNATE THE POSITION OF THE LATERAL VOID IN THE LOAD TO ENSURE A UNIFORM LOAD, AS DEPICTED IN THE LOAD ON PAGE 8.
5. THE DEPICTED LOAD CAN BE ADJUSTED TO SUIT THE QUANTITY TO BE SHIPPED, OR TO SUIT THE WEIGHT OF THE UNIT BEING LOADED.

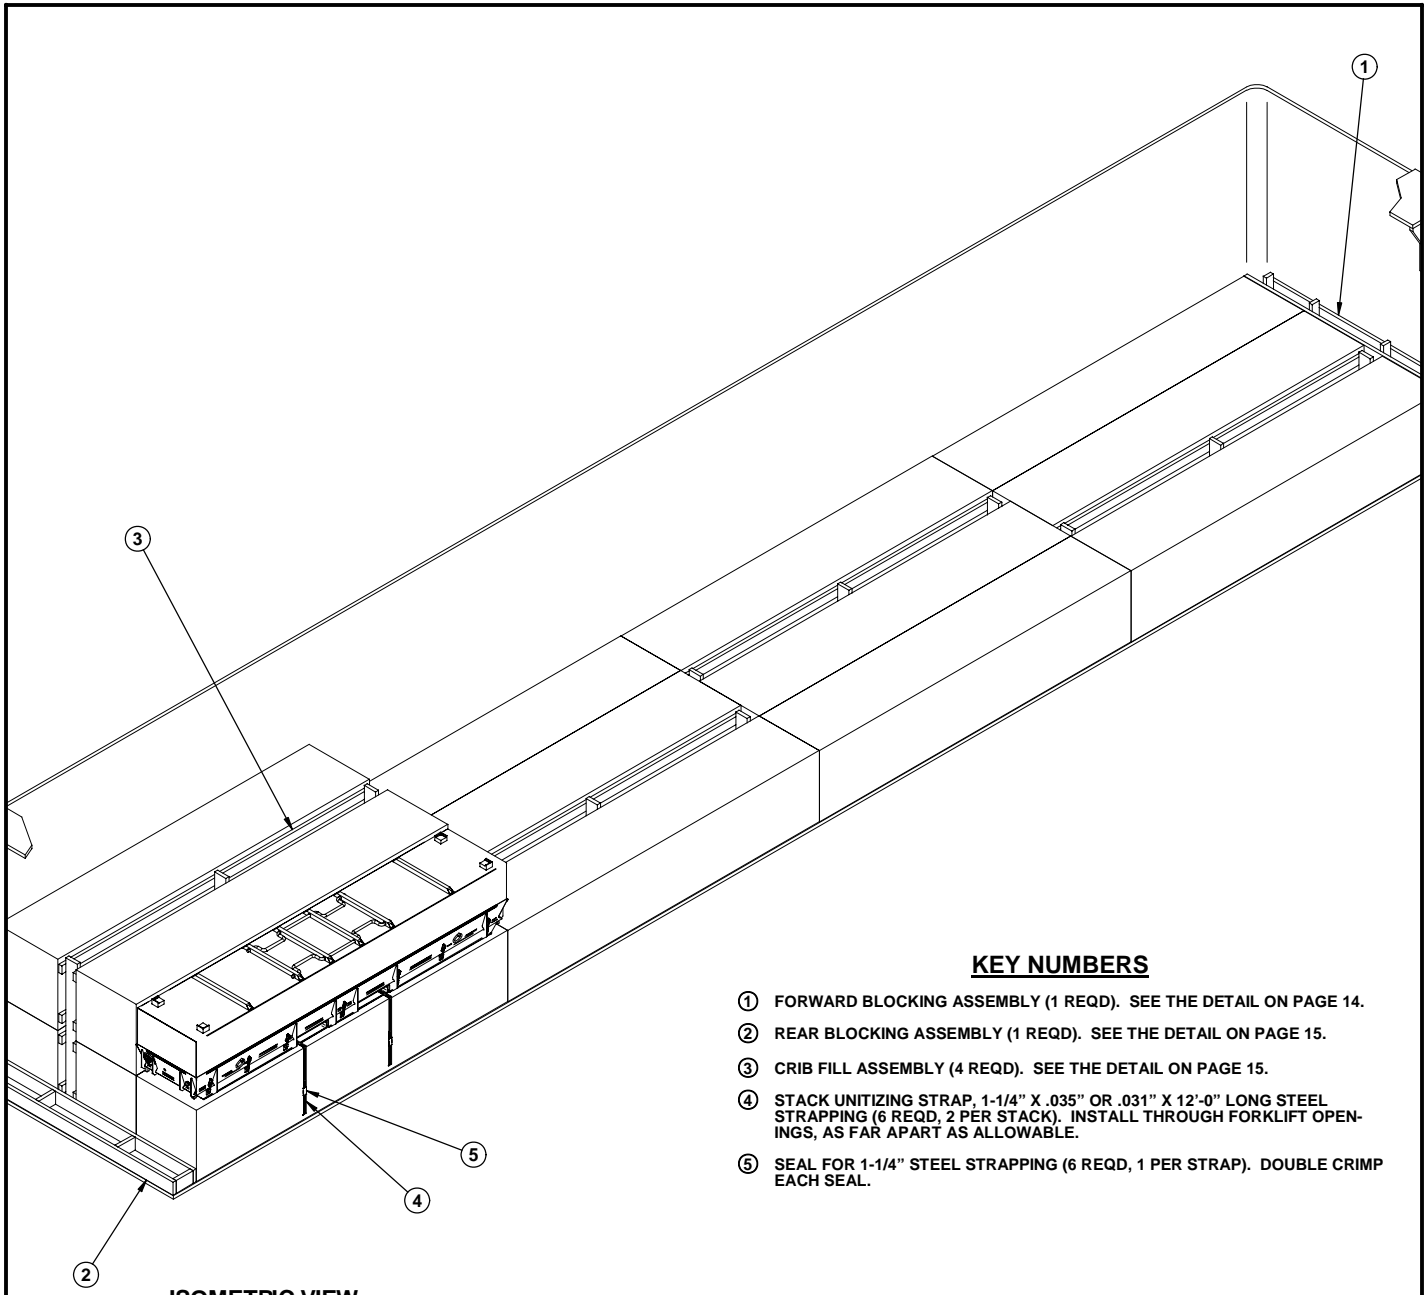

ISOMETRIC VIEW

KEY NUMBERS

- ① FORWARD BLOCKING ASSEMBLY (1 REQD). SEE THE DETAIL ON PAGE 14.
- ② REAR BLOCKING ASSEMBLY (1 REQD). SEE THE DETAIL ON PAGE 15.
- ③ CRIB FILL ASSEMBLY (4 REQD). SEE THE DETAIL ON PAGE 15.
- ④ STACK UNITIZING STRAP, 1-1/4" X .035" OR .031" X 12'-0" LONG STEEL STRAPPING (6 REQD, 2 PER STACK). INSTALL THROUGH FORKLIFT OPENINGS, AS FAR APART AS ALLOWABLE.
- ⑤ SEAL FOR 1-1/4" STEEL STRAPPING (6 REQD, 1 PER STRAP). DOUBLE CRIMP EACH SEAL.

BILL OF MATERIAL


LUMBER	LINEAR FEET	BOARD FEET
2" X 4"	265	177
2" X 6"	87	87
NAI LS	NO. REQD	POUNDS
10d (3")	252	4
STEEL STRAPPING, 1-1/4" - 72' REQD	- - -	10 LBS
SEAL FOR 1-1/4" STRAPPING - 6 REQD	- - -	1/4 LBS
ANTI-CHAFING MATERIAL - - - AS REQD	- - -	NIL

LOAD AS SHOWN

ITEM	QUANTITY	WEIGHT (APPROX)
CNU-660 CONTAINER	15	34,815 LBS
DUNNAGE	- - - - -	543 LBS
TOTAL WEIGHT		35,358 LBS (APPROX)

SPECIAL NOTES:

1. A 53'-0" LONG BY 8'-2" WIDE (INSIDE DIMENSION) CONVENTIONAL VAN TRAILER IS SHOWN. TRAILERS OF OTHER DIMENSIONS CAN BE USED.
2. A TRAILER EQUIPPED WITH ROUNDED FRONT CORNERS IS SHOWN. IF THE TRAILER TO BE LOADED HAS A SQUARE FRONT, OMIT THE FORWARD BLOCKING ASSEMBLY AND POSITION THE CONTAINERS DIRECTLY AGAINST THE TRAILER FRONT WALL.
3. IF THE SPACE AT THE REAR OF THE LOAD, BETWEEN THE CONTAINERS AND THE REAR DOOR MEASURES 1-1/2" OR LESS REAR BLOCKING IS NOT REQUIRED. IF THE SPACE AT THE REAR OF THE LOAD IS GREATER THAN 1-1/2" BUT LESS THAN 9", USE THE LAMINATED REAR BLOCKING AS DEPICTED ON PAGE 4. IF THE VOID AT THE REAR OF THE LOAD IS 9" OR GREATER, USE THE "REAR BLOCKING ASSEMBLY" AS SHOWN ON PAGE 15. **NOTE:** REAR BLOCKING ASSEMBLIES MAY BE REPLACED WITH NAILED HEADERS AT THE REAR OF THE LOAD, PROVIDED THE TRAILER IS CONFIGURED SUCH AS TO ALLOW NAILING IN THE AREA IN QUESTION. **CAUTION:** THE NAILED HEADER METHOD IS REQUIRED WHEN LOADING VAN TRAILERS EQUIPPED WITH ROLL-UP TYPE DOORS.
4. ALTERNATE THE POSITION OF THE LATERAL VOID IN THE LOAD TO ENSURE A UNIFORM LOAD, AS DEPICTED IN THE LOAD ON PAGE 10.
5. THE DEPICTED LOAD CAN BE ADJUSTED TO SUIT THE QUANTITY TO BE SHIPPED, OR TO SUIT THE WEIGHT OF THE UNIT BEING LOADED.

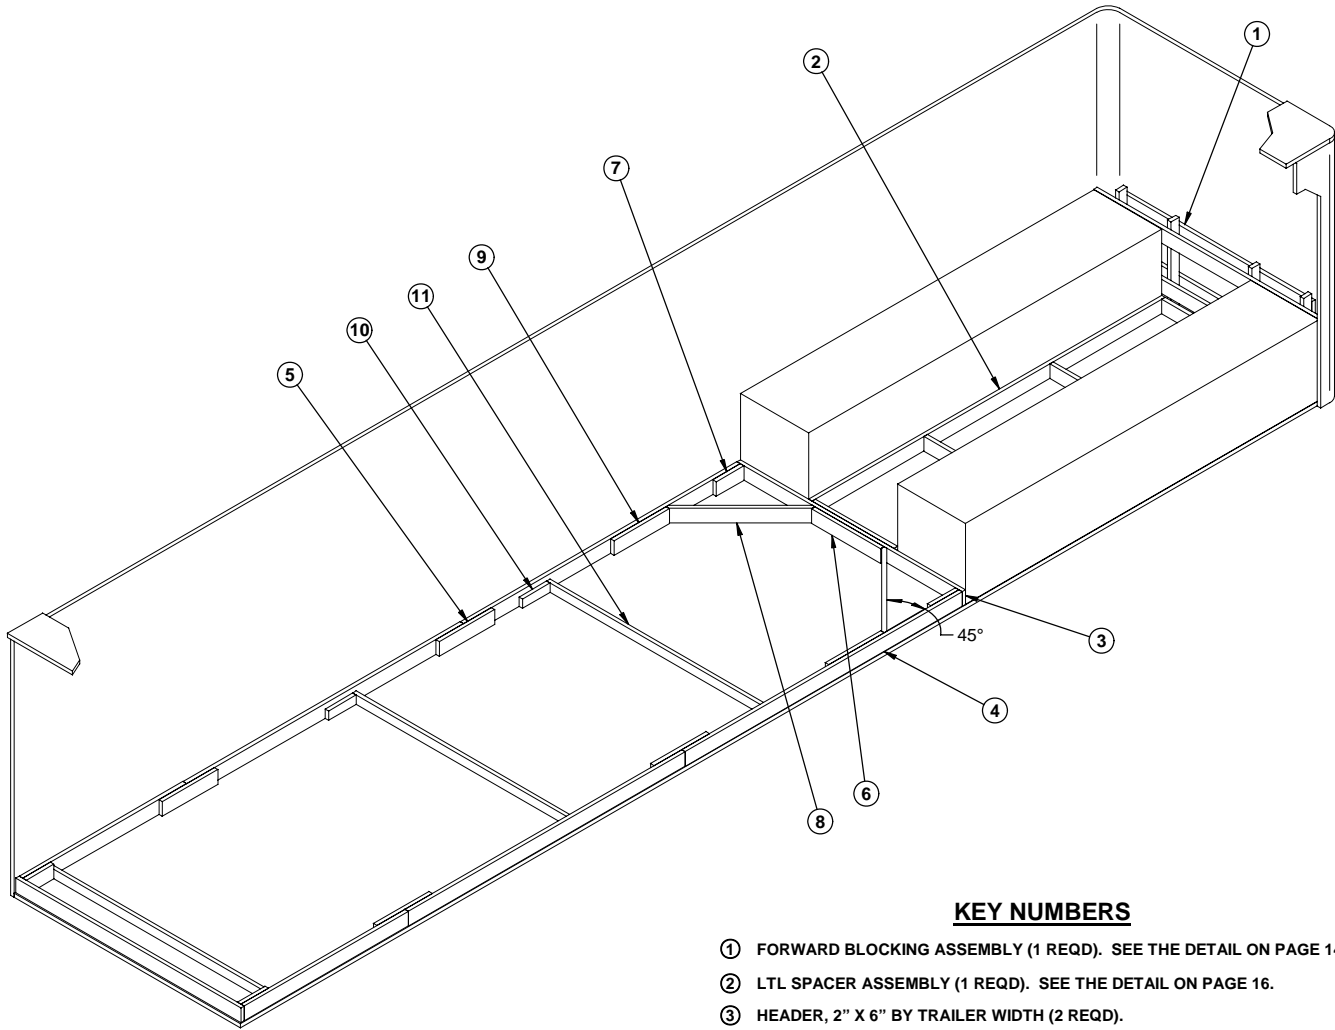

ISOMETRIC VIEW


KEY NUMBERS

- ① FORWARD BLOCKING ASSEMBLY (1 REQD). SEE THE DETAIL ON PAGE 14.
- ② LTL SPACER ASSEMBLY (1 REQD). SEE THE DETAIL ON PAGE 16.
- ③ HEADER, 2" X 6" BY TRAILER WIDTH (2 REQD).
- ④ SIDE STRUT, 2" X 6" BY CUT-TO-FIT BETWEEN THE FORWARD AND REAR HEADERS (AS REQD). SEE SPECIAL NOTE 3 AT LEFT.
- ⑤ SPLICE PIECE, 2" X 6" X 24" (AS REQD). CENTER ON THE JOINT OF THE SIDE STRUTS AND NAIL W/4-10d NAILS AT EACH END. SEE SPECIAL NOTE 3 AT LEFT.
- ⑥ CENTER CLEAT, 2" X 6" X 30" (1 REQD). NAIL TO THE FORWARD HEADER W/6-10d NAILS.
- ⑦ POCKET CLEAT, 2" X 6" X 12" (4 REQD). NAIL TO A SIDE STRUT W/5-10d NAILS AND TOENAIL TO THE HEADER W/3-12d NAILS.
- ⑧ DIAGONAL BRACE, 2" X 6" BY CUT-TO-FIT (2 REQD). DOUBLE BEVEL EACH END WITH 45° CUTS. INSTALL AS SHOWN AND TOENAIL TO THE HEADER AND THE SIDE STRUT W/2-16d NAILS AT EACH END.
- ⑨ BACK-UP CLEAT, 2" X 6" X 24" (2 REQD). POSITION ON THE SIDE STRUT TO HOLD THE DIAGONAL BRACE IN PLACE AND NAIL TO THE SIDE STRUT W/8-10d NAILS.
- ⑩ STRUT BRACE CLEAT, 2" X 4" X 12" (AS REQD). NAIL TO THE SIDE STRUT W/3-10d NAILS. SEE SPECIAL NOTE 3 AT LEFT.
- ⑪ STRUT BRACE, 2" X 4" BY TRAILER WIDTH MINUS 3" (CUT-TO-FIT) (MINIMUM OF ONE REQD). NAIL TO THE POCKET CLEATS AND/OR STRUT BRACE CLEATS W/2-12d NAILS AT EACH END. SEE SPECIAL NOTE 3 AT LEFT.

SPECIAL NOTES:

- 1. A 2-UNIT LOAD IS SHOWN IN AN 8'-2" WIDE (INSIDE DIMENSION) VAN TRAILER. TRAILERS OF OTHER WIDTHS CAN BE USED.
- 2. A TRAILER EQUIPPED WITH ROUNDED FRONT CORNERS IS SHOWN. IF THE TRAILER TO BE LOADED HAS A SQUARE FRONT, OMIT THE FORWARD BLOCKING ASSEMBLY AND POSITION THE CONTAINERS DIRECTLY AGAINST THE TRAILER FRONT WALL.
- 3. DEPENDING ON THE NUMBER OF UNITS BEING LOADED, EACH OF THE SIDE STRUTS MAY NEED TO BE FORMED FROM MORE THAN ONE PIECE OF MATERIAL. IF SUCH IS THE CASE, THE SIDE STRUTS MUST BE SPLICED. SPLICING CAN BE ACCOMPLISHED BY CENTERING A 2" X 6" X 24" PIECE ON THE JOINT OF THE SIDE STRUTS AND NAILING IT TO THE SIDE STRUTS W/4-10d NAILS AT EACH END. IF DESIRED, THE STRUT BRACE PIECE(S) MAY BE NAILED TO THE SPLICE PIECES IN LIEU OF USING ADDITIONAL STRUT BRACE CLEATS.
- 4. ALL LTL LOADS, REGARDLESS OF THEIR SIZE, REQUIRE ONE STRUT BRACE POSITIONED AT THE REAR OF THE TRAILER AND NAILED TO THE POCKET CLEAT. IF THE SIDE STRUTS ARE LONGER THAN 7'-0", AN ADDITIONAL STRUT BRACE AND TWO STRUT BRACE CLEATS MUST BE APPLIED FOR EVERY 7'-0" OF SIDE STRUT LENGTH.
- 5. THE "K-BRACE" BLOCKING IS ADEQUATE FOR RETAINING A MAXIMUM LTL LOAD OF 20,000 POUNDS.
- 6. TRAILERS EQUIPPED WITH ROLL-UP TYPE DOORS MAY BE USED; HOWEVER, THE NAILED-HEADER METHOD OF REAR BLOCKING MUST BE INSTALLED IN LIEU OF THE "K-BRACE" TYPE BLOCKING. REFER TO THE LOAD ON PAGE 6 FOR GUIDANCE. NOTE THAT THE NAILED-HEADER METHOD OF REAR BLOCKING MAY ALSO BE USED IN TRAILERS EQUIPPED WITH HINGED DOORS AND NAILABLE FLOORS, AND MAY BE USED IN LIEU OF THE "K-BRACE" PIECES WHICH APPLY TO TRAILERS HAVING NON-NAILABLE FLOORS.

TYPICAL LTL (2 UNIT LOAD)

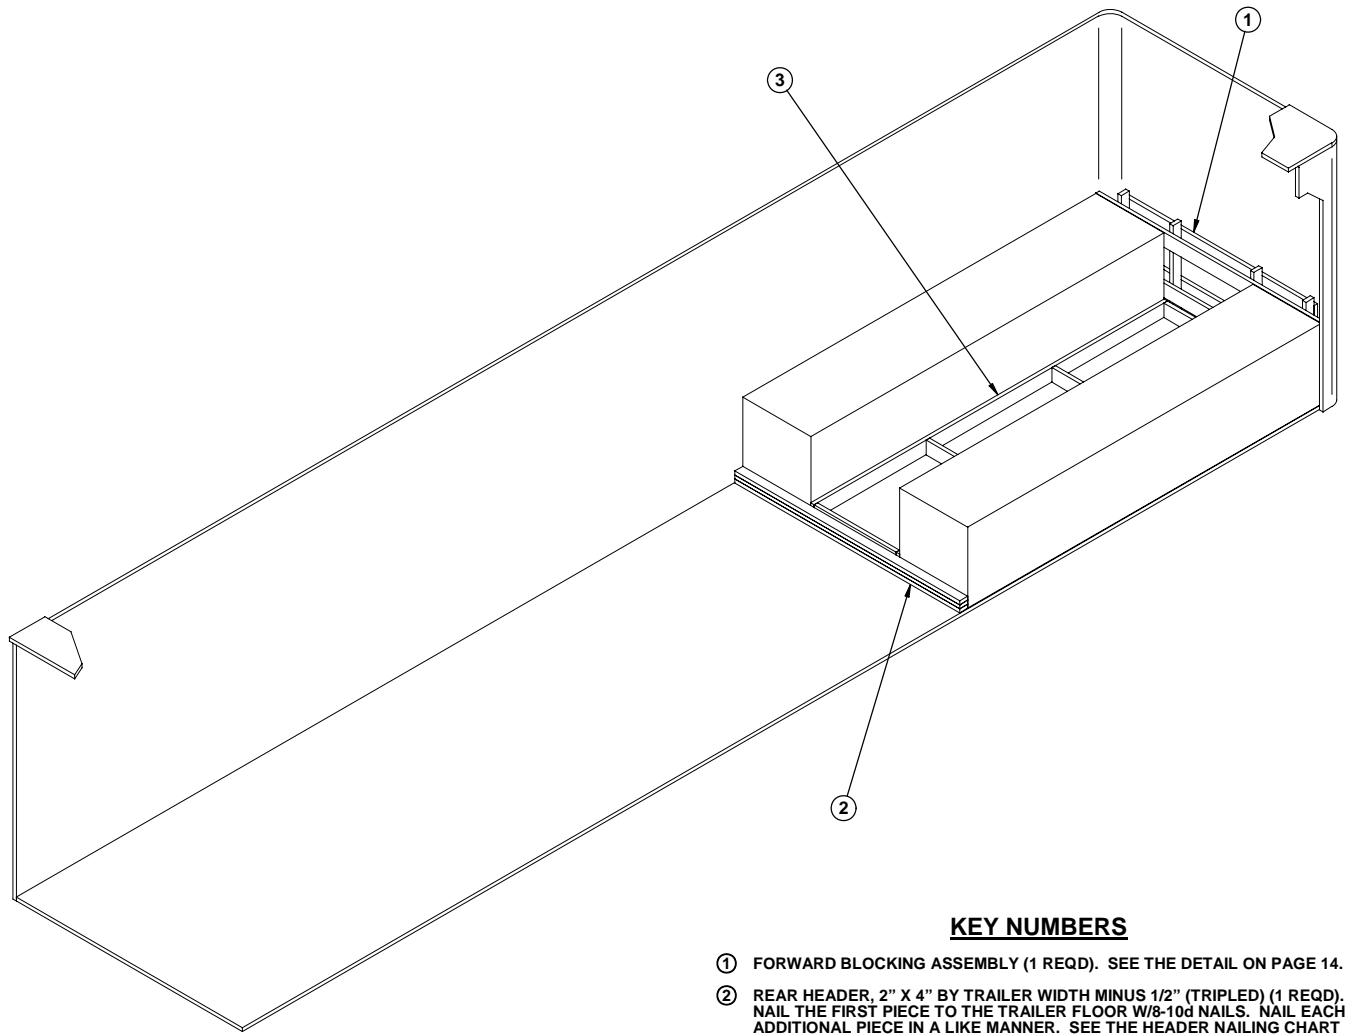


ISOMETRIC VIEW

KEY NUMBERS

- ① FORWARD BLOCKING ASSEMBLY (1 REQD). SEE THE DETAIL ON PAGE 14.
- ② REAR HEADER, 2" X 4" BY TRAILER WIDTH MINUS 1/2" (TRIPLED) (1 REQD). NAIL THE FIRST PIECE TO THE TRAILER FLOOR W/8-10d NAILS. NAIL EACH ADDITIONAL PIECE IN A LIKE MANNER. SEE THE HEADER NAILING CHART ON PAGE 7.
- ③ LTL SPACER ASSEMBLY (1 REQD). SEE THE DETAIL ON PAGE 16.

SPECIAL NOTES:

- 1. A 2-UNIT LOAD IS SHOWN IN AN 8'-2" WIDE (INSIDE DIMENSION) VAN TRAILER. TRAILERS OF OTHER WIDTHS CAN BE USED.
- 2. A TRAILER EQUIPPED WITH ROUNDED FRONT CORNERS IS SHOWN. IF THE TRAILER TO BE LOADED HAS A SQUARE FRONT, OMIT THE FORWARD BLOCKING ASSEMBLY AND POSITION THE CONTAINERS DIRECTLY AGAINST THE TRAILER FRONT WALL.

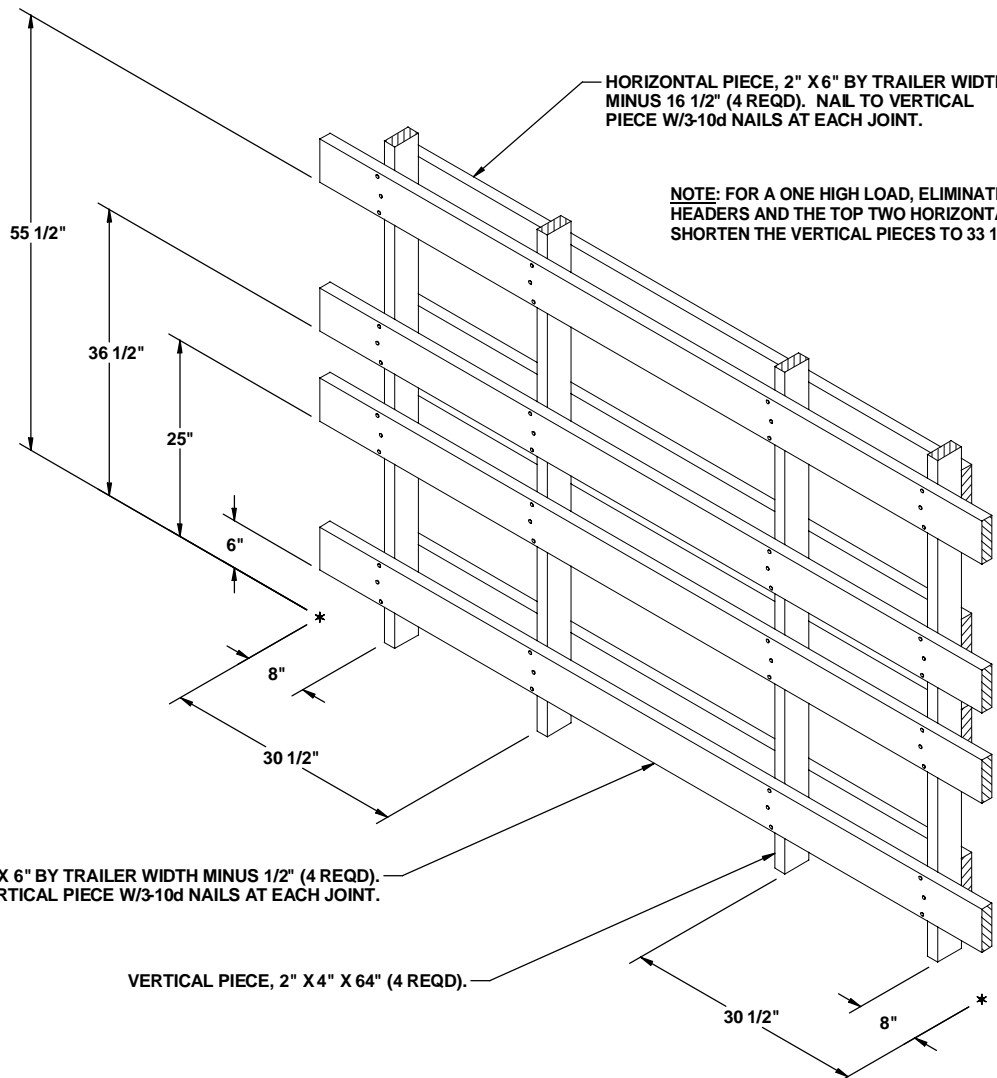

FORWARD BLOCKING ASSEMBLY



ONE SEAL WITH TWO PAIR OF NOTCHES.

STRAP JOINT A

METHOD OF SECURING A STRAP JOINT WHEN USING A NOTCH-TYPE SEALER.




TWO SEALS, BUTTED TOGETHER, WITH TWO PAIR OF CRIMPS EACH SEAL.


STRAP JOINT B

METHOD OF SECURING A STRAP JOINT WHEN USING A CRIMP-TYPE SEALER.

END-OVER-END LAP JOINT DETAILS

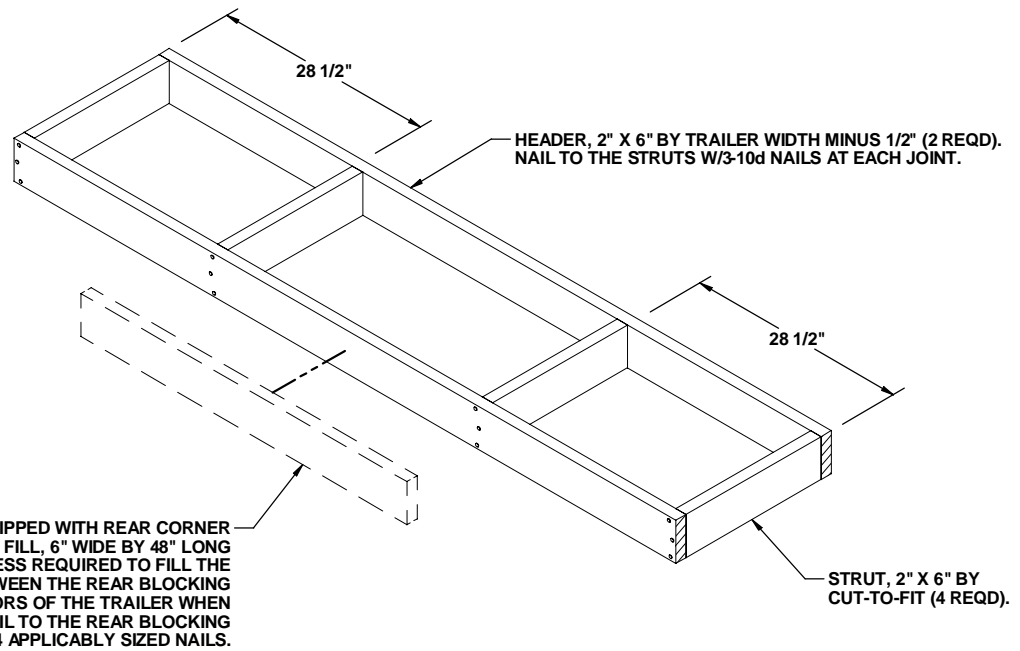

REAR BLOCKING ASSEMBLY

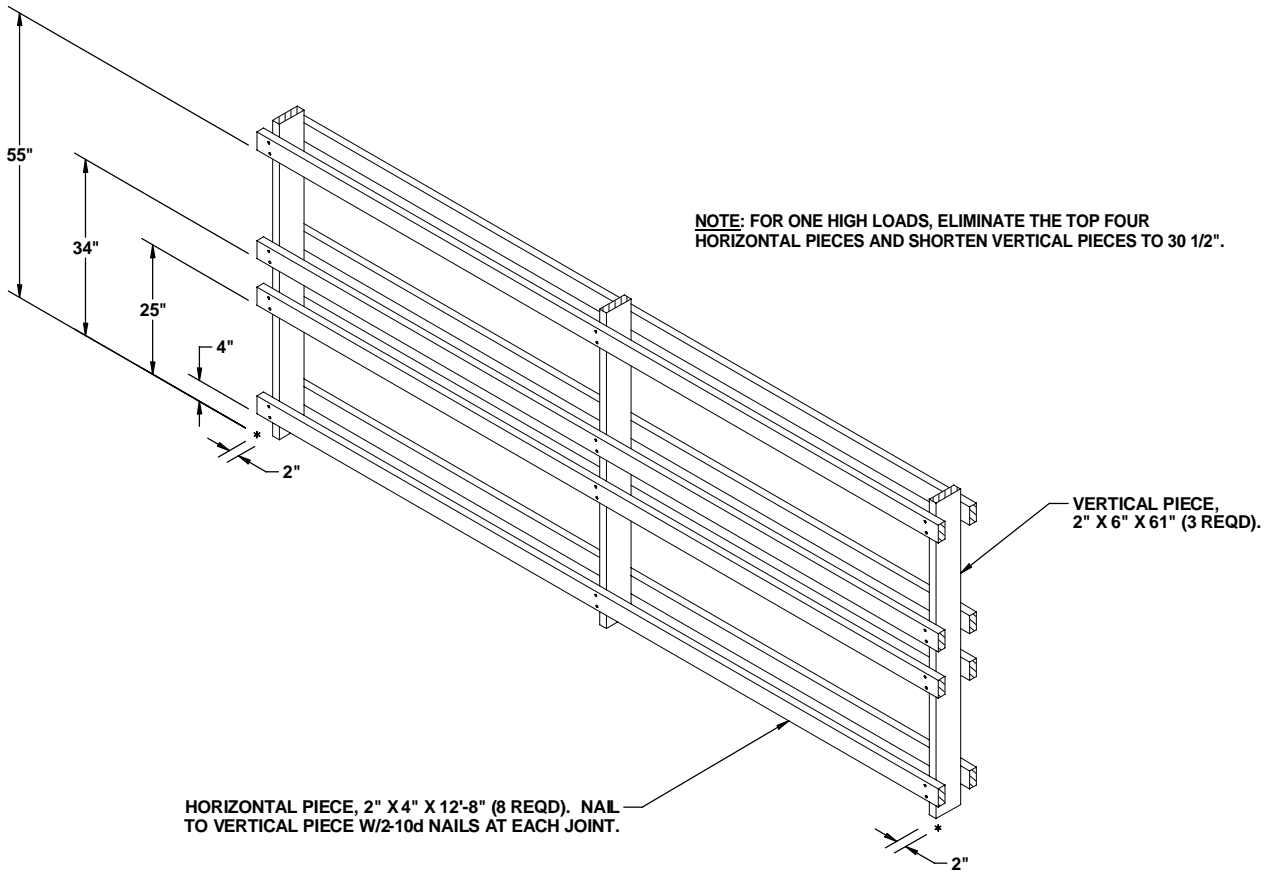

CRIB FILL ASSEMBLY

STRUT, 2" X 6" BY CUT-TO-FIT (4 REQD).

28 1/2"

HEADER, 2" X 6" BY TRAILER WIDTH MINUS 1/2" (2 REQD). NAIL TO THE STRUTS W/3-10d NAILS AT EACH JOINT.

28 1/2"

STRUT BRACING, 2" X 4" BY TRAILER WIDTH MINUS 1/2" (1 REQD FOR EVERY 7'-0" OF STRUT LENGTH FOR STRUTS LONGER THAN 7'-0"). NAIL TO THE STRUTS W/2-10d NAILS AT EACH JOINT.

SPACER ASSEMBLY

48 1/2"

HEADER, 2" X 6" X 12'-9" (2 REQD). NAIL TO STRUT W/3-10d NAILS AT EACH JOINT.

48 1/2"

STRUT, 2" X 6" BY CUT TO FIT (4 REQD).

LTL SPACER ASSEMBLY