

LOADING AND BRACING[⊕] IN SIDE OPENING ISO CONTAINERS OF MK83 (1,000 POUND) BOMBS ON MK11 SERIES METAL PALLETS

INDEX

ITEM	PAGE(S)
TYPICAL LOADING PROCEDURES - - - - -	2
GENERAL NOTES AND MATERIAL SPECIFICATIONS - - - - -	3
PALLET UNIT DETAIL - - - - -	4
DETAILS - - - - -	4-7
LESS-THAN-FULL-LOAD PROCEDURES - - - - -	8


DISTRIBUTION STATEMENT A:

APPROVED FOR PUBLIC RELEASE
DISTRIBUTION IS UNLIMITED.

® THE PROCEDURES SHOWN HEREIN ARE APPLICABLE TO LOADS THAT ARE TO
BE SHIPPED BY TRAILER/CONTAINER-ON-FLATCAR (T/COFC) RAIL, MOTOR, OR
WATER CARRIERS.

U.S. ARMY MATERIEL COMMAND DRAWING

APPROVED, U.S. ARMY JOINT MUNITIONS COMMAND		CAUTION: VERIFY PRIOR TO USE AT HTTPS://MHP.REDSTONE.ARMY.MIL THAT THIS IS THE MOST CURRENT VERSION OF THIS DOCUMENT. THIS IS PAGE 1 OF 8.				
RUS.ALLEN.J .1230354282	Digitally signed by RUS.ALLEN.J.1230354282 Date: 2018.03.27 15:15:04 -05'00'	DO NOT SCALE		MARCH 2018		
		ENGINEER OR TECHNICIAN	BASIC REV.			MADELINE BANKS
APPROVED BY ORDER OF COMMANDING GENERAL, U.S. ARMY MATERIEL COMMAND	ENGINEERING DIVISION	FIEFFER.LAURA .A.1230375727		Digitally signed by FIEFFER.LAURA.A.1230375727 Date: 2018.03.13 09:21:38 -05'00'		
SHIMP.UPTON .R.1231257183	Digitally signed by SHIMP.UPTON.R.1231257183 Date: 2018.03.28 08:41:26 -05'00'	TEST ENGINEER	FELICIANO.AD IN.1259200373		Digitally signed by FELICIANO.ADIN.1259200373 Date: 2018.03.20 15:05:51 -05'00'	
		TEST REPORT	NA	THOMAS.CARL.AN THONY.1104621372		Digitally signed by THOMAS.CARL.ANTHONY.11046 21372 Date: 2018.03.20 15:39:22 -05'00'
U.S. ARMY DEFENSE AMMUNITION CENTER	EXPLOSIVE SAFETY DIRECTORATE	CLASS	DIVISION	DRAWING	FILE	
		19	48	4361	15PB1017	

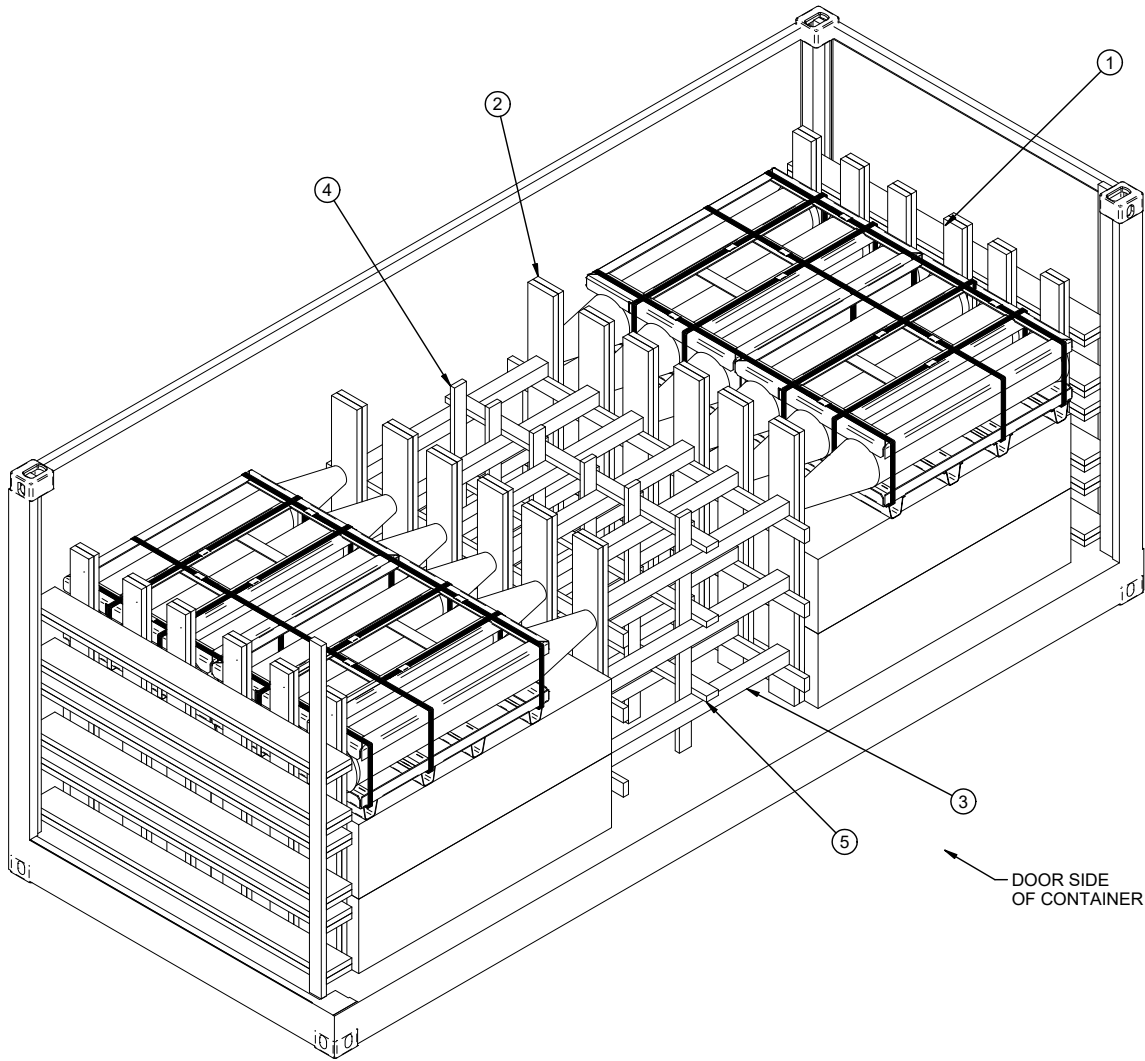

ISOMETRIC VIEW

KEY NUMBERS

- ① END BLOCKING ASSEMBLY (2 REQD). SEE THE DETAIL ON PAGE 5.
- ② CENTER GATE (2 REQD). SEE THE DETAIL ON PAGE 6.
- ③ STRUT, 4" X 4" BY CUT-TO-FIT (REF: 55-7/8") (18 REQD). TOENAIL TO THE CENTER GATES W/2-12d NAILS AT EACH END. SEE THE "BEVEL-CUT" DETAIL ON PAGE 4.
- ④ VERTICAL STRUT BRACING, 2" X 4" BY A LENGTH TO EXTEND A MINIMUM OF 2" ABOVE THE TOP STRUT (AS REQD). NAIL TO THE STRUTS W/3-10d NAILS AT EACH JOINT. SEE GENERAL NOTE "Q" ON PAGE 3.
- ⑤ HORIZONTAL STRUT BRACING, 2" X 4" BY A LENGTH TO EXTEND A MINIMUM OF 2" BEYOND OUTER EDGE OF STRUTS (AS REQD). NAIL TO THE STRUTS W/2-12d NAILS AT EACH JOINT. SEE GENERAL NOTE "Q" ON PAGE 3.

BILL OF MATERIAL

LUMBER	LINEAR FEET	BOARD FEET
2" X 4"	124	83
2" X 6"	138	138
2" X 8"	314	419
4" X 4"	84	112
NAI LS	NO. REQD	POUNDS
10d (3")	528	8-1/4
12d(3-1/4")	72	1-1/4

LOAD AS SHOWN

ITEM	QUANTITY	WEIGHT (APPROX)
PALLET UNIT	12	38,100 LBS
DUNNAGE		1,511 LBS
CONTAINER		6,050 LBS
TOTAL WEIGHT		42,781 LBS (APPROX)

GENERAL NOTES


(GENERAL NOTES CONTINUED)

- A. THIS DOCUMENT HAS BEEN PREPARED AND ISSUED IN ACCORDANCE WITH AR 740-1 AND AUGMENTS TM 743-200-1 (CHAPTER 5).
- B. THE SPECIFIED OUTLOADING PROCEDURES ARE APPLICABLE TO LOADS OF MK83 (1,000 POUND) BOMBS ON MK11 SERIES METAL PALLETS. SUBSEQUENT REFERENCE TO PALLET UNIT HEREIN MEANS THE PALLET UNIT WITH AMMUNITION ITEMS. SEE PAGE 4 AND NAVY MIL-STD 1323-35 FOR DETAILS OF THE PALLET UNIT. **CAUTION:** REGARDLESS OF THE QUANTITY OF PALLET UNITS TO BE SHIPPED, THE "MAXIMUM GROSS WEIGHT" OF THE SIDE OPENING ISO CONTAINER MUST NOT BE EXCEEDED.
- C. THE LOAD AS SHOWN IS BASED ON A 6,500 POUND 20' LONG BY 8' WIDE BY 8'-6" HIGH SIDE OPENING ISO CONTAINER WITH INSIDE DIMENSIONS OF 19'-6-1/4" LONG BY 90" WIDE BY 89" HIGH, WITH A MAXIMUM GROSS WEIGHT OF 52,910 POUNDS. OLDER/OTHER CONTAINERS MAY HAVE DIFFERENT INSIDE MEASUREMENTS, VERIFY INSIDE CONTAINER DIMENSIONS PRIOR TO FABRICATING DUNNAGE. THE LOAD IS DESIGNED FOR TRAILER/CONTAINER-ON-FLATCAR (T/COFC) SHIPMENT, HOWEVER, THE LOAD AS DESIGNED CAN ALSO BE MOVED BY OTHER SURFACE MODES OF TRANSPORT. **NOTICE:** OTHER CONTAINERS OF THE SAME DESIGN CONFIGURATION CAN BE USED.
- D. WHEN LOADING PALLET UNITS, THEY ARE TO BE POSITIONED SO AS TO ACHIEVE A TIGHT LOAD (TIGHT AGAINST THE DUNNAGE ASSEMBLIES). THE UNBLOCKED SPACE ACROSS THE WIDTH OF A LOAD BAY IS NOT TO EXCEED 1-1/2". FILL MATERIAL MAY BE INSTALLED BETWEEN THE DOOR AND THE LADING UNITS.
- E. A STAGGERED NAILING PATTERN WILL BE USED WHENEVER POSSIBLE WHEN NAILS ARE DRIVEN INTO JOINTS OF DUNNAGE ASSEMBLIES OR WHEN LAMINATING DUNNAGE. ADDITIONALLY, THE NAILING PATTERN FOR AN UPPER PIECE OF LAMINATED DUNNAGE WILL BE ADJUSTED AS REQUIRED SO THAT A NAIL FOR THAT PIECE WILL NOT BE DRIVEN THROUGH ONTO OR RIGHT BESIDE A NAIL IN A LOWER PIECE.
- F. THIS DRAWING DEPICTS A 12-PALLET UNIT CONFIGURATION, WITH A LADING WEIGHT OF 38,100 POUNDS. DUE TO RESTRICTIONS ENACTED BY THE SURFACE DEPLOYMENT AND DISTRIBUTION COMMAND AND THE JOINT MUNITIONS COMMAND, ANY ISO CONTAINER DESTINED TO BE MOVED OVER CONUS HIGHWAYS CAN NOT EXCEED 40,000 POUNDS GROSS WEIGHT.
- G. IN SOME CONTAINERS THERE IS A SLOT AT THE CORNERS OF THE ENDWALL. PIECES OF DUNNAGE MATERIAL MUST BE LAMINATED TO THE BUFFER PIECES ON THE END BLOCKING ASSEMBLY TO PROVIDE A FLAT SURFACE FOR THE BUFFER PIECES. A PIECE OF 2" X 4", 2" X 3" OR A SPECIAL WIDTH PIECE CUT-TO-FIT CAN BE USED. THIS FILL PIECE WILL BE NAILED WITH ONE APPROPRIATELY SIZED NAIL EVERY 12". NOTE THAT SOME CONTAINERS ARE EQUIPPED WITH "TIE-BARS" IN THE CORNER SLOT, WHICH PRECLUDE THE USE OF A FULL HEIGHT FILL PIECE. WHEN "TIE-BARS" ARE PRESENT, THE FILL PIECE MUST BE INSTALLED IN SEGMENTS DESIGNED TO FIT BETWEEN THE "TIE-BARS" VERTICALLY. THE FILL PIECE(S) IS NOT REQUIRED WHEN THE CORNER PORTIONS OF THE CONTAINER FORWARD WALL ARE SMOOTH AND FLAT. DO NOT ALLOW ANY DUNNAGE ASSEMBLY TO CONTACT THE CONTAINER ENDWALLS, ONLY THE CORNER POSTS OF THE CONTAINER SHOULD BE USED FOR FORWARD LONGITUDINAL BLOCKING.
- H. WHETHER A CONTAINER IS FULL OR IS LOADED WITH A REDUCED QUANTITY OF LADING UNITS, THE LENGTHWISE CENTER OF GRAVITY OF THE LOAD MUST BE WITHIN 12", IN EITHER DIRECTION, OF THE MID-POINT OF THE CONTAINER.
- J. **CAUTION:** DO NOT NAIL DUNNAGE MATERIAL TO THE CONTAINER WALLS OR FLOOR. ALL NAILING WILL BE WITHIN THE DUNNAGE
- K. PORTIONS OF THE CONTAINER DEPICTED WITHIN THIS DRAWING, SUCH AS THE SIDEWALL, HAVE NOT BEEN SHOWN IN THE LOAD VIEWS FOR CLARITY PURPOSES.
- L. **MAXIMUM LOAD WEIGHT CRITERIA:**
- THE MAXIMUM LOAD WEIGHTS ARE CONTROLLED BY EQUIPMENT CAPABILITY FACTORS. ALTHOUGH THE HEAVIEST MAXIMUM LOADS ARE DELINEATED IN THE LOAD VIEWS, PROVISIONS ARE INCLUDED WITHIN THIS DRAWING SO THAT THE BASIC LOADS CAN BE ADJUSTED TO SATISFY A LESSER QUANTITY OF LADING UNITS. DEPENDING ON TRANSPORTATION ROUTING, IT MAY BE NECESSARY TO REDUCE THE LOAD WEIGHT TO SATISFY "WEIGHT LAWS" OF CERTAIN STATES. ALSO, IT MAY BE NECESSARY TO REDUCE THE LOAD WEIGHT TO SATISFY OTHER WEIGHT RESTRICTIONS IMPOSED ON THE INTERMODAL CONTAINER SYSTEM.
- L. REQUIREMENTS CITED WITHIN THE ASSOCIATION OF AMERICAN RAILROADS (AAR) INTERMODAL LOADING GUIDE APPLY WHEN THE SHIPMENT MOVES BY TRAILER/CONTAINER-ON-FLATCAR (T/COFC). SPECIAL T/COFC NOTES FOLLOW:
1. A LOADED CONTAINER MUST BE ON A CHASSIS EQUIPPED WITH TWO BOGIE ASSEMBLIES WHEN BEING MOVED IN TOFC SERVICE.
 2. THE LOAD LIMIT OF A T/COFC RAILCAR MUST NOT BE EXCEEDED, NOR WILL A CAR BE LOADED SO THAT THE TRUCK UNDER ONE END OF THE CAR CARRIES MORE THAN ONE-HALF OF THE LOAD LIMIT FOR THAT CAR.
- M. DURING INTRASTATE AND/OR INTERSTATE MOVES BY MOTOR CARRIER, A PROPER CHASSIS OR MODIFIED FLATBED TRAILER MUST BE USED TO PRECLUDE VIOLATION OF ONE OR MORE "WEIGHT LAWS" APPLICABLE TO THE STATE OR STATES INVOLVED.
- N. CONVERSION TO METRIC EQUIVALENTS: DIMENSIONS WITHIN THIS DOCUMENT ARE EXPRESSED IN INCHES AND WEIGHTS ARE EXPRESSED IN POUNDS. WHEN NECESSARY, THE METRIC EQUIVALENTS MAY BE COMPUTED ON THE BASIS OF ONE INCH EQUALS 25.4MM AND ONE POUND EQUALS 0.454 KG.
- O. THE QUANTITY OF PALLET UNITS SHOWN IN THE LOAD ON PAGE 2 MAY BE REDUCED FOR SHIPMENT, IF DESIRED. SEE THE "LESS-THAN-FULL LOAD PROCEDURE" ON PAGE 8.
- P. DUNNAGE LUMBER SPECIFIED IS OF NOMINAL SIZE. FOR EXAMPLE, 1" X 4" MATERIAL IS ACTUALLY 3/4" THICK BY 3-1/2" WIDE AND 2" X 6" MATERIAL IS ACTUALLY 1-1/2" THICK BY 5-1/2" WIDE.
- Q. LOAD-BLOCKING STRUTS WHICH ARE 48" OR LONGER MUST BE STIFFENED BY THE APPLICATION OF HORIZONTAL AND VERTICAL STRUT BRACING AS SHOWN IN THE LOADS ON PAGES 2 AND 8. BRACING IS NOT REQUIRED IF THE STRUTS FOR THE LOAD BEING SHIPPED ARE SHORTER THAN 48". THE LENGTH OF THE LOAD-BLOCKING STRUTS SHOULD BE KEPT AS SHORT AS POSSIBLE (APPROX 18" MINIMUM), BUT IN THE EVENT IT IS NECESSARY TO USE STRUTS WHICH ARE 8'-0" OR MORE IN LENGTH, IT WILL BE NECESSARY TO APPLY AN ADDITIONAL SET OF HORIZONTAL AND VERTICAL STRUT BRACING PIECES. STRUT BRACING SHOULD BE APPLIED SO AS TO PROVIDE NEARLY EQUAL SPACES BETWEEN THE BRACING PIECES AND THE CENTER GATES AND/OR BETWEEN ADJACENT STRUT BRACING PIECES. NOTE THAT HORIZONTAL STRUT BRACING PIECES FOR THE UPPER LEVEL OF STRUTS FOR ALL BUT THE UPPERMOST TIER OF A LOAD MAY BE DIFFICULT TO APPLY TO THE TOP SURFACES OF THE STRUT AS DEPICTED. STRUT BRACING WILL BE EQUALLY EFFECTIVE IF APPLIED TO THE UNDER SIDE OF THOSE STRUTS.
- R. ANTI-CHAFING MATERIAL MAY BE INSTALLED AT POINTS OF CONTACT BETWEEN PALLET UNITS, AND BETWEEN PALLET UNITS AND THE SIDE OPENING CONTAINER, IF DESIRED, TO PREVENT CHAFING DAMAGE TO PALLET UNITS PAINT AND MARKINGS.
- S. RECOMMENDED SEQUENTIAL LOADING PROCEDURES:
1. PREFABRICATE TWO END BLOCKING ASSEMBLIES AND TWO CENTER GATES.
 2. INSTALL ONE END BLOCKING ASSEMBLY.
 3. LOAD SIX PALLET UNITS.
 4. REPEAT STEPS 2 AND 3.
 5. INSTALL THE CENTER GATES.
 6. INSTALL THE STRUTS AND VERTICAL AND HORIZONTAL STRUT BRACING.

MATERIAL SPECIFICATIONS


- LUMBER - - - - - : SEE TM 743-200-1 (DUNNAGE LUMBER) AND VOL-UNTARY PRODUCT STANDARD PS 20.
- NAILS - - - - - : ASTM F1667; COMMON STEEL NAIL NLCMS OR NLCMMS).
- WIRE, CARBON STEEL - : ASTM A853; ANNEALED AT FINISH, BLACK OXIDE FINISH, 0.0800" DIA, GRADE 1006 OR BETTER.
- ANTI-CHAFING MATERIAL - - - - - : MIL-PRF-121 (OR EQUAL); NEUTRAL BARRIER MATERIAL.

(CONTINUED AT RIGHT)

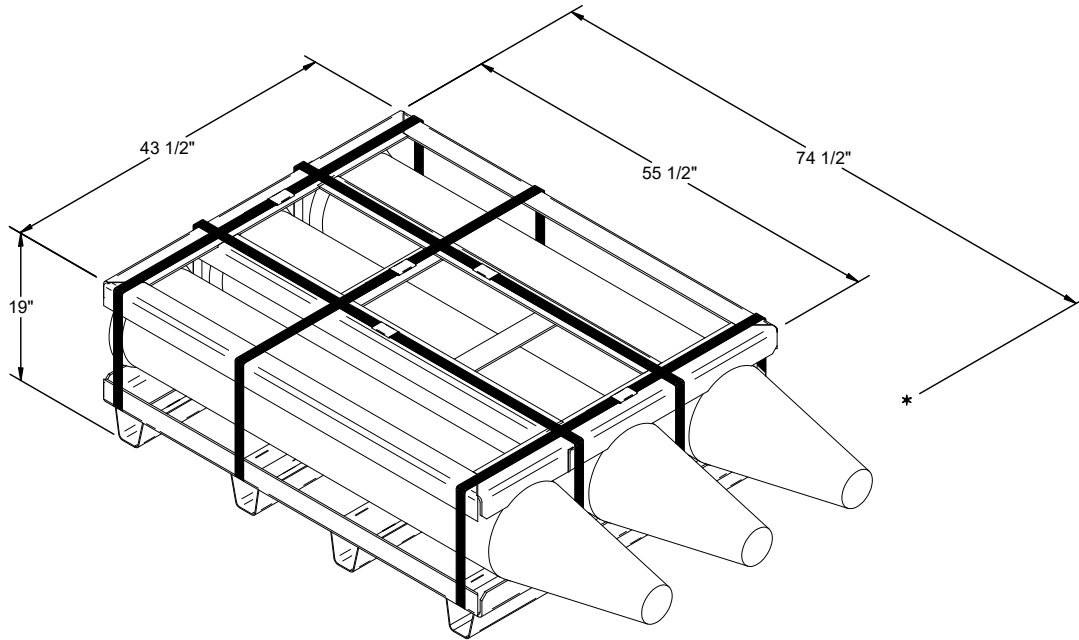


PALLET UNIT DATA

GROSS WEIGHT	-----	3,175 LBS
CUBE	-----	35.6 CU FT

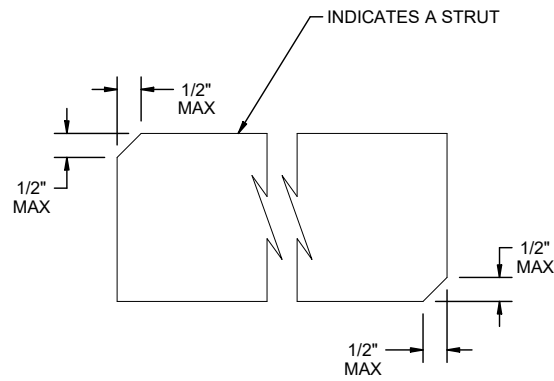


BEVEL CUT

IF DESIRED, EACH END OF A STRUT MAY BE BEVEL-CUT AS SHOWN ABOVE TO FACILITATE INSTALLING THE STRUTS WITH A "DRIVE" FIT.

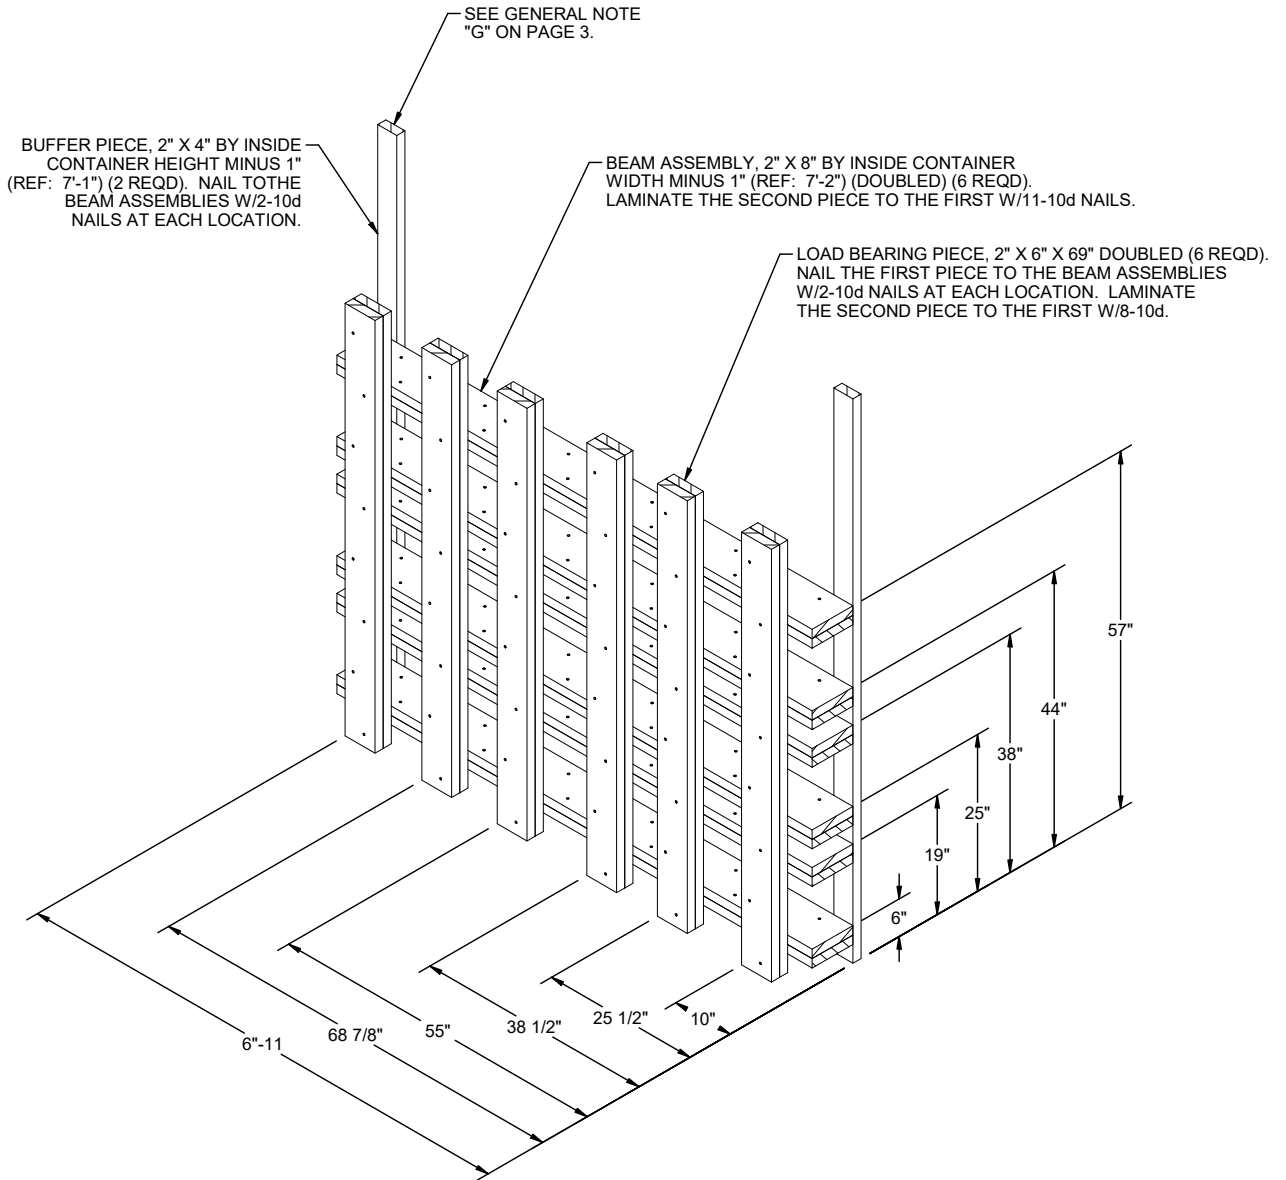


END BLOCKING

THE DETAIL ABOVE DEPICTS A TYPICAL BLOCKING ASSEMBLY AS USED ON PAGES 2 AND 8. FOR A 2-HIGH LOAD, ELIMINATE THE UPPER TWO BEAM ASSEMBLIES AND REDUCE THE HEIGHT OF THE LOAD BEARING PIECES TO 48". FOR A 1-HIGH LOAD, ELIMINATE THE UPPER FOUR BEAM ASSEMBLIES AND REDUCE THE HEIGHT OF THE LOAD BEARING PIECES TO 27".

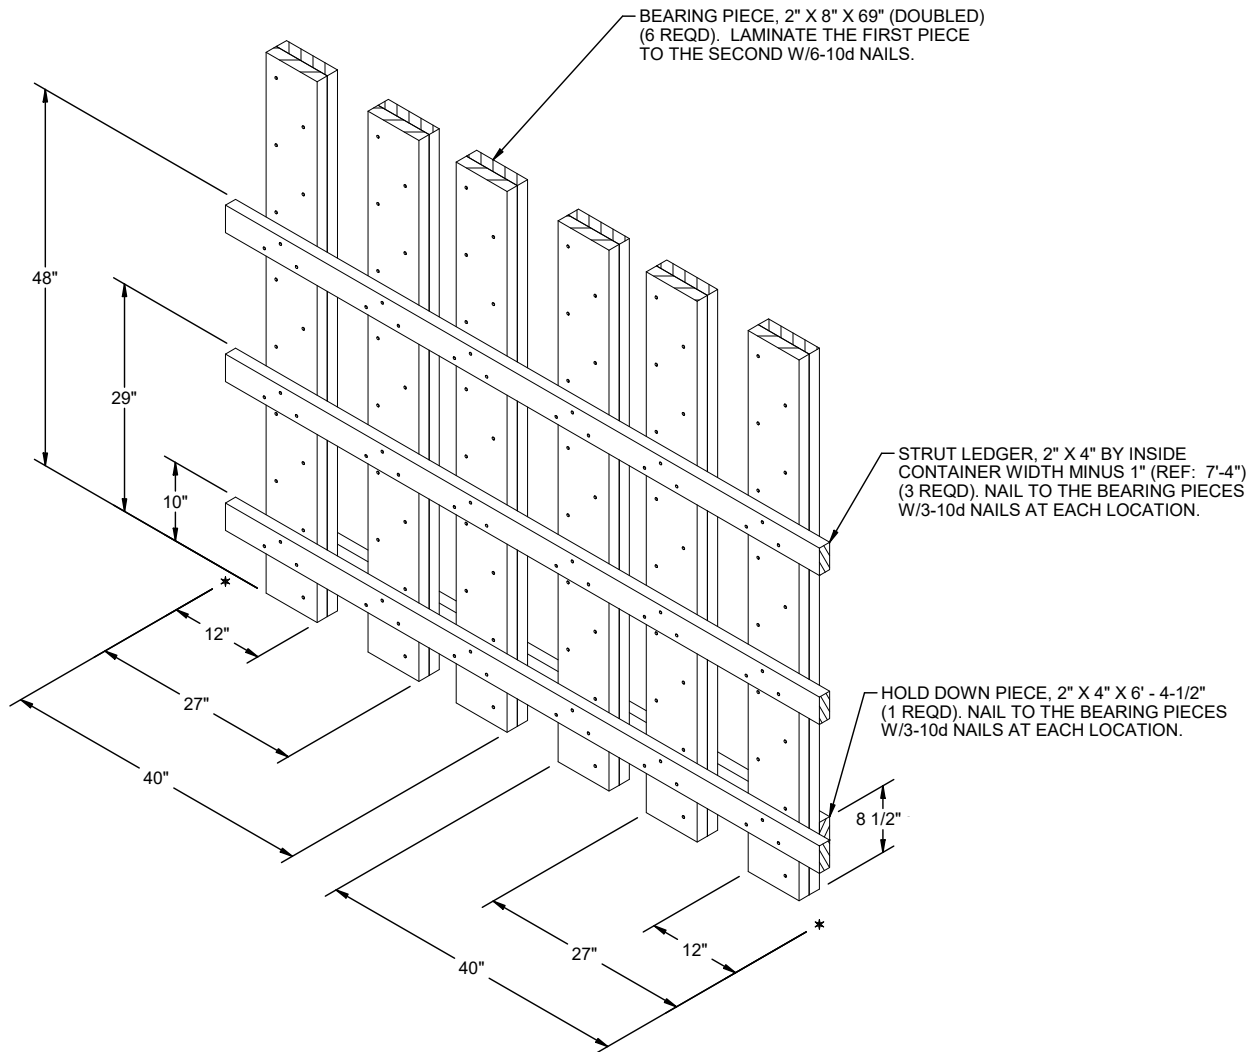


CENTER GATE

THE DETAIL ABOVE DEPICTS THE TYPICAL ASSEMBLY AS USED ON PAGES 2 AND 8. THE HOLD DOWN PIECE SHOULD FIT SNUGLY BENEATH THE BOMB NOSE. ADJUSTMENTS IN HEIGHT MAY BE MADE TO ALLOW FOR VARIATION IN BOMB NOSE HEIGHT. FOR A 2-HIGH LOAD, ELIMINATE THE UPPER STRUT LEDGER AND SHORTEN THE BEARING PIECES TO 50". FOR A 1-HIGH LOAD, ELIMINATE THE UPPER TWO STRUT LEDGERS AND SHORTEN THE BEARING PIECES TO 24".

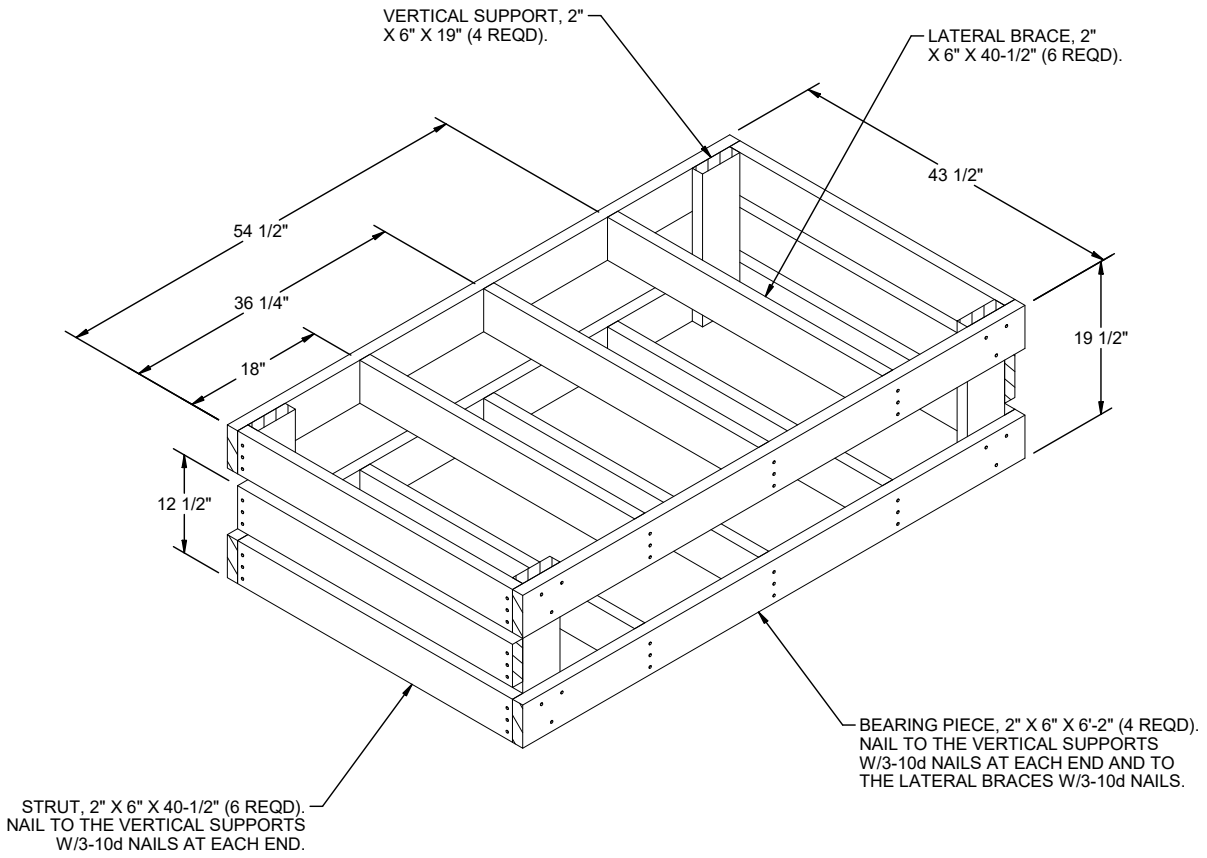

FILLER ASSEMBLY
FOR MINUS ONE PALLET UNIT.

TIE WIRE, .080" DIA BY 24" LONG (2 REQD PER FILLER ASSEMBLY). INSTALL TO FORM A COMPLETE LOOP AROUND THE FILLER ASSEMBLY AND AN ADJACENT PALLET UNIT STRAP. BRING ENDS TOGETHER AND TWIST TAUT. SECURE TO THE FILLER ASSEMBLY WITH A PARTIALLY DRIVEN 10d NAIL BENT OVER THE WIRE OR THEI A STRAP STAPLE.

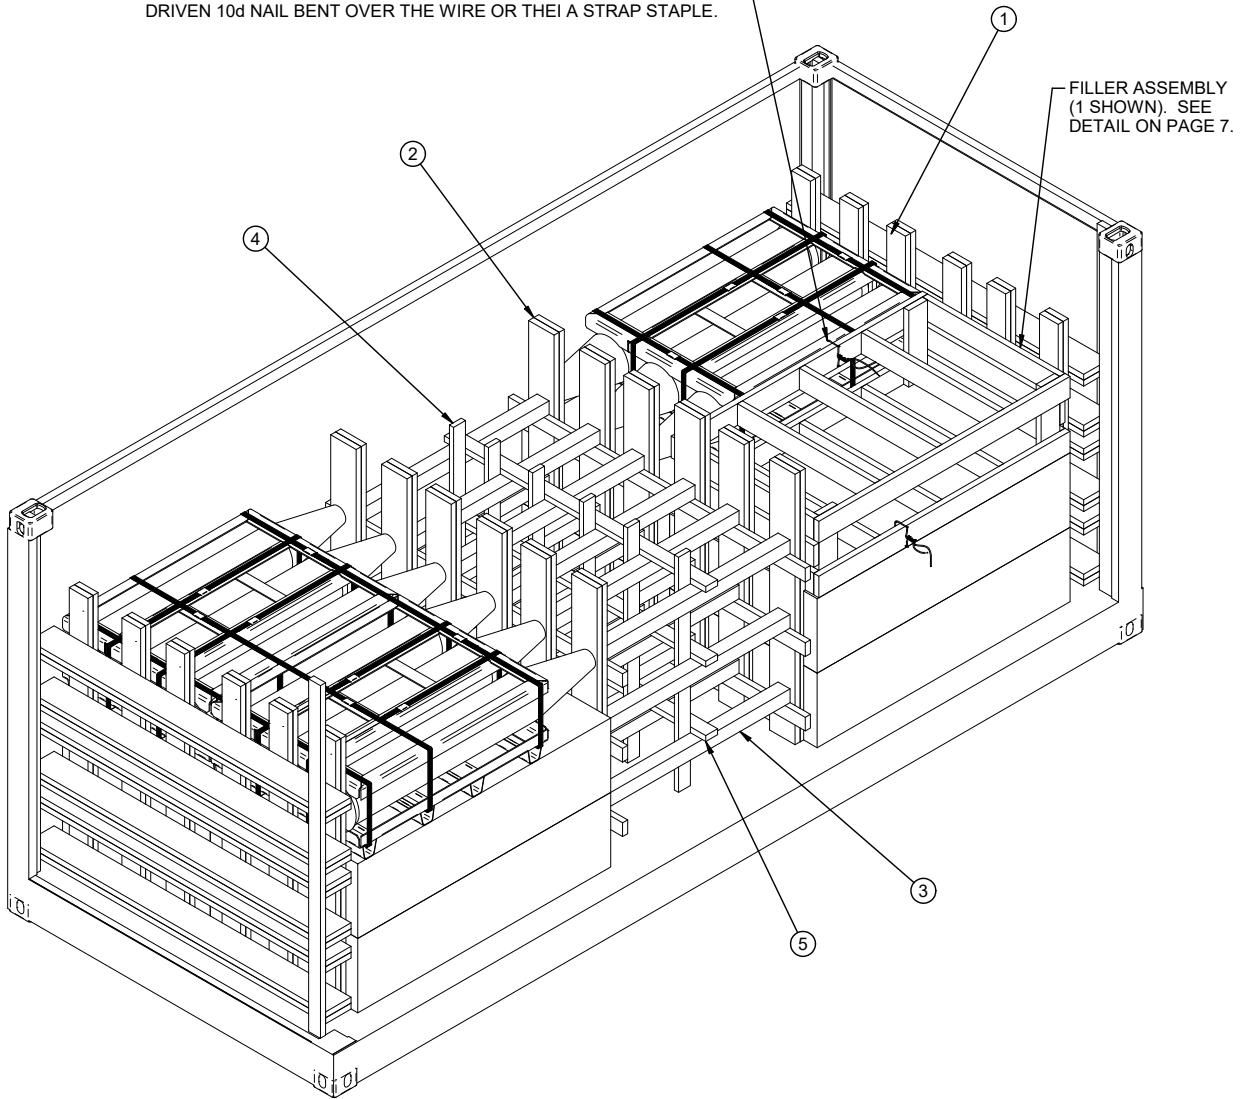

LESS-THAN-FULL-LOADPROCEDURE

THE DETAIL ABOVE DEPICTS A BLOCKING METHOD TO BE USED IN A LESS-THAN-FULL CONTAINER LOAD (LESS THAN 12 UNITS). KEY NUMBERS REFER TO KEY NUMBERS ON PAGE 2. SEE GENERAL NOTES "H" AND "O" ON PAGE 3.